



# THE ROOFING CONTRACTORS CHOICE

BAILEY METAL PRODUCTS is a family owned and operated Canadian company with a long history in the manufacturing of roofing trims. As a market leader in steel framing products, we have an expertise in roll-forming that allows us to provide a consistent high quality product at a cost-effective price.

#### Let us be your warehouse!

• Our extensive inventory and short lead times eliminate the need for 'bulk buys' that tie up your space and inventory dollars.

## **Quality Materials:**

• Bailey is known for our high quality steel and value-added features, like hemmed edges and stiffening ribs on our valley flashing.

## Standard Stock:

- 7 standard colours\*
- 3 standard thicknesses -.015" (30ga), .018" (28 ga), .021" (26 ga) (not all products stocked in all thicknesses)

### We do custom:

MONTREAL

800-263-3455

commande@bmp-group.com


Black

• Bailey is equipped to produce any custom profiles/bends/lengths that you need to complete your project.

Charcoal

TORONTO

800-668-2154

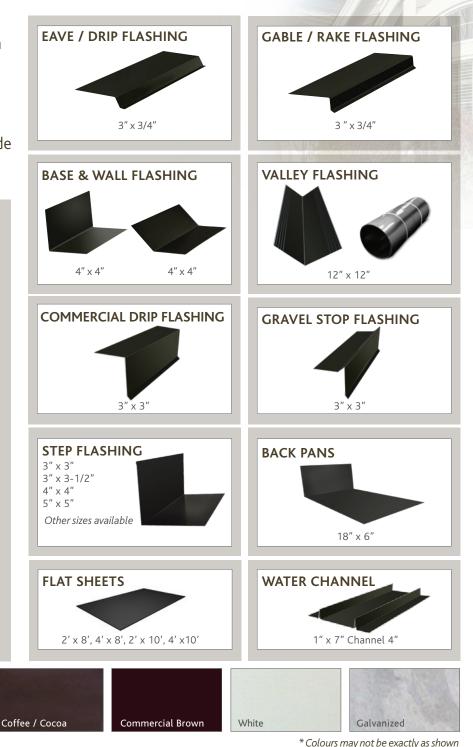

CALGARY 800-665-2013 tor-orders@bmp-group.com cal-orders@bmp-group.com

EDMONTON 800-563-1751 edm-orders@bmp-group.com

VANCOUVER 800-818-2666 van-orders@bmp-group.com



OFING TRIMS WESTERN CANADA 



PRODUCT	PROFILE	DIMENSIONS	STANDARD LENGTH	STANDARD LIFT SIZES	APPLICATIONS
SKYLIGHT FLASHING	90°	1" x 3"	10'	N/A	Skylight flashing is used to seal and protect the circumference of a skylight and channel moisture to the surface of the roof.
VALLEY FLASHING	135	12" x 12"	8' & 10'	100	Valley Flashings protect the intersection where two roof planes meet, directing rainwater runoff away from the roof. They can be used in both open and closed valley designs.
EAVE / DRIP FLASHING	113*	3" x 3/4"	8' & 10'	300	Drip edge ensures proper water run-off into the eavestrough, so it doesn't get under your roofing materials or rot the wood at the edge of the roof.
GABLE / RAKE FLASHING	90.	3" x 3/4"	8' & 10'	300	Gable/Rake Flashings are used along the gable edge of a roof to protect it from water penetration and to protect the fascia from water damage and staining.
WALL	135*	4" × 4"	8' & 10'	100	Wall flashing is typically found where the upward slope of a roof meets a wall.
BASE FLASHING	90°	4" x 4"	8' & 10'	100	Base Flashing is used at the joint between the roofing surface and a vertical surface such as a wall or a parapet.
STEP FLASHING	90°	3" x 3" 3" x 3-1/2" 4" x 4" 5" x 5"	9", 10" & 12"	5000	Step Flashing is used where the roof meets the sidewalls of dormers, chimneys, and some skylights.
BACK	90°	18" x 6"	3', 5' & 8'	N/A	Back Pans sit behind skylights and chimneys to catch and shed any water that drains onto them.
COMMERCIAL DRIP FLASHING	90° ( ) 135°	3" x 3"	8' & 10'	100	Commercial drip edge is used on commercial buildings to ensure the protection of the roof edge and proper water run-off.
GRAVEL STOP FLASHING	45* <sup>1</sup>	3" x 3"	8" & 10'	100	Gravel stop is used on flat roofs where gravel is used. The raised edge on the perimeter of the flashing ensures that the gravel stays on the roof.
WATER CHANNEL		1" x 7" Channel 4"	8'	80	Water Channel is used to direct water from a downspout over the surface of a roof. This reduces the wear and tear and the appearance of discoloration or staining on the shingles.
FLAT SHEETS		2' x 8' 4' x 8' 2' x 10' 4' x 10'	8' & 10'	100	Flat sheets are typically used by installers to make custom flashing elements to complete their roofing project.



Codes and Standards: Galvanized materials and coatings are to the requirements of ASTM A653 / A653M, "Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot Dip process."



0

**LEED Program:** At **BAILEY METAL PRODUCTS** we are committed to the advancement of environmentally friendly green building product that reduces energy consumption and waste. LEED MR c-4, MR c-5, MR c-2.2.

MONTREAL commande@bmp-group.com tor-orders@bmp-group.com cal-orders@bmp-group.com

TORONTO

CALGARY 800-665-2013

**EDMONTON** edm-orders@bmp-group.com

VANCOUVER van-orders@bmp-group.com