



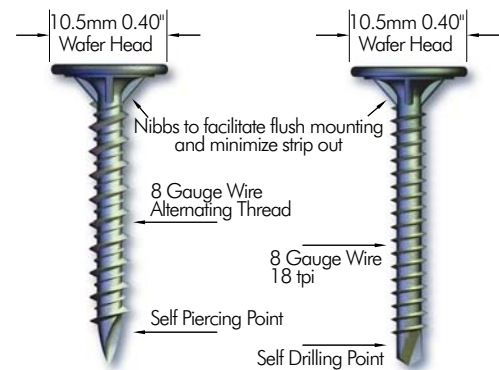

GRABBER Cement Board & High Density Board Screws

Grabber Cement Board and High Density Sheathing Screws have been specifically designed for use with Cement Board and High density exterior sheathing. These exterior grade corrosion resistant fasteners have a .40" (10.5mm) wafer head with nibbs to facilitate seating and minimize strip out. Grabber alternating thread screws are for use in wood and Grabber Self drill screws are for use for the attachment of these boards to steel from 14 to 20 gauge.

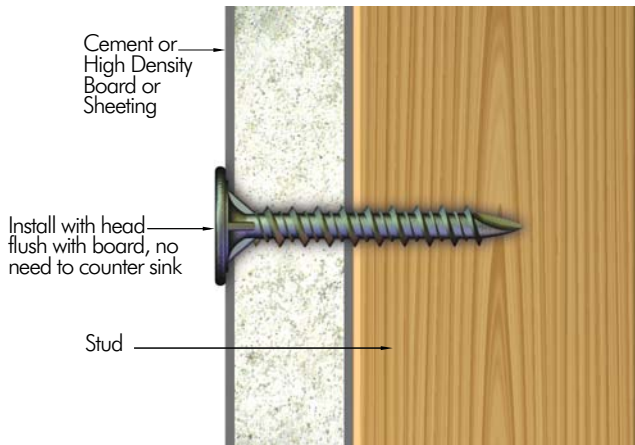

APPLICATION:

Designed specifically for the application of cement boards and high density exterior sheathings and tile-backers to wood or steel framing members.

- ▶ Three lengths available 1 1/4", 1 5/8" and 2 1/4" for wood & steel
- ▶ 1000 hr corrosion resistant finish per ASTM B117 IN 50018 (0.2I)15 cycles Kesternich.
- ▶ .40" Wafer head with nibbs for countersinking and to minimize strip out.

APPLICATION:

Designed specifically for the application of Durock, Permabase, Denshield and allcement boards and high density exterior sheathings and tile-backers to wood or steel framing members.

- ▶ Three lengths available 1 1/4", 1 5/8" and 2 1/4" for wood & steel
- ▶ 1000 hr corrosion resistant finish per ASTM B117
- ▶ .40" Wafer head with nibbs for countersinking and to minimize strip out.

PRODUCTS DATA:

ITEM	SIZE & DESCRIPTION	PACKAGING
BGCB8125HL	8 x 1-1/4" Alternating Thread	5 m
BGCB8158HL	8 x 1-5/8" Alternating Thread	4 m
BGCB8225HL	8 x 2-1/4" Alternating Thread	2 m
BGCB8125SD	8 x 1-1/4" Self-Drill	5 m
BGCB8158SD	8 x 1-5/8" Self-Drill	4 m
BGCB8225SD	8 x 2-1/4" Self-Drill	2 m

Distributed by:



GRABBER.

Grabber Concord
 205 Mason Circle,
 Concord CA 94520
 1.800.477.8876
www.grabberman.com