



BAILEY METAL PRODUCTS LIMITED

1 Caldari Road
Concord, ON L4K 3Z9
CANADA
(905) 738-9267
www.bmp-group.com

COMSLAB FLOOR SYSTEM

CSI Sections:

- 05 00 00 Metals
- 05 31 00 Steel Decking
- 05 31 13 Steel Floor Decking

1.0 RECOGNITION

The ComSlab Floor System has been evaluated as a floor deck in compliance with IBC Section 2210.1.1. The floor system has been evaluated for composition and structural performance. The ComSlab Floor System evaluated in this report complies with or is a satisfactory alternative to the following codes and regulations:

- 2018, 2015, and 2012 International Building Code® (IBC)
- 2018, 2015, and 2012 International Residential Code® (IRC)
- 2019 California Building Code (CBC) Title 24 Part 2 – attached supplement
- 2020 Florida Building Code, Building (FBC, Building) – attached supplement
- 2014 New York City Building Code (NYCBC) – attached supplement
- 2019 Chicago Building Code (Title 14B) – attached supplement

2.0 LIMITATIONS

Use of the ComSlab Floor System recognized in this report is subject to the following:

2.1 The CS210 and CS120 ComSlab deck systems are manufactured, identified, and installed in accordance with this report, the IBC, and ComSlab's published installation instructions. If there is a conflict between the manufacturer's published installation instructions and this report, the more restrictive shall take precedence.

2.2 Concrete-filled sections shall not be used to support loads that are predominantly vibratory except where vibration effects are considered in the structural analyses.

2.3 Use as part of the lateral force-resisting system is beyond the scope of this report.

2.4 Penetrations in the floor system shall be determined by the structural designer and approved by the building official.

2.5 Special inspections shall be provided in accordance with Section 3.4 of this report.

2.6 Calculations and details demonstrating that the loads applied to the decks comply with this report shall be submitted to the building official for approval. Calculations and drawings shall be prepared, signed, and sealed by a registered design professional where required by the statutes of the jurisdiction in which the project is to be constructed.

2.7 Bundles marked in accordance with Section 5.0 of this report provide the material traceability required to conform to the requirements of Section 2202.1 of the 2018 IBC (Section 2203.1 of the 2015 and 2012 IBC), and for applications under the 2012 IBC, Table 1705.2.2, Item 1 of the 2012 IBC.

3.0 PRODUCT USE

3.1 General: The ComSlab Floor System provides an in-place steel forming system and is used in conjunction with structural concrete topping and reinforcing bars as floors to support the code-required floor loads.

3.2 Design

3.2.1 General: Design for deck-only capacities shall comply with IBC Section 2210 and AISI S100. Section Properties and design base-metal thicknesses are provided in Tables 1, 2, 3, and 4 of this report. The system may also be used where an engineering design is submitted in accordance with Section R301.1.3 of the IRC.

3.2.2 Web Crippling: The ComSlab deck panels shall bear a minimum of 2 inches onto the support structure and a minimum of 4 inches at shoring supports unless a registered professional engineer designs adequate support to prevent web crippling from occurring. Tables 1, 2, 3, and 4 of this report are based on this support condition.

3.2.3 Vertical Loads: The composite deck, concrete fill, and concrete reinforcing resist out-of-plane vertical load and resistance factor design (LRFD) superimposed design live loads as specified in Tables 1, 2, 3, and 4 of this report. The tabulated loads have been reduced by the Load Factor of 1.6. All LRFD superimposed load (dead, live, wind, earthquake, etc.) combinations shall be determined by the structural designer in accordance with IBC Section 1605.2. The results shall be less than the corresponding tabulated design live load.



EXAMPLE:

Steel deck CS120 - Design thickness = 0.0375 in.
 yield stress = 50 ksi
 Reinforcing steel - Bar number = 8; yield stress = 60 ksi
 Concrete - Normal weight = 145 lb/ft³
 Overall slab depth = 10.5 in.
 Single span length = 24.0 ft

Applied Loads

Superimposed dead load

- a) Floor finish = 8.5 psf
- b) Partitions = 14.5 psf
- DL = 23.0 psf

Live load LL = 100 psf

Total applied load =

$$\{1.2/1.6(DL) + LL\} = \{0.75(23.0) + 100\} = \underline{117 \text{ psf}}$$

From the appropriate table on page 19 of this report, the maximum total load is 138 psf

When the load span exceeds the maximum unshored span in the tables, shoring shall be provided. The shoring shall be designed by the structural designer and shown at specified locations on the construction documents. Shoring removal shall comply with ACI 318-14 Section 26.11.2 or ACI 318-11 Section 6.2. Out-of-plane loads may include upward and downward vertical seismic effects, upward and downward loads due to wind, and downward loads due to transient effects and gravity. The deflections due to the dead weight of the concrete slab shall be determined in accordance with Eq.-1:

$$\Delta_{sw} = \frac{SWDP \times L^4}{10^6} \quad \text{Eq.-1}$$

Where:

- Δ_{sw} = deflection due to slab weight, in.
- SWDP = slab weight deflection parameter from load table.
- L = load span, ft.

The maximum superimposed unfactored load that causes the concrete-filled deck to deflect to a specified limit shall be determined in accordance with Eq.-2:

$$w_d = \frac{SLDP \times 10^6}{DC \times (L)^3} \quad \text{Eq.-2}$$

Where:

- w_d = Maximum deflection load, psf
- SLDP = Deflection parameter from load table,
- DC = Deflection constant such as 360
- L = Span length, feet

EXAMPLE:

Base steel thickness - 0.0375 in.
 Bar number - 9
 Slab depth - 10.5 in.
 Span length, L, - 24 feet
 From the table on page 20, SLDP = 778
 Assume DC = 360

Using Eq.-2:

$$w_d = \frac{778 \times 10^6}{360 \times (24)^3} = \underline{156 \text{ psf}}$$

For confirmation of values, the appropriate load tables shall be reviewed.

3.2.4 Support Connections: The connection of the deck and end closure to the structure shall be with welds, power-actuated fasteners, or self-drilling screws complying with Section 4.6 of this report and as designed and specified by the registered design professional based on requirements in ANSI/SDI NC. A minimum of one fastener per deck panel is required at each support. Fastener spacing shall be 24 inches on center maximum for supports parallel to the panels. Other fasteners suitable for the deck and supporting member shall be designed and specified by the registered design professional and approved by the building official.

3.3 Installation

3.3.1 Deck Panels: The deck panels shall be fastened to the structural supports with fasteners described in Sections 3.2.4 and 4.6 of this report. The ends of the deck shall bear a minimum of 2 inches onto the support structure. Supports shall be structural steel complying with IBC Chapter 22 and AISC 360; structural concrete complying with IBC Chapter 19 and ACI 318; or structural masonry complying with IBC Chapter 21 and TMS 402. The End Closure shall be fixed to the support structure prior to the decking being installed, using a minimum of one fastener per deck unit. In addition to the main structural fastening, the profile top flanges are fixed to the upper flange of the End Closure using power-actuated or self-drilling fasteners at one per profile. Fasteners shall be driven such that there is tight contact between the fastener head and the attached panels. The male trough flange shall overlap the female trough flange. The fasteners used to connect the side-laps of the panels to each other shall be minimum No. 14 1/4-14x1 self-drilling screws spaced 13.8 inches on center maximum. Every side-lap fastener shall include a ComSlab pre-punched side-lap washer.

3.3.2 Reinforcing: The reinforcing bars shall be placed in each rib profile, with a 1.57-inch clear space between the bottom flange and the underside of the bars. Shrinkage and temperature reinforcement shall be provided above the top of the deck for both directions in accordance with ACI 318-14 Section 24.4 or ACI 318-11 Section 7.12.



3.3.3 Concrete: Concrete placement shall comply with applicable provisions of the IBC and ACI 318. Before concrete placement, steel decking shall be clean and free of dirt, grease, and other debris. Shoring shall be in place before concrete placement at the locations as specified in the tables of this report. The bearing width for the shoring supports shall be 4 inches minimum. Care shall be taken to avoid the heaping of concrete in any location. Tables 1, 2, 3, and 4 of this report include construction live loads of 20 psf or 150 plf.

3.4 Special Inspection

3.4.1 Concrete: Continuous and periodic special inspection for concrete and concrete reinforcement shall be in accordance with IBC Section 1705.3. The inspector's duties include sampling and testing, verification of concrete mixes, reinforcement types and placement, concrete placement, observing sampling of concrete, field testing of fresh concrete, and the making of test specimens.

3.4.2 Steel Deck: Periodic special inspection for steel deck shall be in accordance with IBC Section 1705.2.2. The inspector's duties include verifying that the steel deck panels are of the type, size, grade, and condition specified on the approved plans and specifications and verifying the correct type, size, and location of fasteners, fastener holes, and installation for the type of connection are as specified on approved plans and specifications.

3.4.3 Statement of Special Inspections: A statement of special inspections shall be prepared by the registered design professional in charge and submitted to the building official as set forth in IBC Section 1704.3. The statement shall include the special inspector's duties noted in this section (Section 3.4 of this report).

4.0 PRODUCT DESCRIPTION

4.1 General: The ComSlab Floor System consists of cold-formed steel deck panels and end closures, concrete, reinforcing bars, welded wire reinforcement, and mechanical fasteners. The system complies with ANSI/SDI-NC.

4.2 ComSlab Deck Panels: The ComSlab deck panels are cold-formed from steel sheets into panels that resemble a fluted, flared, hat section with embossments in the webs and flange. The deck panels are available in three design thicknesses, 0.0375 inch, 0.0435 inch, and 0.0495 inch. The ends of the deck are provided with a separate end closure to provide additional web crippling strength and a permanent deck end closure to minimize grout loss during concrete placement. Steel sheets complying with ASTM A653 SS Grade 55 are cold-formed into deck shapes and closure elements having a minimum G90 galvanization coating (total on both surfaces). Panel dimensions and profiles are shown in the tables and figures of this report.

4.3 Concrete Fill: The deck panels are designed to be used with sand-lightweight or normal-weight concrete complying

with IBC Sections 1901 and 1904 and having a minimum 28-day compressive strength of 4,000 psi and proportioned in accordance with ACI 318. Normal-weight structural concrete [$w = 145$ to 150 pcf] shall have aggregate conforming to ASTM C33. Sand lightweight structural concrete [$w = 110$ to 115 pcf] shall have fine aggregate conforming to ASTM C33 and coarse aggregate conforming to ASTM C330. The concrete shall extend a minimum of 2.5 inches above the top surface of the steel deck panel and shall be reinforced with a single reinforcing bar in the bottom of each flute.

4.4 Reinforcing Bars: The reinforcing bars (rebar) shall comply with ASTM A615, A706, or A996, minimum Grade 60, and range in size from No. 3 to No. 11 ($\frac{3}{8}$ inch to $1\frac{3}{8}$ inch diameter).

4.5 Shrinkage and Temperature Control Reinforcement: The reinforcing in the top of the concrete is required for shrinkage and temperature control and shall be with a minimum area of 0.00075 times the area of concrete above the deck, and not less than 6 x 6 W1.4 x W1.4 steel welded wire plain reinforcement complying with ASTM A1064, placed above the top of the steel deck and positioned towards the top of the slab with a minimum $\frac{3}{4}$ inch cover. In place of steel welded wire, fibers may be substituted. The fibers shall be specifically recognized for use in concrete-filled steel decks by an evaluation report issued by an approved evaluation service agency.

4.6 Fasteners: The fasteners used to connect the side-laps of the panels to each other and the end closures to the structure and the deck shall be self-drilling screws complying with Section J4 of AISI S100 (Section E4 of AISI S100 for the 2015 and 2012 IBC) or an evaluation report issued by an approved evaluation service agency. The fasteners used to connect the deck panels to the supporting structure shall be welds, self-drilling screws, or power-actuated fasteners complying with Sections J2, J4, or J5, respectively, of AISI S100 (Sections E2, E4, or E5, respectively, of AISI S100 for the 2015 and 2012 IBC); or an evaluation report issued by an approved evaluation service agency. The capacity of the screws and power-actuated fasteners to the supporting material (steel, concrete, or masonry) shall be documented in an evaluation report issued by an approved evaluation service agency.


4.7 Accessories: End Closures are fabricated using G90 galvanized steel sheet, 0.060 inch in thickness. Side-lap Washers are fabricated using G60 galvanized steel sheet, 0.048 inch in thickness.

5.0 IDENTIFICATION

Each bundle of decking is marked with labels with the Bailey Metal Products Limited name, the deck type, the minimum base-metal thickness (uncoated), the minimum specified yield strength, and the Evaluation Report number ER-277.



Either IAPMO UES Mark of Conformity may also be used as shown below:

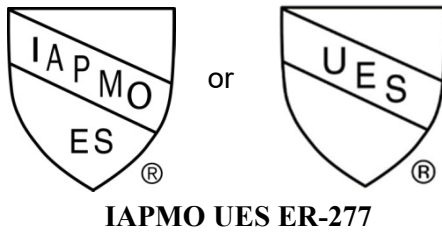

IAPMO UES ER-277

6.0 SUBSTANTIATING DATA

6.1 Manufacturer's descriptive literature and installation instructions.

6.2 Test reports from laboratories in compliance with ISO/IEC 17025.

6.3 Data in accordance with IAPMO UES EC 007-2024, Evaluation Criteria for Steel Composite, Non-Composite, and Roof Deck Construction.

6.4 Quality Assurance Documentation.

7.0 STATEMENT OF RECOGNITION

This evaluation report describes the results of research completed by IAPMO Uniform Evaluation Service on the ComSlab Floor System to assess its conformance to the codes shown in Section 1.0 of this report and documents the product's certification.

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 1: CS210 LWC - #3 REBAR									
IMPERIAL UNITS									
Base Steel Thickness = 0.0375"									
Area of Steel Deck Included									
# 3 Rebar	Light Weight Concrete = 110 lb/ft ³								
SLAB WEIGHT (psf)	40.2	44.8	49.3	53.9	58.5	63.1	67.7	72.3	
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	13.6	13.0	12.5	12.1	11.7	11.3	11.0	10.6	
MAX. UNSHORED TWO SPAN (ft)	11.0	10.2	9.5	8.9	8.3	7.8	7.4	7.0	
MAX. UNSHORED THREE SPAN (ft)	12.5	11.6	10.8	10.1	9.5	8.9	8.4	8.0	
I _u (in ⁴)	47.2	54.0	61.2	69.0	77.5	86.6	97	108	
I _c (in ⁴)	18.6	20.7	22.9	25.3	27.9	30.6	33.4	36.4	
DEFLECTION PARAMETER (SLDP)	518	588	662	742	829	922	1023	1132	
DEFLECTION PARAMETER (SWDP)	0.649	0.632	0.615	0.596	0.576	0.555	0.534	0.513	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	184	195	206	216	227	238	249	259
	14.5	170	179	189	199	209	218	228	238
	15.0	157	166	174	183	192	201	210	219
	15.5	145	153	161	169	177	185	193	202
	16.0	134	141	149	156	164	171	178	186
	16.5	124	131	138	144	151	158	165	171
	17.0	115	121	128	134	140	146	152	158
	17.5	107	113	118	124	130	135	141	146
	18.0	100	105	110	115	120	125	130	135
	18.5	93	97	102	107	111	116	121	125
	19.0	86	91	95	99	103	107	112	116
	19.5	80	84	88	92	96	100	104	107
	20.0	75	78	82	85	89	92	96	99
	20.5	70	73	76	79	83	86	89	92
	21.0	65	68	71	74	77	79	82	85
	21.5	61	63	66	68	71	74	76	79
	22.0	57	59	61	64	66	68	70	73
	22.5	53	55	57	59	61	63	65	67
	23.0	49	51	53	55	57	58	60	62
	23.5	46	48	49	51	52	54	55	57
	24.0	43	44	46	47	48	50	51	52
	24.5		41	42	43	45	46	47	48
	25.0				40	41	42	43	44


TABLE 1: CS210 LWC - #3 REBAR									
IMPERIAL UNITS									
Base Steel Thickness = 0.0435"									
Area of Steel Deck Included									
# 3 Rebar	Light Weight Concrete = 110 lb/ft ³								
SLAB WEIGHT (psf)	40.6	45.2	49.7	54.3	58.9	63.5	68.1	72.7	
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	16.5	15.9	15.3	14.8	14.3	13.8	13.4	13.0	
MAX. UNSHORED TWO SPAN (ft)	14.6	13.5	12.6	11.7	11.0	10.4	9.8	9.3	
MAX. UNSHORED THREE SPAN (ft)	16.5	15.3	14.3	13.3	12.5	11.8	11.2	10.6	
I _u (in ⁴)	48.1	55.1	62.4	70.4	79.0	88.3	99	110	
I _c (in ⁴)	20.2	22.6	25.1	27.8	30.6	33.7	36.9	40.3	
DEFLECTION PARAMETER (SLDP)	538	611	688	772	862	960	1065	1179	
DEFLECTION PARAMETER (SWDP)	0.643	0.625	0.608	0.589	0.569	0.548	0.527	0.506	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	213	227	240	253	267	280	294	307
	14.5	197	209	221	234	246	258	271	283
	15.0	182	193	204	216	227	238	249	261
	15.5	168	179	189	199	210	220	230	241
	16.0	156	165	175	185	194	204	213	223
	16.5	145	154	162	171	180	189	197	206
	17.0	135	143	151	159	167	175	183	191
	17.5	125	133	140	148	155	162	170	177
	18.0	117	124	130	137	144	151	158	164
	18.5	109	115	122	128	134	140	147	153
	19.0	102	108	113	119	125	131	136	142
	19.5	95	100	106	111	116	121	127	132
	20.0	89	94	99	103	108	113	118	123
	20.5	83	88	92	96	101	105	110	114
	21.0	78	82	86	90	94	98	102	106
	21.5	73	77	80	84	88	91	95	99
	22.0	68	72	75	78	82	85	89	92
	22.5	64	67	70	73	76	79	83	86
	23.0	60	63	65	68	71	74	77	80
	23.5	56	59	61	64	66	69	71	74
	24.0	52	55	57	59	62	64	66	69
	24.5	49	51	53	55	57	60	62	64
	25.0	46	48	50	52	53	55	57	59

TABLE 1: CS210 LWC - #3 REBAR									
IMPERIAL UNITS									
Base Steel Thickness = 0.0495"									
Area of Steel Deck Included									
# 3 Rebar	Light Weight Concrete = 110 lb/ft ³								
SLAB WEIGHT (psf)	41.0	45.6	50.1	54.7	59.3	63.9	68.5	73.1	
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	18.7	18.0	17.3	16.8	16.3	15.8	15.4	15.0	
MAX. UNSHORED TWO SPAN (ft)	18.6	17.2	16.0	15.0	14.1	13.3	12.6	11.9	
MAX. UNSHORED THREE SPAN (ft)	21.1	19.6	18.2	17.0	16.0	15.1	14.3	13.6	
I _u (in ⁴)	49.2	56.2	63.7	71.8	80.6	90.1	101	112	
I _c (in ⁴)	21.9	24.5	27.2	30.2	33.4	36.8	40.4	44.2	
DEFLECTION PARAMETER (SLDP)	559	635	716	803	897	998	1108	1226	
DEFLECTION PARAMETER (SWDP)	0.635	0.618	0.600	0.581	0.561	0.541	0.520	0.499	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	241	257	273	289	306	322	338	354
	14.5	223	237	252	267	282	297	312	326
	15.0	206	220	233	247	260	274	288	301
	15.5	191	203	216	229	241	254	266	279
	16.0	177	189	200	212	224	235	247	258
	16.5	165	176	186	197	208	218	229	240
	17.0	154	163	173	183	193	203	213	222
	17.5	143	152	161	170	180	189	198	207
	18.0	134	142	150	159	167	176	184	193
	18.5	125	133	140	148	156	164	172	179
	19.0	117	124	131	138	146	153	160	167
	19.5	109	116	123	129	136	143	149	156
	20.0	102	109	115	121	127	133	139	146
	20.5	96	102	107	113	119	124	130	136
	21.0	90	95	101	106	111	116	122	127
	21.5	84	89	94	99	104	109	114	119
	22.0	79	84	88	93	97	102	106	111
	22.5	74	79	83	87	91	95	99	104
	23.0	70	74	78	81	85	89	93	97
	23.5	66	69	73	76	80	83	87	90
	24.0	62	65	68	71	75	78	81	84
	24.5	58	61	64	67	70	73	76	79
	25.0	54	57	60	63	65	68	71	73

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 1: CS210 LWC - #3 Rebar

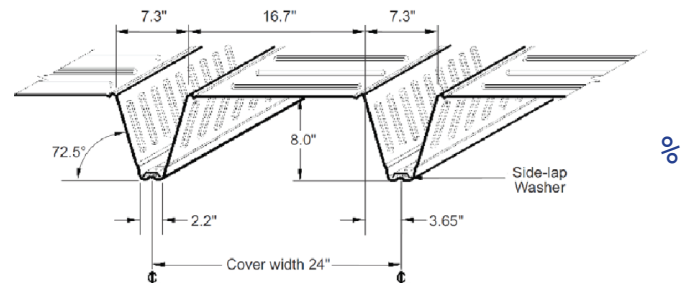



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 1: CS210 LWC - #4 REBAR									
Base Steel Thickness = 0.0375"									
IMPERIAL UNITS									
Area of Steel Deck Included									
# 4 Rebar									
Light Weight Concrete = 110 lb/ft³									
SLAB WEIGHT (psf)	40.3	44.9	49.5	54.1	58.7	63.2	67.8	72.4	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	13.6	13.0	12.5	12.1	11.6	11.3	10.9	10.6	
MAX. UNSHORED TWO SPAN (ft)	11.0	10.2	9.5	8.9	8.3	7.8	7.4	7.0	
MAX. UNSHORED THREE SPAN (ft)	12.5	11.6	10.8	10.1	9.4	8.9	8.4	8.0	
I _u (in⁴)	48.3	55.2	62.6	70.6	79.2	88.6	99	110	
I _c (in⁴)	20.4	22.8	25.3	27.9	30.8	33.8	37.0	40.3	
DEFLECTION PARAMETER (SLDP)	540	614	692	775	865	963	1067	1181	
DEFLECTION PARAMETER (SWDP)	0.637	0.620	0.603	0.584	0.565	0.545	0.524	0.503	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	225	238	251	264	277	290	304	317
	14.5	207	219	231	243	255	268	280	292
	15.0	192	203	214	225	236	247	258	269
	15.5	178	188	198	208	218	228	238	248
	16.0	165	174	183	193	202	211	221	230
	16.5	153	162	170	179	187	196	204	213
	17.0	143	150	158	166	174	182	190	197
	17.5	133	140	147	154	162	169	176	183
	18.0	124	130	137	144	150	157	164	170
	18.5	116	122	128	134	140	146	152	158
	19.0	108	114	119	125	130	136	142	147
	19.5	101	106	111	116	122	127	132	137
	20.0	95	99	104	109	113	118	123	128
	20.5	89	93	97	102	106	110	114	119
	21.0	83	87	91	95	99	103	107	111
	21.5	78	81	85	89	92	96	99	103
	22.0	73	76	80	83	86	89	93	96
	22.5	68	71	74	77	80	83	86	89
	23.0	64	67	70	72	75	78	80	83
	23.5	60	63	65	68	70	72	75	77
	24.0	56	59	61	63	65	68	70	72
	24.5	53	55	57	59	61	63	65	67
	25.0	50	51	53	55	57	59	60	62
	25.5	47	48	50	51	53	54	56	58
	26.0	44	45	46	48	49	51	52	53
	26.5	41	42	43	44	46	47	48	49
	27.0			40	41	42	43	44	45
	27.5					40	41	42	
	28.0								

TABLE 1: CS210 LWC - #4 REBAR									
Base Steel Thickness = 0.0495"									
IMPERIAL UNITS									
Area of Steel Deck Included									
# 4 Rebar									
Light Weight Concrete = 110 lb/ft³									
SLAB WEIGHT (psf)	41.1	45.7	50.3	54.9	59.4	64.0	68.6	73.2	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	18.7	18.0	17.3	16.8	16.2	15.8	15.3	14.9	
MAX. UNSHORED TWO SPAN (ft)	18.5	17.2	16.0	15.0	14.1	13.3	12.6	11.9	
MAX. UNSHORED THREE SPAN (ft)	21.1	19.5	18.2	17.0	16.0	15.1	14.3	13.5	
I _u (in⁴)	50.2	57.4	65.1	73.4	82.3	92.0	103	114	
I _c (in⁴)	23.6	26.4	29.4	32.6	36.1	39.8	43.7	47.9	
DEFLECTION PARAMETER (SLDP)	581	659	744	834	932	1037	1150	1273	
DEFLECTION PARAMETER (SWDP)	0.625	0.607	0.589	0.570	0.551	0.531	0.510	0.490	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	281	299	318	336	355	374	392	411
	14.5	259	277	294	311	328	345	362	379
	15.0	240	256	272	288	304	319	335	351
	15.5	223	238	252	267	281	296	311	325
	16.0	208	221	234	248	261	275	288	302
	16.5	193	206	218	231	243	256	268	280
	17.0	180	192	203	215	226	238	249	261
	17.5	168	179	190	200	211	222	233	243
	18.0	158	167	177	187	197	207	217	227
	18.5	147	157	166	175	184	193	203	212
	19.0	138	147	155	164	172	181	189	198
	19.5	130	138	146	153	161	169	177	185
	20.0	122	129	136	144	151	159	166	173
	20.5	114	121	128	135	142	149	155	162
	21.0	108	114	120	127	133	139	146	152
	21.5	101	107	113	119	125	131	137	143
	22.0	95	101	106	112	117	123	128	134
	22.5	90	95	100	105	110	115	120	125
	23.0	85	89	94	99	103	108	113	118
	23.5	80	84	88	93	97	102	106	110
	24.0	75	79	83	87	91	95	100	104
	24.5	71	75	78	82	86	90	93	97
	25.0	67	70	74	77	81	84	88	91
	25.5	63	66	69	73	76	79	82	86
	26.0	59	62	65	68	71	74	77	80
	26.5	56	59	62	64	67	70	72	75
	27.0	53	55	58	60	63	65	68	70
	27.5	50	52	54	57	59	61	64	66
	28.0	47	49	51	53	55	57	59	62

TABLE 1: CS210 LWC - #4 REBAR									
Base Steel Thickness = 0.0435"					IMPERIAL UNITS				
# 4 Rebar					Area of Steel Deck Included				
					Light Weight Concrete = 110 lb/ft³				
SLAB WEIGHT (psf)	40.7	45.3	49.9	54.5	59.0	63.6	68.2	72.8	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	16.5	15.9	15.3	14.8	14.3	13.8	13.4	13.0	
MAX. UNSHORED TWO SPAN (ft)	14.5	13.5	12.5	11.7	11.0	10.4	9.8	9.3	
MAX. UNSHORED THREE SPAN (ft)	16.5	15.3	14.2	13.3	12.5	11.8	11.2	10.6	
I _u (in⁴)	49.2	56.3	63.8	71.9	80.7	90.2	101	112	
I _c (in⁴)	22.0	24.6	27.3	30.3	33.4	36.8	40.4	44.1	
DEFLECTION PARAMETER (SLDP)	560	636	717	804	898	999	1109	1227	
DEFLECTION PARAMETER (SWDP)	0.631	0.614	0.596	0.577	0.558	0.538	0.517	0.497	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	253	269	285	301	317	333	349	365
	14.5	234	248	263	278	292	307	322	336
	15.0	216	230	243	257	270	284	297	311
	15.5	201	213	225	238	250	263	275	287
	16.0	187	198	209	221	232	244	255	266
	16.5	174	184	195	205	216	226	237	247
	17.0	162	171	181	191	201	210	220	230
	17.5	151	160	169	178	187	196	205	214
	18.0	141	149	158	166	174	182	191	199
	18.5	132	139	147	155	162	170	178	185
	19.0	123	130	138	145	152	159	166	173
	19.5	116	122	129	135	142	148	155	161
	20.0	108	114	120	127	133	139	145	151
	20.5	102	107	113	118	124	130	135	141
	21.0	95	101	106	111	116	121	127	132
	21.5	90	94	99	104	109	114	118	123
	22.0	84	89	93	98	102	106	111	115
	22.5	79	83	87	91	95	100	104	108
	23.0	74	78	82	86	89	93	97	101
	23.5	70	74	77	80	84	87	91	94
	24.0	66	69	72	75	79	82	85	88
	24.5	62	65	68	71	74	76	79	82
	25.0	58	61	64	66	69	72	74	77
	25.5	55	57	60	62	65	67	69	72
	26.0	52	54	56	58	60	63	65	67
	26.5	49	51	53	55	56	58	60	62
27.0	46	47	49	51	53	55	56	58	
27.5	43	45	46	48	49	51	52	54	
28.0	40	42	43	45	46	47	49	50	



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 1: CS210 LWC - #5 REBAR									
Base Steel Thickness = 0.0375"									
IMPERIAL UNITS									
Area of Steel Deck Included									
# 5 Rebar									
Light Weight Concrete = 110 lb/ft³									
SLAB WEIGHT (psf)	40.5	45.1	49.7	54.3	58.8	63.4	68.0	72.6	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	14.1	13.5	12.9	12.4	12.0	11.6	11.3	11.0	
MAX. UNSHORED TWO SPAN (ft)	11.0	10.1	9.4	8.8	8.3	7.8	7.4	7.0	
MAX. UNSHORED THREE SPAN (ft)	12.5	11.5	10.7	10.0	9.4	8.9	8.4	8.0	
I _u (in⁴)	49.5	56.7	64.3	72.5	81.4	90.9	101	113	
I _c (in⁴)	22.6	25.3	28.1	31.1	34.3	37.7	41.3	45.1	
DEFLECTION PARAMETER (SLDP)	568	645	727	815	910	1012	1122	1241	
DEFLECTION PARAMETER (SWDP)	0.624	0.607	0.589	0.571	0.552	0.532	0.512	0.492	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	285	302	319	336	353	370	387	404
	14.5	263	279	294	310	326	341	357	373
	15.0	244	258	273	287	301	316	330	345
	15.5	227	240	253	266	280	293	306	319
	16.0	211	223	235	247	260	272	284	296
	16.5	196	208	219	230	241	253	264	275
	17.0	183	194	204	215	225	235	246	256
	17.5	171	181	190	200	210	219	229	239
	18.0	160	169	178	187	196	205	214	223
	18.5	150	158	167	175	183	191	200	208
	19.0	141	148	156	164	171	179	187	194
	19.5	132	139	146	153	160	167	175	182
	20.0	124	131	137	144	150	157	163	170
	20.5	117	123	129	135	141	147	153	159
	21.0	110	115	121	127	132	138	143	149
	21.5	103	108	114	119	124	129	135	140
	22.0	97	102	107	112	117	121	126	131
	22.5	92	96	101	105	109	114	118	123
	23.0	86	90	95	99	103	107	111	115
	23.5	81	85	89	93	97	100	104	108
	24.0	77	80	84	87	91	94	98	101
	24.5	72	76	79	82	85	89	92	95
	25.0	68	71	74	77	80	83	86	89
	25.5	65	67	70	73	75	78	81	84
	26.0	61	63	66	68	71	73	76	78
	26.5	58	60	62	64	67	69	71	73
	27.0	54	56	58	60	63	65	67	69
	27.5	51	53	55	57	59	61	62	64
	28.0	48	50	52	53	55	57	58	60

TABLE 1: CS210 LWC - #5 REBAR									
Base Steel Thickness = 0.0495"									
IMPERIAL UNITS									
Area of Steel Deck Included									
# 5 Rebar									
Light Weight Concrete = 110 lb/ft³									
SLAB WEIGHT (psf)	41.3	45.9	50.5	55.1	59.6	64.2	68.8	73.4	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	19.1	18.5	17.8	17.2	16.7	16.2	15.8	15.4	
MAX. UNSHORED TWO SPAN (ft)	18.5	17.1	16.0	14.9	14.0	13.2	12.5	11.9	
MAX. UNSHORED THREE SPAN (ft)	21.0	19.5	18.1	17.0	16.0	15.1	14.2	13.5	
I _u (in⁴)	51.4	58.9	66.8	75.3	84.4	94.3	105	117	
I _c (in⁴)	25.7	28.8	32.1	35.6	39.4	43.5	47.8	52.3	
DEFLECTION PARAMETER (SLDP)	607	689	778	872	974	1084	1203	1330	
DEFLECTION PARAMETER (SWDP)	0.613	0.595	0.577	0.558	0.539	0.519	0.499	0.479	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	343	366	389	411	434	457	480	502
	14.5	318	339	360	381	402	423	444	465
	15.0	295	314	334	353	372	392	411	431
	15.5	274	292	310	328	346	364	382	400
	16.0	255	272	289	305	322	338	355	372
	16.5	238	254	269	285	300	315	331	346
	17.0	223	237	251	266	280	294	309	323
	17.5	208	222	235	248	262	275	288	302
	18.0	195	208	220	233	245	257	270	282
	18.5	183	195	206	218	229	241	253	264
	19.0	172	183	194	204	215	226	237	248
	19.5	162	172	182	192	202	212	222	232
	20.0	152	162	171	181	190	199	209	218
	20.5	143	152	161	170	179	187	196	205
	21.0	135	143	152	160	168	176	184	193
	21.5	128	135	143	151	158	166	174	181
	22.0	121	128	135	142	149	156	164	171
	22.5	114	121	127	134	141	147	154	161
	23.0	108	114	120	126	133	139	145	151
	23.5	102	108	113	119	125	131	137	143
	24.0	96	102	107	113	118	124	129	135
	24.5	91	96	101	107	112	117	122	127
	25.0	86	91	96	101	105	110	115	120
	25.5	82	86	91	95	100	104	109	113
	26.0	77	82	86	90	94	98	102	107
	26.5	73	77	81	85	89	93	97	101
	27.0	70	73	77	80	84	88	91	95
	27.5	66	69	73	76	79	83	86	89
	28.0	63	66	69	72	75	78	81	84

TABLE 1: CS210 LWC - #5 REBAR					IMPERIAL UNITS				
Base Steel Thickness = 0.0435"					Area of Steel Deck Included				
# 5 Rebar					Light Weight Concrete = 110 lb/ft³				
SLAB WEIGHT (psf)	40.9	45.5	50.1	54.7	59.2	63.8	68.4	73.0	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	16.9	16.3	15.7	15.2	14.7	14.2	13.8	13.4	
MAX. UNSHORED TWO SPAN (ft)	14.5	13.4	12.5	11.7	11.0	10.4	9.8	9.3	
MAX. UNSHORED THREE SPAN (ft)	16.5	15.3	14.2	13.3	12.5	11.8	11.1	10.6	
I _u (in⁴)	50.4	57.7	65.5	73.8	82.8	92.6	103	115	
I _c (in⁴)	24.1	27.0	30.1	33.4	36.9	40.6	44.6	48.7	
DEFLECTION PARAMETER (SLDP)	587	666	752	843	942	1048	1162	1285	
DEFLECTION PARAMETER (SWDP)	0.619	0.601	0.583	0.565	0.545	0.526	0.506	0.486	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	314	334	354	374	394	414	434	454
	14.5	291	309	328	346	364	383	401	419
	15.0	270	287	304	321	337	354	371	388
	15.5	251	266	282	298	313	329	344	360
	16.0	233	248	262	277	291	306	320	335
	16.5	218	231	244	258	271	285	298	311
	17.0	203	216	228	240	253	265	278	290
	17.5	190	202	213	225	236	248	259	271
	18.0	178	189	199	210	221	231	242	253
	18.5	167	177	187	197	207	217	227	236
	19.0	157	166	175	184	194	203	212	221
	19.5	147	156	164	173	182	190	199	207
	20.0	138	146	154	162	170	178	186	194
	20.5	130	138	145	153	160	168	175	182
	21.0	123	130	137	143	150	157	164	171
	21.5	116	122	129	135	141	148	154	161
	22.0	109	115	121	127	133	139	145	151
	22.5	103	108	114	120	125	131	137	142
	23.0	97	102	108	113	118	123	128	134
	23.5	92	97	101	106	111	116	121	126
	24.0	87	91	96	100	105	109	114	118
	24.5	82	86	90	95	99	103	107	111
	25.0	77	81	85	89	93	97	101	105
	25.5	73	77	81	84	88	91	95	99
26.0	69	73	76	79	83	86	89	93	
26.5	66	69	72	75	78	81	84	87	
27.0	62	65	68	71	73	76	79	82	
27.5	59	61	64	67	69	72	74	77	
28.0	56	58	60	63	65	68	70	72	



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

	IMPERIAL UNITS									
	Area of Steel Deck Included									
# 6 Rebar	Light Weight Concrete = 110 lb/ft ³									
SLAB WEIGHT (psf)	40.7	45.3	49.9	54.5	59.1	63.7	68.2	72.8		
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	14.0	13.4	12.9	12.4	12.0	11.6	11.3	11.0		
MAX. UNSHORED TWO SPAN (ft)	10.9	10.1	9.4	8.8	8.3	7.8	7.4	7.0		
MAX. UNSHORED THREE SPAN (ft)	12.4	11.5	10.7	10.0	9.4	8.9	8.4	8.0		
I _u (in ⁴)	51.0	58.4	66.3	74.7	83.9	93.7	104	116		
I _c (in ⁴)	25.1	28.1	31.3	34.7	38.4	42.2	46.3	50.6		
DEFLECTION PARAMETER (SLDP)	599	681	768	861	962	1069	1185	1310		
DEFLECTION PARAMETER (SWDP)	0.610	0.592	0.574	0.556	0.537	0.518	0.499	0.479		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	14.0	345	366	387	408	429	449	470	491	
	14.5	320	339	358	377	397	416	435	454	
	15.0	297	314	332	350	368	385	403	421	
	15.5	276	292	309	325	342	358	374	391	
	16.0	257	272	287	303	318	333	348	363	
	16.5	240	254	268	282	296	310	324	338	
	17.0	224	237	250	263	276	289	303	316	
	17.5	210	222	234	246	258	270	283	295	
	18.0	197	208	219	231	242	253	264	276	
	18.5	185	195	206	216	227	237	247	258	
	19.0	173	183	193	203	212	222	232	242	
	19.5	163	172	181	190	199	209	218	227	
	20.0	154	162	170	179	187	196	204	213	
	20.5	145	153	160	168	176	184	192	200	
	21.0	136	144	151	159	166	173	181	188	
	21.5	129	136	142	149	156	163	170	177	
	22.0	122	128	134	141	147	154	160	166	
	22.5	115	121	127	133	139	145	151	157	
	23.0	109	114	120	125	131	136	142	148	
	23.5	103	108	113	118	124	129	134	139	
	24.0	97	102	107	112	117	121	126	131	
	24.5	92	97	101	106	110	115	119	124	
	25.0	87	91	96	100	104	108	112	117	
	25.5	83	87	90	94	98	102	106	110	
	26.0	78	82	86	89	93	96	100	104	
	26.5	74	78	81	84	88	91	94	98	
	27.0	70	74	77	80	83	86	89	92	
	27.5	67	70	73	75	78	81	84	87	
	28.0	63	66	69	71	74	77	79	82	
	28.5	60	63	65	67	70	72	75	77	
	29.0	57	59	61	64	66	68	70	73	
	29.5	54	56	58	60	62	64	66	68	
	30.0	51	53	55	57	59	61	62	64	

	IMPERIAL UNITS									
	Area of Steel Deck Included									
# 6 Rebar	Light Weight Concrete = 110 lb/ft ³									
SLAB WEIGHT (psf)	41.1	45.7	50.3	54.9	59.5	64.1	68.6	73.2		
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	16.9	16.3	15.7	15.2	14.7	14.2	13.8	13.4		
MAX. UNSHORED TWO SPAN (ft)	14.5	13.4	12.5	11.7	11.0	10.3	9.8	9.3		
MAX. UNSHORED THREE SPAN (ft)	16.4	15.2	14.2	13.3	12.5	11.8	11.1	10.6		
I _u (in ⁴)	51.9	59.4	67.4	76.0	85.3	95.3	106	118		
I _c (in ⁴)	26.6	29.8	33.2	36.9	40.8	45.0	49.4	54.1		
DEFLECTION PARAMETER (SLDP)	617	701	792	888	992	1104	1224	1353		
DEFLECTION PARAMETER (SWDP)	0.605	0.587	0.569	0.550	0.532	0.512	0.493	0.474		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	14.0	374	398	422	446	469	493	517	541	
	14.5	347	369	391	413	435	457	479	500	
	15.0	322	342	363	383	403	423	444	464	
	15.5	300	318	337	356	375	394	412	431	
	16.0	279	297	314	332	349	366	384	401	
	16.5	261	277	293	309	325	342	358	374	
	17.0	244	259	274	289	304	319	334	349	
	17.5	228	242	256	270	284	298	312	326	
	18.0	214	227	240	253	266	279	292	305	
	18.5	201	213	225	238	250	262	274	286	
	19.0	189	200	212	223	234	246	257	269	
	19.5	178	189	199	210	220	231	242	252	
	20.0	168	178	187	197	207	217	227	237	
	20.5	158	167	177	186	195	204	214	223	
	21.0	149	158	167	175	184	193	201	210	
	21.5	141	149	157	165	173	181	190	198	
	22.0	133	141	148	156	164	171	179	186	
	22.5	126	133	140	147	154	162	169	176	
	23.0	119	126	133	139	146	153	159	166	
	23.5	113	119	125	132	138	144	150	157	
	24.0	107	113	119	124	130	136	142	148	
	24.5	101	107	112	118	123	129	134	140	
	25.0	96	101	106	111	117	122	127	132	
	25.5	91	96	101	106	110	115	120	125	
	26.0	87	91	96	100	104	109	113	118	
	26.5	82	86	91	95	99	103	107	111	
	27.0	78	82	86	90	94	97	101	105	
	27.5	74	78	81	85	89	92	96	99	
	28.0	70	74	77	81	84	87	91	94	
	28.5	67	70	73	76	79	83	86	89	
	29.0	64	66	69	72	75	78	81	84	
	29.5	60	63	66	68	71	74	77	79	
	30.0	57	60	62	65	67	70	72	75	

TABLE 1: CS210 LWC - #6 REBAR					IMPERIAL UNITS				
Base Steel Thickness = 0.0495"					Area of Steel Deck Included				
# 6 Rebar					Light Weight Concrete = 110 lb/ft³				
SLAB WEIGHT (psf)	41.5	46.1	50.7	55.3	59.9	64.4	69.0	73.6	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	19.0	18.4	17.8	17.2	16.7	16.2	15.8	15.4	
MAX. UNSHORED TWO SPAN (ft)	18.4	17.1	15.9	14.9	14.0	13.2	12.5	11.9	
MAX. UNSHORED THREE SPAN (ft)	21.0	19.4	18.1	16.9	15.9	15.0	14.2	13.5	
I _u (in⁴)	52.8	60.5	68.7	77.4	86.9	97.0	108	120	
I _c (in⁴)	28.0	31.4	35.1	39.1	43.3	47.7	52.5	57.5	
DEFLECTION PARAMETER (SLDP)	636	723	817	916	1024	1139	1263	1397	
DEFLECTION PARAMETER (SWDP)	0.600	0.581	0.563	0.545	0.526	0.507	0.487	0.468	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	402	429	456	482	509	536	562	589
	14.5	373	398	422	447	471	496	521	545
	15.0	347	369	392	415	438	460	483	506
	15.5	323	344	365	386	407	428	449	470
	16.0	301	320	340	360	379	399	418	438
	16.5	281	299	317	336	354	372	390	408
	17.0	263	280	297	314	331	348	365	382
	17.5	246	262	278	294	310	325	341	357
	18.0	231	246	261	275	290	305	320	334
	18.5	217	231	245	259	272	286	300	314
	19.0	204	217	230	243	256	269	282	294
	19.5	192	204	216	229	241	253	265	277
	20.0	181	193	204	215	227	238	249	260
	20.5	171	182	192	203	213	224	235	245
	21.0	162	171	181	191	201	211	221	231
	21.5	153	162	171	181	190	199	209	218
	22.0	144	153	162	171	179	188	197	206
	22.5	137	145	153	161	170	178	186	194
	23.0	130	137	145	153	160	168	176	183
	23.5	123	130	137	144	152	159	166	173
24.0	116	123	130	137	144	150	157	164	
24.5	110	117	123	130	136	142	149	155	
25.0	105	111	117	123	129	135	141	147	
25.5	100	105	111	116	122	128	133	139	
26.0	95	100	105	110	116	121	126	132	
26.5	90	95	100	105	110	115	120	125	
27.0	85	90	95	99	104	109	113	118	
27.5	81	86	90	94	99	103	107	112	
28.0	77	81	85	89	94	98	102	106	
28.5	73	77	81	85	89	93	96	100	
29.0	70	73	77	81	84	88	91	95	
29.5	67	70	73	77	80	83	87	90	
30.0	63	66	70	73	76	79	82	85	



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 1: CS210 LWC - #7 REBAR										
Base Steel Thickness = 0.0375"										
# 7 Rebar										
IMPERIAL UNITS										
Area of Steel Deck Included										
Light Weight Concrete = 110 lb/ft³										
SLAB WEIGHT (psf)	41.0	45.6	50.2	54.8	59.3	63.9	68.5	73.1		
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	14.0	13.4	12.9	12.4	12.0	11.6	11.3	11.0		
MAX. UNSHORED TWO SPAN (ft)	10.9	10.1	9.4	8.8	8.3	7.8	7.4	7.0		
MAX. UNSHORED THREE SPAN (ft)	12.4	11.5	10.7	10.0	9.4	8.8	8.4	7.9		
I _u (in⁴)	52.6	60.3	68.5	77.2	86.7	96.8	108	120		
I _c (in⁴)	27.9	31.2	34.9	38.7	42.9	47.2	51.8	56.7		
DEFLECTION PARAMETER (SLDP)	633	720	813	912	1019	1133	1256	1388		
DEFLECTION PARAMETER (SWDP)	0.595	0.577	0.559	0.541	0.522	0.504	0.485	0.466		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	16.0	310	329	348	366	385	404	422	441	
	16.5	290	307	325	342	359	377	394	412	
	17.0	271	288	304	320	336	352	368	385	
	17.5	254	269	285	300	315	330	345	360	
	18.0	239	253	267	281	295	309	323	337	
	18.5	224	238	251	264	277	290	303	316	
	19.0	211	223	236	248	260	272	285	297	
	19.5	199	210	222	233	245	256	268	279	
	20.0	188	198	209	220	230	241	252	263	
	20.5	177	187	197	207	217	227	237	247	
	21.0	167	177	186	195	205	214	224	233	
	21.5	158	167	176	185	193	202	211	220	
	22.0	150	158	166	174	183	191	199	208	
	22.5	142	150	157	165	173	180	188	196	
	23.0	134	142	149	156	163	171	178	185	
	23.5	127	134	141	148	155	161	168	175	
	24.0	121	127	134	140	146	153	159	166	
	24.5	115	121	127	133	139	145	151	157	
	25.0	109	115	120	126	131	137	143	148	
	25.5	104	109	114	119	125	130	135	140	
	26.0	98	103	108	113	118	123	128	133	
	26.5	94	98	103	107	112	117	121	126	
	27.0	89	93	98	102	106	111	115	119	
	27.5	84.d	89	93	97	101	105	109	113	
	28.0	80.d	84	88	92	96	100	103	107	
	28.5	76.d	80	84	87	91	94	98	101	
	29.0	72.d	76	80	83	86	90	93	96	
	29.5	68.d	73	76	79	82	85	88	91	
	30.0	65.d	69	72	75	78	81	83	86	
	30.5	62.d	66	68	71	74	76	79	82	
	31.0	59.d	63	65	67	70	72	75	77	
	31.5	56.d	60	62	64	66	69	71	73	
	32.0	54.d	57	59	61	63	65	67	69	
	32.5	51.d	54	56	58	60	62	63	65	
	33.0	49.d	51	53	55	56	58	60	62	

TABLE 1: CS210 LWC - #7 REBAR										
Base Steel Thickness = 0.0435"										
# 7 Rebar										
IMPERIAL UNITS										
Area of Steel Deck Included										
Light Weight Concrete = 110 lb/ft³										
SLAB WEIGHT (psf)	41.4	46.0	50.6	55.2	59.7	64.3	68.9	73.5		
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	16.9	16.3	15.7	15.2	14.7	14.2	13.8	13.4		
MAX. UNSHORED TWO SPAN (ft)	14.4	13.3	12.4	11.6	10.9	10.3	9.8	9.3		
MAX. UNSHORED THREE SPAN (ft)	16.4	15.2	14.1	13.2	12.4	11.7	11.1	10.5		
I _u (in⁴)	53.4	61.3	69.6	78.5	88.1	98.4	110	122		
I _c (in⁴)	29.2	32.8	36.6	40.8	45.2	49.8	54.8	60.0		
DEFLECTION PARAMETER (SLDP)	650	740	836	938	1048	1166	1293	1429		
DEFLECTION PARAMETER (SWDP)	0.591	0.572	0.554	0.536	0.517	0.499	0.480	0.461		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	16.0	332	353	374	395	416	437	458	479	
	16.5	310	330	349	369	388	408	427	447	
	17.0	291	309	327	345	363	381	399	418	
	17.5	272	289	306	323	340	357	374	391	
	18.0	256	272	287	303	319	335	351	367	
	18.5	241	255	270	285	300	314	329	344	
	19.0	226	240	254	268	282	296	309	323	
	19.5	213	226	239	252	265	278	291	304	
	20.0	201	213	226	238	250	262	274	286	
	20.5	190	202	213	224	236	247	259	270	
	21.0	180	190	201	212	223	233	244	255	
	21.5	170	180	190	200	210	220	230	240	
	22.0	161	170	180	189	199	208	218	227	
	22.5	153	161	170	179	188	197	206	215	
	23.0	145	153	161	170	178	186	195	203	
	23.5	137	145	153	161	169	177	184	192	
	24.0	130	138	145	152	160	167	175	182	
	24.5	123.d	131	138	145	152	159	166	172	
	25.0	116.d	124	131	137	144	150	157	163	
	25.5	109.d	118	124	130	137	143	149	155	
	26.0	103.d	112	118	124	130	135	141	147	
	26.5	97.d	107	112	118	123	129	134	139	
	27.0	92.d	102	107	112	117	122	127	132	
	27.5	87.d	97	101	106	111	116	121	126	
	28.0	82.d	92	97	101	106	110	115	119	
	28.5	78.d	88	92	96	100	105	109	113	
	29.0	74.d	83	87	91	95	99	103	107	
	29.5	70.d	79	83	87	91	94	98	102	
	30.0	67.d	76	79	83	86	90	93	97	
	30.5	64.d	72	75	79	82	85	88	92	
	31.0	61.d	69	72	75	78	81	84	87	
	31.5	58.d	65	68	71	74	77	80	83	
	32.0	55.d	62	65	68	70	73	76	78	
	32.5	53.d	59	62	64	67	69	72	74	
	33.0	50.d	57	59	61	63	66	68	70	

TABLE 1: CS210 LWC - #7 REBAR					IMPERIAL UNITS				
Base Steel Thickness = 0.0495"					Area of Steel Deck Included				
# 7 Rebar					Light Weight Concrete = 110 lb/ft³				
SLAB WEIGHT (psf)	41.8	46.4	51.0	55.6	60.1	64.7	69.3	73.9	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	19.0	18.4	17.8	17.2	16.7	16.2	15.7	15.3	
MAX. UNSHORED TWO SPAN (ft)	18.4	17.0	15.9	14.9	14.0	13.2	12.5	11.8	
MAX. UNSHORED THREE SPAN (ft)	20.9	19.4	18.0	16.9	15.9	15.0	14.2	13.5	
I _u (in⁴)	54.4	62.4	70.8	79.9	89.6	100.1	111	124	
I _c (in⁴)	30.6	34.4	38.5	42.8	47.5	52.5	57.7	63.3	
DEFLECTION PARAMETER (SLDP)	669	761	860	965	1078	1200	1331	1471	
DEFLECTION PARAMETER (SWDP)	0.586	0.567	0.549	0.531	0.512	0.493	0.474	0.456	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	16.0	353	376	399	422	445	469	492	515
	16.5	330	352	373	395	416	438	459	481
	17.0	309	329	349	369	389	410	430	450
	17.5	290	309	328	346	365	384	402	421
	18.0	272	290	307	325	343	360	378	395
	18.5	256	273	289	305	322	338	355	371
	19.0	241	257	272	287	303	318	334	349
	19.5	227	242	256	271	285	300	314	328
	20.0	215	228	242	255	269	282	296	309
	20.5	203	216	228	241	254	266	279	292
	21.0	192	204	216	228	240	252	264	276
	21.5	182	193	204	215	227	238	249	260
	22.0	172	183	193	204	214	225	236	246
	22.5	163	173	183	193	203	213	223	233
	23.0	153.d	164	174	183	192	202	211	220
	23.5	143.d	156	165	173	182	191	200	209
	24.0	134.d	148	156	165	173	181	190	198
	24.5	126.d	140	148	156	164	172	180	188
	25.0	119.d	134	141	148	156	163	171	178
	25.5	112.d	127	134	141	148	155	162	169
	26.0	106.d	120.d	127	134	141	147	154	160
	26.5	100.d	114.d	121	128	134	140	146	152
	27.0	94.d	107.d	115	121	127	133	139	145
	27.5	89.d	102.d	110	115	121	127	132	138
	28.0	85.d	96.d	105	110	115	120	126	131
	28.5	80.d	91.d	100	105	110	114	119	124
	29.0	76.d	87.d	95	100	104	109	114	118
	29.5	72.d	82.d	90	95	99	104	108	112
30.0	69.d	78.d	86	90	94	99	103	107	
30.5	65.d	75.d	82	86	90	94	98	101	
31.0	62.d	71.d	78	82	86	89	93	96	
31.5	59.d	68.d	75	78	81	85	88	92	
32.0	57.d	65.d	71	74	78	81	84	87	
32.5	54.d	62.d	68	71	74	77	80	83	
33.0	52.d	59.d	65	67	70	73	76	79	



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026


TABLE 1: CS210 LWC - #8 REBAR										
Base Steel Thickness = 0.0375"										
# 8 Rebar										
IMPERIAL UNITS										
Area of Steel Deck Included										
Light Weight Concrete = 110 lb/ft³										
SLAB WEIGHT (psf)	41.3	45.9	50.5	55.1	59.7	64.2	68.8	73.4		
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	14.0	13.4	12.9	12.4	12.0	11.6	11.3	10.9		
MAX. UNSHORED TWO SPAN (ft)	10.8	10.0	9.4	8.8	8.2	7.8	7.3	7.0		
MAX. UNSHORED THREE SPAN (ft)	12.3	11.4	10.6	10.0	9.4	8.8	8.4	7.9		
I _u (in⁴)	54.2	62.3	70.8	79.9	89.7	100.2	112	124		
I _c (in⁴)	30.7	34.5	38.6	43.0	47.6	52.6	57.8	63.3		
DEFLECTION PARAMETER (SLDP)	668	762	861	967	1080	1202	1332	1472		
DEFLECTION PARAMETER (SWDP)	0.581	0.562	0.544	0.525	0.507	0.489	0.470	0.452		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	16.0	370	393	416	438	461	484	506	529	
	16.5	346	367	389	410	431	452	473	494	
	17.0	324	344	364	384	403	423	443	462	
	17.5	304	323	341	360	378	396	415	433	
	18.0	286	303	320	338	355	372	389	407	
	18.5	269	285	301	317	334	350	366	382	
	19.0	253	269	284	299	314	329	344	359	
	19.5	239	253	267	282	296	310	324	338	
	20.0	226	239	252	266	279	292	306	319	
	20.5	213	226	238	251	263	276	288	301	
	21.0	200.d	214	225	237	249	261	272	284	
	21.5	187.d	202	213	224	235	246	257	269	
	22.0	174.d	192	202	212	223	233	244	254	
	22.5	163.d	182	191	201	211	221	231	240	
	23.0	153.d	172	182	191	200	209	218	228	
	23.5	143.d	163.d	172	181	190	198	207	216	
	24.0	134.d	153.d	164	172	180	188	196	205	
	24.5	126.d	144.d	156	163	171	179	186	194	
	25.0	119.d	135.d	148	155	162	170	177	184	
	25.5	112.d	128.d	141	148	154	161	168	175	
	26.0	106.d	120.d	134	140	147	153	160	166	
	26.5	100.d	114.d	127	134	140	146	152	158	
	27.0	94.d	108.d	121	127	133	139	144	150	
	27.5	89.d	102.d	115.d	121	126	132	137	143	
	28.0	85.d	96.d	109.d	115	120	126	131	136	
	28.5	80.d	91.d	103.d	110	115	119	124	129	
	29.0	76.d	87.d	98.d	105	109	114	118	123	
	29.5	72.d	82.d	93.d	100	104	108	113	117	
	30.0	69.d	78.d	89.d	95	99	103	107	111	
	30.5	65.d	75.d	84.d	91	94	98	102	106	
	31.0	62.d	71.d	80.d	86	90	94	97	101	
	31.5	59.d	68.d	77.d	82	86	89	92	96	
	32.0	57.d	65.d	73.d	79	82	85	88	91	
	32.5	54.d	62.d	70.d	75	78	81	84	87	
	33.0	52.d	59.d	67.d	71	74	77	80	82	

TABLE 1: CS210 LWC - #8 REBAR										
Base Steel Thickness = 0.0435"										
# 8 Rebar										
IMPERIAL UNITS										
Area of Steel Deck Included										
Light Weight Concrete = 110 lb/ft³										
SLAB WEIGHT (psf)	41.7	46.3	50.9	55.5	60.1	64.6	69.2	73.8		
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	16.8	16.2	15.7	15.2	14.6	14.2	13.8	13.4		
MAX. UNSHORED TWO SPAN (ft)	14.3	13.3	12.4	11.6	10.9	10.3	9.7	9.2		
MAX. UNSHORED THREE SPAN (ft)	16.3	15.1	14.1	13.2	12.4	11.7	11.1	10.5		
I _u (in⁴)	55.1	63.3	71.9	81.2	91.1	101.8	113	126		
I _c (in⁴)	32.0	36.0	40.3	44.9	49.8	55.0	60.6	66.4		
DEFLECTION PARAMETER (SLDP)	685	781	883	992	1108	1234	1368	1512		
DEFLECTION PARAMETER (SWDP)	0.578	0.558	0.540	0.521	0.503	0.484	0.466	0.448		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	16.0	391	416	441	466	491	516	541	566	
	16.5	366	389	413	436	459	482	506	529	
	17.0	343	365	386	408	430	452	473	495	
	17.5	322	342	362	383	403	423	444	464	
	18.0	303	322	341	360	379	398	417	436	
	18.5	285	303	320	338	356	374	392	409	
	19.0	268	285	302	318	335	352	369	385	
	19.5	253	269	285	300	316	332	347	363	
	20.0	238.d	254	269	283	298	313	328	342	
	20.5	221.d	240	254	268	282	295	309	323	
	21.0	205.d	227	240	253	266	279	292	305	
	21.5	191.d	215	227	240	252	264	276	289	
	22.0	179.d	204.d	215	227	239	250	262	273	
	22.5	167.d	190.d	204	215	226	237	248	259	
	23.0	156.d	178.d	194	204	214	225	235	245	
	23.5	147.d	167.d	184	194	203	213	223	233	
	24.0	138.d	157.d	175	184	193	202	212	221	
	24.5	129.d	147.d	166	175	184	192	201	210	
	25.0	122.d	139.d	157.d	166	175	183	191	199	
	25.5	115.d	131.d	148.d	158	166	174	182	189	
	26.0	108.d	123.d	140.d	151	158	165	173	180	
	26.5	102.d	117.d	132.d	143	150	157	164	171	
	27.0	97.d	110.d	125.d	137	143	150	156	163	
	27.5	92.d	104.d	118.d	130	136	143	149	155	
	28.0	87.d	99.d	112.d	124	130	136	142	148	
	28.5	82.d	94.d	106.d	118	124	129	135	140	
	29.0	78.d	89.d	101.d	113	118	123	129	134	
	29.5	74.d	84.d	96.d	107.d	113	118	123	127	
	30.0	70.d	80.d	91.d	102.d	107	112	117	121	
	30.5	67.d	76.d	86.d	97.d	102	107	111	116	
	31.0	64.d	73.d	82.d	92.d	98	102	106	110	
	31.5	61.d	69.d	78.d	88.d	93	97	101	105	
	32.0	58.d	66.d	75.d	84.d	89	93	96	100	
	32.5	55.d	63.d	71.d	80.d	85	88	92	95	
	33.0	53.d	60.d	68.d	77.d	81	84	87	91	

NOTES:

- The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
- The maximum unshored span conditions above establish the number of shores required.
- "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
- "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
- I_u is the uncracked moment of inertia based on equivalent steel.
- I_c is the cracked moment of inertia based on equivalent steel.
- An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 1: CS210 LWC - #8 Rebar

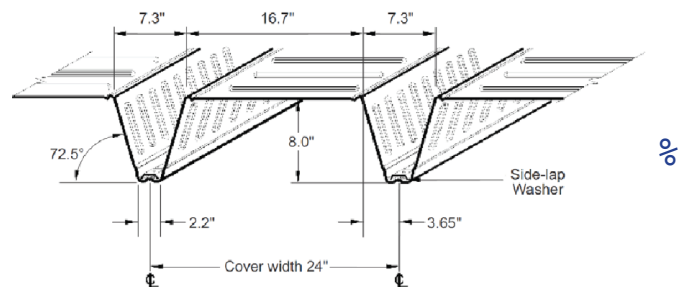



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

		IMPERIAL UNITS									
		Area of Steel Deck Included									
# 9 Rebar		Light Weight Concrete = 110 lb/ft³									
SLAB WEIGHT (psf)	41.7	46.3	50.8	55.4	60.0	64.6	69.2	73.8			
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34			
MAX. UNSHORED ONE SPAN (ft)	13.9	13.3	12.8	12.4	11.9	11.6	11.2	10.9			
MAX. UNSHORED TWO SPAN (ft)	10.8	10.0	9.3	8.7	8.2	7.7	7.3	7.0			
MAX. UNSHORED THREE SPAN (ft)	12.3	11.4	10.6	9.9	9.3	8.8	8.3	7.9			
I _u (in⁴)	56.0	64.5	73.4	82.9	93.0	104.0	116	128			
I _c (in⁴)	33.8	38.0	42.6	47.5	52.8	58.3	64.2	70.4			
DEFLECTION PARAMETER (SLDP)	706	806	913	1026	1147	1277	1415	1564			
DEFLECTION PARAMETER (SWDP)	0.567	0.547	0.528	0.510	0.492	0.474	0.456	0.438			
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0			
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)									
To be established by the designer.	18.0	336.d	360	381	402	423	444	465	486		
	18.5	310.d	339	358	378	398	417	437	457		
	19.0	286.d	319	338	356	375	393	412	430		
	19.5	265.d	302	319	336	354	371	388	406		
	20.0	245.d	280.d	301	318	334	350	366	383		
	20.5	228.d	260.d	285	300	316	331	346	362		
	21.0	212.d	242.d	270	284	299	313	328	342		
	21.5	197.d	225.d	255.d	269	283	296	310	324		
	22.0	184.d	210.d	238.d	255	268	281	294	307		
	22.5	172.d	197.d	223.d	242	254	267	279	291		
	23.0	161.d	184.d	208.d	230	241	253	264	276		
	23.5	151.d	173.d	195.d	219	229	240	251	262		
	24.0	142.d	162.d	183.d	206.d	218	228	239	249		
	24.5	133.d	152.d	172.d	194.d	207	217	227	237		
	25.0	126.d	143.d	162.d	182.d	197	207	216	225		
	25.5	118.d	135.d	153.d	172.d	188	197	205	214		
	26.0	112.d	127.d	144.d	162.d	179	187	196	204		
	26.5	105.d	120.d	136.d	153.d	171	179	186	194		
	27.0	100.d	114.d	129.d	145.d	162.d	170	178	185		
	27.5	94.d	108.d	122.d	137.d	153.d	162	169	176		
	28.0	89.d	102.d	115.d	130.d	145.d	155	162	168		
	28.5	85.d	97.d	110.d	123.d	138.d	148	154	160		
	29.0	80.d	92.d	104.d	117.d	131.d	141	147	153		
	29.5	76.d	87.d	99.d	111.d	124.d	135	140	146		
	30.0	73.d	83.d	94.d	106.d	118.d	129	134	139		
	30.5	69.d	79.d	89.d	100.d	112.d	123	128	133		
	31.0	66.d	75.d	85.d	96.d	107.d	117	122	127		
	31.5	63.d	72.d	81.d	91.d	102.d	112	117	121		
	32.0	60.d	68.d	77.d	87.d	97.d	107	112	116		
	32.5	57.d	65.d	74.d	83.d	93.d	103	107	111		
	33.0	55.d	62.d	71.d	79.d	89.d	98	102	106		
	33.5	52.d	60.d	67.d	76.d	85.d	94	97	101		
	34.0	50.d	57.d	65.d	73.d	81.d	89	93	96		
	34.5	48.d	55.d	62.d	69.d	78.d	86	89	92		
	35.0	46.d	52.d	59.d	66.d	74.d	82	85	88		

		IMPERIAL UNITS									
		Area of Steel Deck Included									
# 9 Rebar		Light Weight Concrete = 110 lb/ft³									
SLAB WEIGHT (psf)	42.5	47.1	51.6	56.2	60.8	65.4	70.0	74.6			
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34			
MAX. UNSHORED ONE SPAN (ft)	18.9	18.3	17.7	17.1	16.6	16.1	15.7	15.3			
MAX. UNSHORED TWO SPAN (ft)	18.2	16.9	15.8	14.8	13.9	13.1	12.4	11.8			
MAX. UNSHORED THREE SPAN (ft)	20.7	19.2	17.9	16.8	15.8	14.9	14.1	13.4			
I _u (in⁴)	57.8	66.4	75.6	85.3	95.8	107.0	119	132			
I _c (in⁴)	36.3	40.9	45.9	51.2	56.9	63.0	69.5	76.3			
DEFLECTION PARAMETER (SLDP)	740	844	956	1074	1202	1338	1484	1640			
DEFLECTION PARAMETER (SWDP)	0.561	0.540	0.521	0.503	0.484	0.466	0.448	0.430			
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0			
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)									
To be established by the designer.	18.0	352.d	395	419	444	468	493	517	542		
	18.5	325.d	370.d	395	418	441	464	487	510		
	19.0	300.d	342.d	372	394	416	437	459	480		
	19.5	277.d	316.d	352	372	392	413	433	453		
	20.0	257.d	293.d	332.d	351	371	390	409	428		
	20.5	239.d	272.d	308.d	333	351	369	387	405		
	21.0	222.d	253.d	287.d	315	332	349	366	383		
	21.5	207.d	236.d	267.d	298	315	331	347	363		
	22.0	193.d	220.d	249.d	280.d	298	314	329	344		
	22.5	180.d	206.d	233.d	262.d	283	298	312	326		
	23.0	169.d	193.d	218.d	245.d	269	283	296	310		
	23.5	158.d	181.d	205.d	230.d	256	269	282	295		
	24.0	149.d	170.d	192.d	216.d	241.d	256	268	280		
	24.5	140.d	159.d	180.d	203.d	227.d	243	255	267		
	25.0	132.d	150.d	170.d	191.d	214.d	232	243	254		
	25.5	124.d	141.d	160.d	180.d	201.d	221	231	242		
	26.0	117.d	133.d	151.d	170.d	190.d	211	221	230		
	26.5	110.d	126.d	143.d	160.d	179.d	200.d	210	220		
	27.0	104.d	119.d	135.d	152.d	170.d	189.d	201	210		
	27.5	99.d	113.d	128.d	143.d	160.d	179.d	192	200		
	28.0	94.d	107.d	121.d	136.d	152.d	169.d	183	191		
	28.5	89.d	101.d	115.d	129.d	144.d	161.d	175	182		
	29.0	84.d	96.d	109.d	122.d	137.d	152.d	167	174		
	29.5	80.d	91.d	103.d	116.d	130.d	145.d	160	167		
	30.0	76.d	87.d	98.d	111.d	124.d	138.d	153	159		
	30.5	72.d	83.d	94.d	105.d	118.d	131.d	145.d	152		
	31.0	69.d	79.d	89.d	100.d	112.d	125.d	138.d	146		
	31.5	66.d	75.d	85.d	95.d	107.d	119.d	132.d	139		
	32.0	63.d	72.d	81.d	91.d	102.d	113.d	126.d	133		
	32.5	60.d	68.d	77.d	87.d	97.d	108.d	120.d	127		
	33.0	57.d	65.d	74.d	83.d	93.d	103.d	115.d	122		
	33.5	55.d	62.d	71.d	79.d	89.d	99.d	110.d	117		
	34.0	52.d	60.d	68.d	76.d	85.d	95.d	105.d	112		
	34.5	50.d	57.d	65.d	73.d	81.d	91.d	100.d	107		
	35.0	48.d	55.d	62.d	70.d	78.d	87.d	96.d	102		

TABLE 1: CS210 LWC - #9 REBAR						IMPERIAL UNITS					
Base Steel Thickness = 0.0435"						Area of Steel Deck Included					
# 9 Rebar						Light Weight Concrete = 110 lb/ft³					
SLAB WEIGHT (psf)	42.1	46.7	51.2	55.8	60.4	65.0	69.6	74.2			
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34			
MAX. UNSHORED ONE SPAN (ft)	16.8	16.2	15.6	15.1	14.6	14.2	13.7	13.3			
MAX. UNSHORED TWO SPAN (ft)	14.3	13.2	12.3	11.6	10.9	10.3	9.7	9.2			
MAX. UNSHORED THREE SPAN (ft)	16.2	15.0	14.0	13.1	12.3	11.7	11.0	10.5			
I _u (in⁴)	56.9	65.4	74.4	84.1	94.4	105.5	117	130			
I _c (in⁴)	35.0	39.4	44.2	49.3	54.8	60.7	66.8	73.4			
DEFLECTION PARAMETER (SLDP)	722	825	933	1049	1174	1307	1449	1602			
DEFLECTION PARAMETER (SWDP)	0.564	0.544	0.525	0.507	0.488	0.470	0.452	0.434			
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0			
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)									
To be established by the designer.	18.0	344.d	378	400	423	446	469	491	514		
	18.5	317.d	356	377	398	420	441	462	484		
	19.0	293.d	334.d	355	375	396	416	436	456		
	19.5	271.d	309.d	335	354	373	392	411	430		
	20.0	251.d	286.d	317	335	353	370	388	406		
	20.5	233.d	266.d	300	317	333	350	367	384		
	21.0	217.d	247.d	280.d	300	316	331	347	363		
	21.5	202.d	230.d	261.d	284	299	314	329	344		
	22.0	188.d	215.d	244.d	269	283	298	312	326		
	22.5	176.d	201.d	228.d	256	269	282	296	309		
	23.0	165.d	188.d	213.d	240.d	256	268	281	293		
	23.5	155.d	177.d	200.d	225.d	243	255	267	279		
	24.0	145.d	166.d	188.d	211.d	231	242	254	265		
	24.5	136.d	156.d	176.d	198.d	220	230	241	252		
	25.0	128.d	147.d	166.d	187.d	209.d	219	230	240		
	25.5	121.d	138.d	156.d	176.d	197.d	209	219	228		
	26.0	114.d	130.d	148.d	166.d	185.d	199	208	217		
	26.5	108.d	123.d	139.d	157.d	175.d	190	199	207		
	27.0	102.d	116.d	132.d	148.d	166.d	181	189	198		
	27.5	96.d	110.d	125.d	140.d	157.d	173	181	188		
	28.0	91.d	104.d	118.d	133.d	149.d	165	172	180		
	28.5	87.d	99.d	112.d	126.d	141.d	157.d	165	172		
	29.0	82.d	94.d	106.d	120.d	134.d	149.d	157	164		
	29.5	78.d	89.d	101.d	114.d	127.d	141.d	150	156		
	30.0	74.d	85.d	96.d	108.d	121.d	134.d	143	149		
	30.5	71.d	81.d	91.d	103.d	115.d	128.d	137	143		
	31.0	67.d	77.d	87.d	98.d	109.d	122.d	131	136		
	31.5	64.d	73.d	83.d	93.d	104.d	116.d	125	130		
32.0	61.d	70.d	79.d	89.d	99.d	111.d	120	125			
32.5	58.d	67.d	76.d	85.d	95.d	106.d	115	119			
33.0	56.d	64.d	72.d	81.d	91.d	101.d	110	114			
33.5	53.d	61.d	69.d	78.d	87.d	97.d	105	109			
34.0	51.d	58.d	66.d	74.d	83.d	92.d	100	104			
34.5	49.d	56.d	63.d	71.d	79.d	88.d	96	99			
35.0	47.d	53.d	60.d	68.d	76.d	85.d	92	95			

TABLE 1: CS210 LWC - #10 REBAR

Base Steel Thickness = 0.0375"					Area of Steel Deck Included							
# 10 Rebar					Light Weight Concrete = 110 lb/ft ³							
SLAB WEIGHT (psf)	42.1	46.7	51.3	55.9	60.5	65.1	69.6	74.2				
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34				
MAX. UNSHORED ONE SPAN (ft)	13.9	13.3	12.8	12.3	11.9	11.5	11.2	10.9				
MAX. UNSHORED TWO SPAN (ft)	10.7	9.9	9.3	8.7	8.2	7.7	7.3	6.9				
MAX. UNSHORED THREE SPAN (ft)	12.2	11.3	10.5	9.9	9.3	8.8	8.3	7.9				
I (in ⁴)	58.1	67.0	76.3	86.3	96.9	108.3	121	134				
I (in ⁴)	37.2	42.0	47.2	52.7	58.6	64.9	71.6	78.6				
DEFLECTION PARAMETER (SWDP)	749	87	972	1093	1224	1363	1512	1671				
DEFLECTION PARAMETER (SLDP)	0.553	0.532	0.513	0.494	0.476	0.458	0.441	0.423				
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0				
SHORING		MAXIMUM NOMINAL LOAD (psf)										
To be established by the designer.	SPAN (ft)	18.0	357.0	408.0	454	479	505	531	556	582		
		18.5	329.0	376.0	426.0	452	476	500	524	548		
		19.0	303.0	347.0	393.0	426	449	471	494	516		
		19.5	281.0	321.0	364.0	402	424	445	466	487		
		20.0	260.0	298.0	337.0	380.0	400	420	441	461		
		20.5	242.0	276.0	313.0	353.0	379	398	417	436		
		21.0	225.0	257.0	291.0	328.0	359	377	395	413		
		21.5	209.0	240.0	272.0	306.0	340	357	374	391		
		22.0	195.0	224.0	253.0	285.0	319.0	339	355	371		
		22.5	183.0	209.0	237.0	267.0	298.0	322	337	352		
		23.0	171.0	196.0	222.0	250.0	279.0	306	320	335		
		23.5	160.0	183.0	208.0	234.0	262.0	291	305	318		
		24.0	151.0	172.0	195.0	220.0	246.0	274.0	290	303		
		24.5	142.0	162.0	184.0	207.0	231.0	257.0	276	288		
		25.0	133.0	152.0	173.0	194.0	218.0	242.0	263	275		
		25.5	126.0	144.0	163.0	183.0	205.0	228.0	251	262		
	26.0	118.0	135.0	154.0	173.0	193.0	215.0	239.0	250			
	26.5	112.0	128.0	145.0	163.0	183.0	203.0	226.0	238			
	27.0	106.0	121.0	137.0	154.0	173.0	192.0	213.0	228			
	27.5	100.0	114.0	130.0	146.0	163.0	182.0	202.0	217			
	28.0	95.0	108.0	123.0	138.0	155.0	172.0	191.0	208			
	28.5	90.0	103.0	117.0	131.0	147.0	164.0	181.0	199			
	29.0	85.0	98.0	111.0	125.0	139.0	155.0	172.0	190			
	29.5	81.0	93.0	105.0	118.0	132.0	147.0	164.0	181.0			
	30.0	77.0	88.0	100.0	112.0	126.0	140.0	156.0	172.0			
	30.5	73.0	83.0	95.0	107.0	121.0	133.0	148.0	164.0			
	31.0	70.0	79.0	91.0	102.0	114.0	127.0	141.0	156.0			
	31.5	67.0	76.0	86.0	97.0	109.0	121.0	134.0	148.0			
	32.0	64.0	73.0	82.0	93.0	104.0	116.0	128.0	142.0			
	32.5	61.0	69.0	79.0	88.0	99.0	110.0	122.0	135.0			
	33.0	58.0	66.0	75.0	85.0	95.0	105.0	117.0	129.0			
	33.5	55.0	63.0	72.0	81.0	90.0	101.0	112.0	123.0			
	34.0	53.0	61.0	69.0	77.0	86.0	96.0	107.0	118.0			
	34.5	51.0	58.0	66.0	74.0	83.0	92.0	102.0	113.0			
	35.0	49.0	56.0	63.0	71.0	79.0	88.0	98.0	108.0			
	35.5	47.0	53.0	60.0	68.0	76.0	85.0	94.0	104.0			
	36.0	45.0	51.0	58.0	65.0	73.0	81.0	90.0	99.0			

TABLE 1: CS210 LWC - #10 REBAR

Base Steel Thickness = 0.0495"				Area of Steel Deck Included						
# 10 Rebar								Light Weight Concrete = 110 lb/ft³		
SLAB WEIGHT (psf)	42.9	47.5	52.1	56.7	61.3	65.9	70.4	75.0		
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	18.9	18.3	17.6	17.1	16.6	16.1	15.7	15.3		
MAX. UNSHORED TWO SPAN (ft)	18.1	16.8	15.7	14.7	13.8	13.1	12.4	11.7		
MAX. UNSHORED THREE SPAN (ft)	20.6	19.1	17.8	16.7	15.7	14.8	14.0	13.3		
I _y (in⁴)	59.8	68.9	78.4	88.7	99.6	111.3	124	137		
I _x (in⁴)	39.5	44.7	50.2	56.2	62.6	69.4	76.6	84.2		
DEFLECTION PARAMETER (SLOP)	781	893	1012	1139	1276	1421	1577	1744		
DEFLECTION PARAMETER (SWDP)	0.548	0.526	0.507	0.488	0.469	0.451	0.434	0.416		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by designer.	18.0	372.d	425.d	482.d	520	549	578	607	636	
	18.5	343.d	392.d	444.d	490	517	545	572	599	
	19.0	316.d	362.d	410.d	461.d	488	514	540	565	
	19.5	293.d	335.d	379.d	427.d	461	485	510	534	
	20.0	271.d	310.d	351.d	396.d	436	459	482	505	
	20.5	252.d	288.d	326.d	367.d	411.d	434	456	478	
	21.0	234.d	268.d	304.d	342.d	383.d	412	432	453	
	21.5	218.d	250.d	283.d	318.d	357.d	391	410	429	
	22.0	204.d	233.d	264.d	297.d	333.d	371.d	389	407	
	22.5	191.d	218.d	247.d	278.d	311.d	347.d	370	387	
	23.0	178.d	204.d	231.d	260.d	291.d	324.d	351	368	
	23.5	167.d	191.d	217.d	244.d	273.d	304.d	334	350	
	24.0	157.d	179.d	203.d	229.d	256.d	286.d	317.d	333	
	24.5	148.d	169.d	191.d	215.d	241.d	268.d	298.d	318	
	25.0	139.d	159.d	180.d	203.d	227.d	253.d	280.d	303	
	25.5	131.d	150.d	170.d	191.d	214.d	238.d	264.d	289	
	26.0	123.d	141.d	160.d	180.d	202.d	225.d	249.d	276.d	
	26.5	117.d	133.d	151.d	170.d	190.d	212.d	235.d	260.d	
	27.0	110.d	126.d	143.d	161.d	180.d	201.d	223.d	246.d	
	27.5	104.d	119.d	135.d	152.d	170.d	190.d	211.d	233.d	
	28.0	99.d	113.d	128.d	144.d	161.d	180.d	200.d	221.d	
	28.5	94.d	107.d	121.d	137.d	153.d	171.d	189.d	209.d	
	29.0	89.d	102.d	115.d	130.d	145.d	162.d	180.d	199.d	
	29.5	85.d	97.d	110.d	123.d	138.d	154.d	171.d	189.d	
	30.0	80.d	92.d	104.d	117.d	131.d	146.d	162.d	179.d	
	30.5	76.d	87.d	99.d	112.d	125.d	139.d	154.d	171.d	
	31.0	73.d	83.d	94.d	106.d	119.d	133.d	147.d	163.d	
	31.5	69.d	79.d	90.d	101.d	113.d	126.d	140.d	155.d	
	32.0	66.d	76.d	86.d	97.d	108.d	120.d	134.d	148.d	
	32.5	63.d	72.d	82.d	92.d	103.d	115.d	128.d	141.d	
	33.0	60.d	69.d	78.d	88.d	99.d	110.d	122.d	135.d	
	33.5	58.d	66.d	75.d	84.d	94.d	105.d	117.d	129.d	
34.0	55.d	63.d	71.d	81.d	90.d	100.d	111.d	123.d		
34.5	53.d	60.d	68.d	77.d	86.d	96.d	107.d	118.d		
35.0	51.d	58.d	66.d	74.d	83.d	92.d	102.d	113.d		
35.5	49.d	55.d	63.d	71.d	79.d	88.d	98.d	108.d		
36.0	47.d	53.d	60.d	68.d	76.d	85.d	94.d	104.d		


TABLE 1: CS210 LWC - #10 REBAR
Rebar Steel Thickness = 0.0435"

Base Steel Thickness = 0.0435"					Area of Steel Deck Included				
# 10 Rebar					Light Weight Concrete = 110 lb/cu ft				
SLAB WEIGHT (psf)	42.5	47.1	51.7	56.3	60.9	65.5	70.0	74.6	
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	16.8	16.1	15.6	15.1	14.6	14.1	13.7	13.3	
MAX. UNSHORED TWO SPAN (ft)	14.2	13.2	12.3	11.5	10.8	10.2	9.7	9.2	
MAX. UNSHORED THREE SPAN (ft)	16.1	15.0	14.0	13.1	12.1	11.0	10.0	9.4	
I _x (in ⁴)	58.9	67.9	77.3	87.4	98.2	109.8	122	136	
J _x (in ⁶)	38.3	43.3	48.7	54.4	60.6	67.1	74.1	81.4	
DEFLECTION PARAMETER (SLDP)	765	874	991	1116	1249	1391	1544	1707	
DEFLECTION PARAMETER (SWDP)	0.551	0.530	0.510	0.491	0.473	0.455	0.437	0.420	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING		MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	SPAN (ft)								
	18.0	364	416	472	500	527	555	582	609
	18.5	335	384	435	471	497	523	548	574
	19.0	310	354	401	444	469	493	517	541
	19.5	286	328	371	418	443	465	488	511
	20.0	265	304	344	387	419	440	462	483
	20.5	247	282	320	360	396	416	437	457
	21.0	229	262	297	335	375	395	414	433
	21.5	214	244	277	312	349	374	392	410
	22.0	199	228	259	291	326	355	372	390
	22.5	186	213	242	272	305	337	354	370
	23.0	175	200	226	255	285	318	336	352
	23.5	164	187	212	239	267	298	320	334
	24.0	154	176	199	224	251	280	304	318
	24.5	144	165	187	211	236	263	290	303
	25.0	136	155	176	198	222	247	274	289
	25.5	128	146	166	187	209	233	259	276
	26.0	121	138	157	176	197	220	244	263
	26.5	114	131	148	167	186	208	230	251
	27.0	108	123	140	157	176	196	218	240
27.5	102	117	132	149	167	186	206	228	
28.0	97	111	125	144	158	176	195	216	
28.5	92	105	119	134	150	167	185	205	
29.0	87	100	113	127	142	158	176	194	
29.5	83	95	107	121	135	151	167	185	
30.0	79	90	102	115	128	143	159	176	
30.5	75	86	97	109	122	136	151	167	
31.0	71	82	92	104	116	130	144	159	
31.5	68	78	88	99	111	124	137	152	
32.0	65	74	84	95	106	118	131	145	
32.5	62	71	80	90	101	113	125	138	
33.0	59	68	77	86	97	108	119	132	
33.5	56	65	73	82	92	103	114	126	
34.0	54	62	70	79	88	98	109	121	
34.5	52	59	67	75	84	94	104	115	
35.0	50	57	64	72	81	90	100	111	
35.5	47	54	62	69	78	86	96	106	
36.0	46	52	59	66	74	83	92	102	

NOTES:

1. The “SLAB WEIGHT” is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. “d” next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. “SLAB THICKNESS” is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 1: CS210 LWC - #10 Rebar

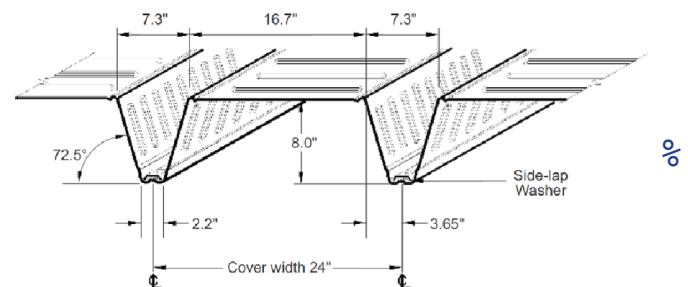



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 1: CS210 LWC - #11 REBAR													IMPERIAL UNITS			
Base Steel Thickness = 0.0375"													Area of Steel Deck Included			
# 11 Rebar													Light Weight Concrete = 110 lb/ft³			
SLAB WEIGHT (psf)	42.6	47.2	51.8	56.4	61.0	65.6	70.1	74.7								
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34								
MAX. UNSHORED ONE SPAN (ft)	13.8	13.3	12.7	12.3	11.9	11.5	11.2	10.9								
MAX. UNSHORED TWO SPAN (ft)	10.7	9.9	9.2	8.6	8.1	7.7	7.3	6.9								
MAX. UNSHORED THREE SPAN (ft)	12.1	11.2	10.5	9.8	9.2	8.7	8.3	7.8								
I _u (in⁴)	60.1	69.4	79.2	89.7	100.8	112.7	126	139								
I _c (in⁴)	40.5	45.9	51.7	57.9	64.5	71.6	79.0	86.9								
DEFLECTION PARAMETER (SLDP)	791	907	1030	1161	1301	1450	1609	1779								
DEFLECTION PARAMETER (SWDP)	0.541	0.519	0.499	0.480	0.461	0.443	0.426	0.409								
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0								
SHORING													MAXIMUM NOMINAL LOAD (psf)			
To be established by the designer.	SPAN (ft)	18.0	377.d	432.d	491.d	553.d	623	654	685							
	18.5	347.d	398.d	452.d	509.d	558	587	616	645							
	19.0	321.d	367.d	417.d	470.d	527.d	554	581	609							
	19.5	296.d	340.d	386.d	435.d	487.d	524	549	575							
	20.0	275.d	315.d	358.d	403.d	452.d	495	520	544							
	20.5	255.d	293.d	332.d	374.d	419.d	467.d	492	515							
	21.0	237.d	272.d	309.d	348.d	390.d	435.d	466	488							
	21.5	221.d	254.d	288.d	325.d	364.d	405.d	443	463							
	22.0	206.d	237.d	269.d	303.d	339.d	378.d	420.d	440							
	22.5	193.d	221.d	251.d	283.d	317.d	354.d	392.d	418							
	23.0	181.d	207.d	235.d	265.d	297.d	331.d	367.d	398							
	23.5	169.d	194.d	220.d	249.d	278.d	310.d	344.d	378							
	24.0	159.d	182.d	207.d	233.d	261.d	291.d	323.d	358.d							
	24.5	149.d	171.d	195.d	219.d	246.d	274.d	304.d	336.d							
	25.0	141.d	161.d	183.d	206.d	231.d	258.d	286.d	316.d							
	25.5	133.d	152.d	173.d	195.d	218.d	243.d	270.d	298.d							
	26.0	125.d	143.d	163.d	183.d	206.d	229.d	254.d	281.d							
	26.5	118.d	135.d	154.d	173.d	194.d	216.d	240.d	266.d							
	27.0	112.d	128.d	145.d	164.d	184.d	205.d	227.d	251.d							
	27.5	106.d	121.d	138.d	155.d	174.d	194.d	215.d	238.d							
	28.0	100.d	115.d	130.d	147.d	165.d	183.d	204.d	225.d							
	28.5	95.d	109.d	124.d	139.d	156.d	174.d	193.d	214.d							
	29.0	90.d	103.d	117.d	132.d	148.d	165.d	183.d	203.d							
	29.5	86.d	98.d	111.d	126.d	141.d	157.d	174.d	193.d							
	30.0	81.d	93.d	106.d	119.d	134.d	149.d	166.d	183.d							
	30.5	77.d	89.d	101.d	114.d	127.d	142.d	158.d	174.d							
	31.0	74.d	85.d	96.d	108.d	121.d	135.d	150.d	166.d							
	31.5	70.d	81.d	92.d	103.d	116.d	129.d	143.d	158.d							
	32.0	67.d	77.d	87.d	98.d	110.d	123.d	136.d	151.d							
	32.5	64.d	73.d	83.d	94.d	105.d	117.d	130.d	144.d							
	33.0	61.d	70.d	80.d	90.d	101.d	112.d	124.d	138.d							
	33.5	58.d	67.d	76.d	86.d	96.d	107.d	119.d	131.d							
	34.0	56.d	64.d	73.d	82.d	92.d	102.d	114.d	126.d							
	34.5	54.d	61.d	70.d	79.d	88.d	98.d	109.d	120.d							
	35.0	51.d	59.d	67.d	75.d	84.d	94.d	104.d	115.d							
	35.5	49.d	56.d	64.d	72.d	81.d	90.d	100.d	110.d							
	36.0	47.d	54.d	61.d	69.d	77.d	86.d	96.d	106.d							

TABLE 1: CS210 LWC - #11 REBAR										IMPERIAL UNITS						
Base Steel Thickness = 0.0495"										Area of Steel Deck Included						
# 11 Rebar										Light Weight Concrete = 110 lb/ft³						
SLAB WEIGHT (psf)	43.4	48.0	52.6	57.2	61.8	66.4	70.9	75.5								
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34								
MAX. UNSHORED ONE SPAN (ft)	18.8	18.2	17.6	17.0	16.5	16.1	15.6	15.2								
MAX. UNSHORED TWO SPAN (ft)	18.0	16.7	15.6	14.6	13.8	13.0	12.3	11.7								
MAX. UNSHORED THREE SPAN (ft)	20.5	19.0	17.7	16.6	15.6	14.8	14.0	13.3								
I _u (in⁴)	61.7	71.3	81.3	92.0	103.4	115.6	129	143								
I _c (in⁴)	42.8	48.4	54.6	61.2	68.2	75.7	83.7	92.1								
DEFLECTION PARAMETER (SLDP)	822	942	1069	1205	1350	1505	1671	1849								
DEFLECTION PARAMETER (SWDP)	0.537	0.514	0.493	0.474	0.456	0.438	0.420	0.403								
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0								
SHORING		SPAN (ft)		MAXIMUM NOMINAL LOAD (psf)												
To be established by the designer.	18.0	392.d	449.d	509.d	574.d	635	669	703	738							
	18.5	361.d	413.d	469.d	529.d	592.d	631	663	695							
	19.0	333.d	381.d	433.d	488.d	547.d	596	626	656							
	19.5	308.d	353.d	400.d	451.d	506.d	563	592	620							
	20.0	285.d	327.d	371.d	418.d	469.d	523.d	560	587							
	20.5	265.d	304.d	345.d	388.d	435.d	485.d	530	556							
	21.0	247.d	282.d	321.d	361.d	405.d	452.d	501.d	527							
	21.5	230.d	263.d	299.d	337.d	377.d	421.d	467.d	500							
	22.0	214.d	246.d	279.d	314.d	352.d	393.d	436.d	475							
	22.5	200.d	230.d	261.d	294.d	329.d	367.d	408.d	451.d							
	23.0	188.d	215.d	244.d	275.d	308.d	344.d	382.d	422.d							
	23.5	176.d	202.d	229.d	258.d	289.d	322.d	358.d	396.d							
	24.0	165.d	189.d	215.d	242.d	271.d	302.d	336.d	371.d							
	24.5	155.d	178.d	202.d	228.d	255.d	284.d	316.d	349.d							
	25.0	146.d	167.d	190.d	214.d	240.d	268.d	297.d	329.d							
	25.5	138.d	158.d	179.d	202.d	226.d	252.d	280.d	310.d							
	26.0	130.d	149.d	169.d	190.d	213.d	238.d	264.d	292.d							
	26.5	123.d	141.d	160.d	180.d	202.d	225.d	249.d	276.d							
	27.0	116.d	133.d	151.d	170.d	191.d	212.d	236.d	261.d							
	27.5	110.d	126.d	143.d	161.d	180.d	201.d	223.d	247.d							
28.0	104.d	119.d	135.d	152.d	171.d	190.d	211.d	234.d								
28.5	99.d	113.d	128.d	145.d	162.d	181.d	201.d	222.d								
29.0	94.d	107.d	122.d	137.d	154.d	171.d	190.d	211.d								
29.5	89.d	102.d	116.d	130.d	146.d	163.d	181.d	200.d								
30.0	85.d	97.d	110.d	124.d	139.d	155.d	172.d	190.d								
30.5	80.d	92.d	105.d	118.d	132.d	147.d	164.d	181.d								
31.0	77.d	88.d	100.d	112.d	126.d	140.d	156.d	172.d								
31.5	73.d	84.d	95.d	107.d	120.d	134.d	149.d	164.d								
32.0	70.d	80.d	91.d	102.d	114.d	128.d	142.d	157.d								
32.5	67.d	76.d	86.d	97.d	109.d	122.d	135.d	150.d								
33.0	64.d	73.d	83.d	93.d	104.d	116.d	129.d	143.d								
33.5	61.d	70.d	79.d	89.d	100.d	111.d	123.d	137.d								
34.0	58.d	67.d	76.d	85.d	95.d	106.d	118.d	131.d								
34.5	56.d	64.d	72.d	82.d	91.d	102.d	113.d	125.d								
35.0	53.d	61.d	69.d	78.d	87.d	98.d	108.d	120.d								
35.5	51.d	58.d	66.d	75.d	84.d	93.d	104.d	115.d								
36.0	49.d	56.d	64.d	72.d	80.d	90.d	100.d	110.d								



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 2: CS210 NWC - #3 REBAR									
IMPERIAL UNITS									
Base Steel Thickness = 0.0375"									
Area of Steel Deck Included									
# 3 Rebar									
Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	52.1	58.1	64.1	70.2	76.2	82.3	88.3	94.4	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	12.2	11.7	11.2	10.8	10.4	10.1	9.8	9.5	
MAX. UNSHORED TWO SPAN (ft)	9.1	8.4	7.7	7.2	6.7	6.3	6.0	5.6	
MAX. UNSHORED THREE SPAN (ft)	10.3	9.5	8.8	8.2	7.7	7.2	6.8	6.3	
I _u (in⁴)	54.6	62.5	70.9	80.0	89.9	100.6	112	125	
I _c (in⁴)	19.1	21.2	23.5	26.0	28.6	31.3	34.3	37.3	
DEFLECTION PARAMETER (SLDP)	579	658	743	834	932	1038	1153	1278	
DEFLECTION PARAMETER (SWDP)	0.728	0.709	0.690	0.669	0.647	0.624	0.600	0.575	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	175	185	195	204	214	223	233	243
	14.5	161	169	178	187	195	204	213	221
	15.0	148	155	163	171	179	187	194	202
	15.5	136	143	150	157	164	171	178	185
	16.0	125	131	138	144	150	157	163	169
	16.5	115	121	127	132	138	144	149	155
	17.0	106	111	116	122	127	132	137	142
	17.5	98	103	107	112	116	121	125	130
	18.0	91	95	99	103	107	111	115	119
	18.5	84	87	91	94	98	102	105	109
	19.0	77	80	84	87	90	93	96	99
	19.5	71	74	77	80	83	85	88	91
	20.0	66	68	71	73	76	78	80	83
	20.5	61	63	65	67	69	71	73	75
	21.0	56	58	60	62	63	65	67	69
	21.5	52	53	55	56	58	59	61	62
	22.0	48	49	50	51	53	54	55	56
	22.5	44	45	46	47	48	49	50	51
	23.0	40	41	42	43	43	44	45	45
	23.5								
	24.0								
	24.5								
	25.0								


TABLE 2: CS210 NWC - #3 REBAR									
IMPERIAL UNITS									
Base Steel Thickness = 0.0495"									
Area of Steel Deck Included									
# 3 Rebar									
Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	52.9	58.9	64.9	71.0	77.0	83.1	89.1	95.2	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	17.0	16.3	15.7	15.1	14.6	14.1	13.7	13.3	
MAX. UNSHORED TWO SPAN (ft)	15.4	14.2	13.1	12.2	11.4	10.7	10.1	9.6	
MAX. UNSHORED THREE SPAN (ft)	17.5	16.1	14.9	13.9	13.0	12.2	11.5	10.9	
I _u (in⁴)	56.6	64.8	73.5	82.9	93.1	104.2	116	129	
I _c (in⁴)	22.5	25.2	28.0	31.1	34.4	37.9	41.6	45.5	
DEFLECTION PARAMETER (SLDP)	622	707	799	897	1003	1118	1242	1376	
DEFLECTION PARAMETER (SWDP)	0.713	0.694	0.674	0.653	0.631	0.608	0.585	0.561	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	232	247	262	277	292	307	322	337
	14.5	214	227	241	255	269	282	296	310
	15.0	197	210	222	235	247	260	272	285
	15.5	182	193	205	216	228	239	251	262
	16.0	168	179	189	200	210	221	231	242
	16.5	156	166	175	185	194	204	213	223
	17.0	145	153	162	171	180	188	197	206
	17.5	134	142	150	158	166	174	182	190
	18.0	125	132	139	147	154	161	169	176
	18.5	116	123	129	136	143	149	156	163
	19.0	108	114	120	126	132	138	145	151
	19.5	100	106	112	117	123	128	134	139
	20.0	93	99	104	109	114	119	124	129
	20.5	87	92	96	101	106	110	115	119
	21.0	81	85	89	94	98	102	106	110
	21.5	76	79	83	87	91	94	98	102
	22.0	70	74	77	81	84	87	91	94
	22.5	66	69	72	75	78	81	84	87
	23.0	61	64	66	69	72	75	77	80
	23.5	57	59	62	64	66	69	71	74
	24.0	53	55	57	59	61	63	66	68
	24.5	49	51	53	55	57	58	60	62
	25.0	46	47	49	50	52	54	55	57

TABLE 2: CS210 NWC - #3 REBAR									
IMPERIAL UNITS									
Base Steel Thickness = 0.0435"									
Area of Steel Deck Included									
# 3 Rebar									
Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	52.5	58.5	64.5	70.6	76.6	82.7	88.7	94.8	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	15.0	14.3	13.7	13.2	12.7	12.3	11.9	11.6	
MAX. UNSHORED TWO SPAN (ft)	12.1	11.1	10.3	9.6	8.9	8.4	7.9	7.5	
MAX. UNSHORED THREE SPAN (ft)	13.7	12.6	11.7	10.9	10.2	9.5	9.0	8.5	
I _u (in⁴)	55.5	63.6	72.2	81.4	91.5	102.4	114	127	
I _c (in⁴)	20.8	23.2	25.8	28.5	31.5	34.6	37.9	41.4	
DEFLECTION PARAMETER (SLDP)	600	682	770	865	967	1078	1197	1327	
DEFLECTION PARAMETER (SWDP)	0.721	0.702	0.682	0.661	0.639	0.616	0.592	0.568	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	204	216	229	241	254	266	278	291
	14.5	188	199	210	221	233	244	255	266
	15.0	173	183	193	203	214	224	234	244
	15.5	159	169	178	187	196	206	215	224
	16.0	147	155	164	172	181	189	198	206
	16.5	136	144	151	159	167	174	182	189
	17.0	126	133	140	147	154	160	167	174
	17.5	116	123	129	135	142	148	154	161
	18.0	108	114	119	125	131	136	142	148
	18.5	100	105	110	116	121	126	131	136
	19.0	93	97	102	107	111	116	121	125
	19.5	86	90	95	99	103	107	111	115
	20.0	80	84	87	91	95	99	103	106
	20.5	74	78	81	84	88	91	94	98
	21.0	69	72	75	78	81	84	87	90
	21.5	64	67	69	72	74	77	80	82
	22.0	59	62	64	66	69	71	73	75
	22.5	55	57	59	61	63	65	67	69
	23.0	51	53	54	56	58	60	61	63
	23.5	47	49	50	51	53	54	56	57
	24.0	43	45	46	47	48	50	51	52
	24.5	40	41	42	43	44	45	46	47
	25.0					40	41	42	42

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 2: CS210 NWC - #3 Rebar

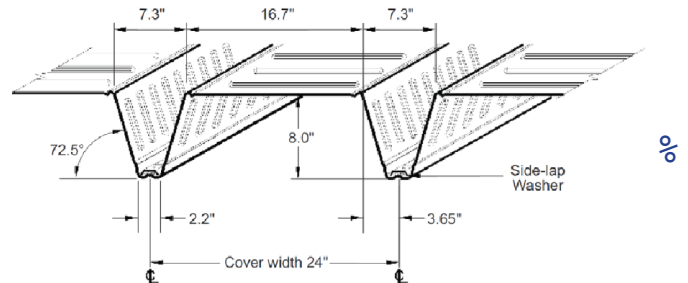



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 2: CS210 NWC - #4 REBAR									
Base Steel Thickness = 0.0375"									
IMPERIAL UNITS									
Area of Steel Deck Included									
# 4 Rebar									
Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	52.2	58.3	64.3	70.3	76.4	82.4	88.5	94.5	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	12.2	11.7	11.2	10.8	10.4	10.1	9.8	9.5	
MAX. UNSHORED TWO SPAN (ft)	9.1	8.4	7.7	7.2	6.7	6.3	6.0	5.6	
MAX. UNSHORED THREE SPAN (ft)	10.3	9.5	8.8	8.2	7.6	7.2	6.8	6.3	
I _u (in⁴)	55.6	63.7	72.3	81.6	91.7	102.6	115	127	
I _c (in⁴)	21.0	23.4	26.0	28.7	31.6	34.7	38.0	41.4	
DEFLECTION PARAMETER (SLDP)	603	685	773	868	970	1080	1199	1328	
DEFLECTION PARAMETER (SWDP)	0.716	0.697	0.678	0.657	0.635	0.613	0.589	0.566	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	216	228	240	252	264	276	288	300
	14.5	198	209	220	231	242	253	264	275
	15.0	183	193	203	213	223	232	242	252
	15.5	169	178	187	196	205	214	223	232
	16.0	156	164	172	180	189	197	205	213
	16.5	144	152	159	167	174	181	189	196
	17.0	134	140	147	154	161	167	174	181
	17.5	124	130	136	142	148	154	161	167
	18.0	115	120	126	132	137	143	148	154
	18.5	107	112	117	122	127	132	137	142
	19.0	99	104	108	113	117	122	126	131
	19.5	92	96	100	104	108	112	116	120
	20.0	86	89	93	97	100	104	107	111
	20.5	80	83	86	89	93	96	99	102
	21.0	74	77	80	83	85	88	91	94
	21.5	69	71	74	76	79	81	84	86
	22.0	64	66	68	71	73	75	77	79
	22.5	59	61	63	65	67	69	71	73
	23.0	55	57	58	60	62	63	65	67
	23.5	51	53	54	55	57	58	59	61
	24.0	48	49	50	51	52	53	54	55
	24.5	44	45	46	47	48	49	49	50
	25.0	41	41	42	43	43	44	45	45
	25.5						40	41	41
	26.0								
	26.5								
	27.0								
	27.5								
	28.0								

TABLE 2: CS210 NWC - #4 REBAR									
Base Steel Thickness = 0.0435"									
IMPERIAL UNITS									
Area of Steel Deck Included									
# 4 Rebar									
Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	52.6	58.7	64.7	70.7	76.8	82.8	88.9	94.9	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	15.0	14.3	13.7	13.2	12.7	12.3	11.9	11.6	
MAX. UNSHORED TWO SPAN (ft)	12.0	11.1	10.3	9.5	8.9	8.4	7.9	7.5	
MAX. UNSHORED THREE SPAN (ft)	13.7	12.6	11.6	10.8	10.1	9.5	9.0	8.5	
I _u (in⁴)	56.6	64.8	73.6	83.0	93.2	104.3	116	130	
I _c (in⁴)	22.7	25.3	28.1	31.2	34.4	37.9	41.5	45.4	
DEFLECTION PARAMETER (SLDP)	623	709	800	898	1004	1119	1242	1376	
DEFLECTION PARAMETER (SWDP)	0.709	0.690	0.671	0.650	0.628	0.606	0.582	0.559	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	244	259	274	289	303	318	333	348
	14.5	225	238	252	265	279	293	306	320
	15.0	207	220	232	245	257	269	282	294
	15.5	192	203	214	226	237	248	260	271
	16.0	178	188	198	209	219	229	239	250
	16.5	165	174	183	193	202	212	221	231
	17.0	153	161	170	179	187	196	205	213
	17.5	142	150	158	166	173	181	189	197
	18.0	132	139	146	154	161	168	175	182
	18.5	123	129	136	143	149	156	162	169
	19.0	114	120	126	132	138	144	150	156
	19.5	107	112	118	123	129	134	139	145
	20.0	99	104	109	114	119	124	129	134
	20.5	93	97	102	106	111	115	120	124
	21.0	87	91	95	99	103	107	111	115
	21.5	81	84	88	92	96	99	103	107
	22.0	75	79	82	85	89	92	95	99
	22.5	70	73	76	79	82	85	88	91
	23.0	66	68	71	74	76	79	81	84
	23.5	61	64	66	68	71	73	75	78
	24.0	57	59	61	63	65	67	69	71
	24.5	53	55	57	59	60	62	64	66
	25.0	49	51	53	54	56	57	59	60
	25.5	46	47	49	50	51	53	54	55
	26.0	43	44	45	46	47	48	49	50
	26.5		41	41	42	43	44	45	46
	27.0						40	41	42
	27.5								
	28.0								

TABLE 2: CS210 NWC - #4 REBAR					IMPERIAL UNITS					
Base Steel Thickness = 0.0495"					Area of Steel Deck Included					
# 4 Rebar					Normal Weight Concrete = 145 lb/ft³					
SLAB WEIGHT (psf)	53.0	59.1	65.1	71.1	77.2	83.2	89.3	95.3		
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	17.0	16.3	15.7	15.1	14.6	14.1	13.7	13.3		
MAX. UNSHORED TWO SPAN (ft)	15.4	14.1	13.1	12.2	11.4	10.7	10.1	9.6		
MAX. UNSHORED THREE SPAN (ft)	17.5	16.1	14.9	13.9	13.0	12.2	11.5	10.9		
I _u (in⁴)	57.6	66.0	74.9	84.5	94.9	106.1	118	132		
I _c (in⁴)	24.4	27.2	30.3	33.7	37.2	41.0	45.1	49.3		
DEFLECTION PARAMETER (SLDP)	645	733	828	929	1039	1158	1286	1424		
DEFLECTION PARAMETER (SWDP)	0.702	0.683	0.663	0.642	0.621	0.598	0.575	0.552		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING		MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	SPAN (ft)	14.0	272	289	307	324	342	359	377	394
	14.5	251	267	283	299	315	331	347	363	
	15.0	232	246	261	276	290	305	320	334	
	15.5	214	228	241	255	268	282	295	309	
	16.0	199	211	223	236	248	260	273	285	
	16.5	184	196	207	218	230	241	253	264	
	17.0	171	182	192	203	213	224	234	244	
	17.5	160	169	179	188	198	207	217	227	
	18.0	149	157	166	175	184	193	201	210	
	18.5	139	147	155	163	171	179	187	195	
	19.0	129	137	144	152	159	167	174	181	
	19.5	121	128	134	141	148	155	162	169	
	20.0	113	119	125	132	138	144	150	157	
	20.5	105	111	117	123	129	134	140	146	
	21.0	99	104	109	114	120	125	130	136	
	21.5	92	97	102	107	112	116	121	126	
	22.0	86	91	95	100	104	108	113	117	
	22.5	81	85	89	93	97	101	105	109	
	23.0	76	79	83	87	90	94	97	101	
	23.5	71	74	77	81	84	87	91	94	
	24.0	66	69	72	75	78	81	84	87	
	24.5	62	65	67	70	73	75	78	81	
	25.0	58	60	63	65	67	70	72	75	
	25.5	54	56	58	60	63	65	67	69	
	26.0	51	52	54	56	58	60	62	64	
	26.5	47	49	50	52	54	55	57	59	
	27.0	44	45	47	48	50	51	52	54	
	27.5	41	42	43	45	46	47	48	49	
	28.0			40	41	42	43	44	45	



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

					IMPERIAL UNITS				
Base Steel Thickness = 0.0375"					Area of Steel Deck Included				
# 5 Rebar				Normal Weight Concrete = 145 lb/ft ³					
SLAB WEIGHT (psf)	52.4	58.4	64.5	70.5	76.6	82.6	88.7	94.7	
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	12.6	12.1	11.6	11.1	10.7	10.4	10.1	9.8	
MAX. UNSHORED TWO SPAN (ft)	9.1	8.3	7.7	7.2	6.7	6.3	5.9	5.6	
MAX. UNSHORED THREE SPAN (ft)	10.3	9.5	8.8	8.2	7.6	7.2	6.8	6.3	
I _u (in ⁴)	56.9	65.2	74.1	83.6	93.9	105.0	117	130	
I _c (in ⁴)	23.3	26.0	28.9	32.0	35.3	38.8	42.5	46.4	
DEFLECTION PARAMETER (SLDP)	631	718	810	910	1016	1132	1256	1390	
DEFLECTION PARAMETER (SWDP)	0.702	0.683	0.664	0.644	0.622	0.600	0.577	0.554	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	276	292	307	323	339	355	371	387
	14.5	254	269	283	298	312	327	341	356
	15.0	235	248	262	275	288	301	315	328
	15.5	218	230	242	254	266	278	291	303
	16.0	202	213	224	235	246	257	269	280
	16.5	187	198	208	218	228	238	249	259
	17.0	174	184	193	202	212	221	230	240
	17.5	162	171	179	188	196	205	214	222
	18.0	151	159	167	175	183	190	198	206
	18.5	141	148	155	163	170	177	184	191
	19.0	132	138	145	151	158	165	171	178
	19.5	123	129	135	141	147	153	159	165
	20.0	115	121	126	131	137	142	148	153
	20.5	108	113	118	123	128	133	138	143
	21.0	101	105	110	114	119	123	128	133
	21.5	94	98	103	107	111	115	119	123
	22.0	88	92	96	99	103	107	111	114
	22.5	83	86	89	93	96	100	103	106
	23.0	77	80	83	87	90	93	96	99
23.5	72	75	78	81	83	86	89	92	
24.0	68	70	73	75	78	80	82	85	
24.5	64	66	68	70	72	74	76	79	
25.0	59	61	63	65	67	69	71	73	
25.5	56	57	59	61	62	64	65	67	
26.0	52	53	55	56	58	59	60	62	


TABLE 2: CS210 NWC - #5 REBAR					IMPERIAL UNITS				
Base Steel Thickness = 0.0495"					Area of Steel Deck Included				
# 5 Rebar					Normal Weight Concrete = 145 lb/ft³				
SLAB WEIGHT (psf)	53.2	59.2	65.3	71.3	77.4	83.4	89.4	95.5	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	17.5	16.7	16.1	15.6	15.0	14.5	14.1	13.7	
MAX. UNSHORED TWO SPAN (ft)	15.3	14.1	13.1	12.2	11.4	10.7	10.1	9.5	
MAX. UNSHORED THREE SPAN (ft)	17.4	16.0	14.9	13.8	12.9	12.2	11.5	10.9	
I _u (in⁴)	58.9	67.5	76.6	86.4	97.0	108.5	121	135	
I _c (in⁴)	26.5	29.7	33.1	36.8	40.7	44.9	49.3	54.0	
DEFLECTION PARAMETER (SLDP)	672	764	863	969	1084	1207	1340	1484	
DEFLECTION PARAMETER (SWDP)	0.689	0.670	0.650	0.630	0.608	0.586	0.564	0.541	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	334	356	377	399	421	442	464	486
	14.5	309	329	349	368	388	408	428	448
	15.0	286	304	323	341	359	377	396	414
	15.5	265	282	299	316	333	349	366	383
	16.0	246	262	278	293	309	324	340	355
	16.5	229	244	258	272	287	301	315	330
	17.0	214	227	240	253	267	280	293	306
	17.5	200	212	224	236	248	261	273	285
	18.0	186	198	209	220	232	243	254	266
	18.5	174	185	195	206	216	227	237	248
	19.0	163	173	183	192	202	212	221	231
	19.5	153	162	171	180	189	198	207	216
	20.0	143	152	160	168	177	185	193	202
	20.5	135	142	150	158	165	173	181	188
	21.0	126	133	141	148	155	162	169	176
	21.5	119	125	132	138	145	152	158	165
	22.0	112	118	124	130	136	142	148	154
	22.5	105	111	116	122	127	133	139	144
	23.0	99	104	109	114	119	125	130	135
23.5	93	98	102	107	112	117	121	126	
24.0	87	92	96	101	105	109	114	118	
24.5	82	86	90	94	98	102	106	110	
25.0	77	81	85	88	92	96	100	103	
25.5	73	76	80	83	86	90	93	96	
26.0	69	72	75	78	81	84	87	90	

Base Steel Thickness = 0.0435"					IMPERIAL UNITS				
# 5 Rebar		Area of Steel Deck Included							
		Normal Weight Concrete = 145 lb/ft³							
SLAB WEIGHT (psf)	52.8	58.8	64.9	70.9	77.0	83.0	89.0	95.1	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	15.4	14.8	14.1	13.6	13.1	12.7	12.3	11.9	
MAX. UNSHORED TWO SPAN (ft)	12.0	11.1	10.2	9.5	8.9	8.4	7.9	7.5	
MAX. UNSHORED THREE SPAN (ft)	13.7	12.6	11.6	10.8	10.1	9.5	9.0	8.5	
I _u (in⁴)	57.9	66.3	75.3	84.9	95.4	106.7	119	132	
I _c (in⁴)	24.9	27.8	31.0	34.4	38.0	41.9	45.9	50.2	
DEFLECTION PARAMETER (SLDP)	651	741	836	939	1050	1169	1298	1437	
DEFLECTION PARAMETER (SWDP)	0.696	0.677	0.657	0.637	0.615	0.593	0.571	0.548	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	305	324	343	362	381	400	418	437
	14.5	282	299	316	334	351	368	385	403
	15.0	261	277	293	308	324	340	356	372
	15.5	242	256	271	285	300	314	329	344
	16.0	224	238	251	265	278	291	305	318
	16.5	209	221	233	246	258	270	282	295
	17.0	194	206	217	228	240	251	262	274
	17.5	181	192	202	212	223	233	244	254
	18.0	169	179	188	198	207	217	227	236
	18.5	158	167	176	184	193	202	211	220
	19.0	148	156	164	172	180	188	197	205
	19.5	138	146	153	161	168	176	183	191
	20.0	129	136	143	150	157	164	171	178
	20.5	121	128	134	140	147	153	159	166
	21.0	114	120	125	131	137	143	149	155
	21.5	107	112	117	123	128	134	139	144
	22.0	100	105	110	115	120	125	130	135
	22.5	94	98	103	107	112	117	121	126
	23.0	88	92	96	101	105	109	113	117
	23.5	83	87	90	94	98	102	105	109
24.0	78	81	85	88	91	95	98	102	
24.5	73	76	79	82	85	89	92	95	
25.0	69	71	74	77	80	83	85	88	
25.5	64	67	69	72	74	77	79	82	
26.0	60	63	65	67	69	72	74	76	

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 2: CS210 NWC - #5 Rebar

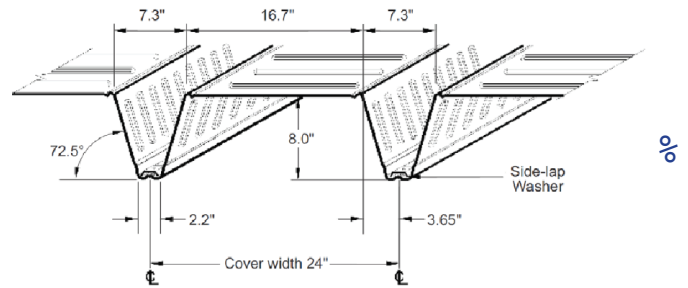



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 2: CS210 NWC - #6 REBAR									
Base Steel Thickness = 0.0375"									
IMPERIAL UNITS									
# 6 Rebar									
Area of Steel Deck Included									
Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	52.6	58.7	64.7	70.8	76.8	82.8	88.9	94.9	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	12.6	12.0	11.5	11.1	10.7	10.4	10.1	9.8	
MAX. UNSHORED TWO SPAN (ft)	9.0	8.3	7.7	7.2	6.7	6.3	5.9	5.5	
MAX. UNSHORED THREE SPAN (ft)	10.3	9.5	8.8	8.2	7.6	7.2	6.7	6.3	
I _u (in⁴)	58.4	67.0	76.1	85.9	96.4	107.9	120	134	
I _c (in⁴)	26.0	29.0	32.3	35.9	39.6	43.6	47.7	52.2	
DEFLECTION PARAMETER (SLDP)	664	756	853	958	1070	1191	1322	1462	
DEFLECTION PARAMETER (SWDP)	0.687	0.668	0.649	0.628	0.607	0.586	0.564	0.541	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	336	356	376	396	415	435	455	475
	14.5	311	329	347	365	383	401	420	438
	15.0	288	304	321	338	354	371	388	404
	15.5	267	282	298	313	328	344	359	374
	16.0	248	262	276	290	304	319	333	347
	16.5	231	244	257	270	283	296	309	322
	17.0	215	227	239	251	263	275	287	299
	17.5	201	212	223	234	245	256	267	278
	18.0	188	198	208	218	228	239	249	259
	18.5	176	185	194	204	213	223	232	241
	19.0	165	173	182	191	199	208	217	225
	19.5	154	162	170	178	186	194	202	210
	20.0	145	152	159	167	174	182	189	196
	20.5	136	143	149	156	163	170	177	183
	21.0	128	134	140	146	153	159	165	171
	21.5	120	126	131	137	143	149	154	160
	22.0	113	118	123	129	134	139	145	150
	22.5	106	111	116	121	125	130	135	140
	23.0	100	104	109	113	118	122	127	131
	23.5	94	98	102	106	110	114	118	123
	24.0	88	92	96	100	103	107	111	115
	24.5	83	87	90	93	97	100	104	107
	25.0	78	81	85	88	91	94	97	100
	25.5	74	77	79	82	85	88	91	93
	26.0	69	72	74	77	80	82	85	87
	26.5	65	68	70	72	74	77	79	81
	27.0	62	64	66	68	70	72	74	76
	27.5	58	60	61	63	65	67	69	70
	28.0	54	56	58	59	61	62	64	65
	28.5	51	53	54	55	57	58	59	61
	29.0	48	49	50	51	53	54	55	56

TABLE 2: CS210 NWC - #6 REBAR									
Base Steel Thickness = 0.0435"									
IMPERIAL UNITS									
# 6 Rebar									
Area of Steel Deck Included									
Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	53.0	59.1	65.1	71.2	77.2	83.2	89.3	95.3	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	15.4	14.7	14.1	13.6	13.1	12.7	12.3	11.9	
MAX. UNSHORED TWO SPAN (ft)	12.0	11.0	10.2	9.5	8.9	8.4	7.9	7.5	
MAX. UNSHORED THREE SPAN (ft)	13.6	12.5	11.6	10.8	10.1	9.5	9.0	8.5	
I _u (in⁴)	59.3	68.0	77.3	87.2	97.9	109.5	122	136	
I _c (in⁴)	27.5	30.8	34.3	38.1	42.2	46.5	51.0	55.8	
DEFLECTION PARAMETER (SLDP)	683	777	878	986	1102	1227	1362	1507	
DEFLECTION PARAMETER (SWDP)	0.682	0.662	0.643	0.622	0.601	0.580	0.558	0.536	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)							
To be established by the designer.	14.0	365	388	411	433	456	479	502	524
	14.5	338	359	380	400	421	442	463	484
	15.0	313	332	351	371	390	409	428	447
	15.5	291	308	326	344	361	379	397	415
	16.0	270	287	303	319	336	352	368	385
	16.5	252	267	282	297	312	327	342	357
	17.0	235	249	263	277	291	305	319	333
	17.5	219	232	245	258	271	284	297	310
	18.0	205	217	229	241	253	265	277	289
	18.5	192	203	214	225	236	248	259	270
	19.0	180	190	201	211	221	231	242	252
	19.5	169	179	188	198	207	217	226	236
	20.0	159	168	176	185	194	203	212	220
	20.5	149	157	165	174	182	190	198	206
	21.0	140	148	155	163	171	178	186	193
	21.5	132	139	146	153	160	167	174	181
	22.0	124	131	137	144	150	157	163	170
	22.5	117	123	129	135	141	147	153	159
	23.0	110	116	121	127	133	138	144	149
	23.5	104	109	114	119	125	130	135	140
	24.0	98	103	108	112	117	122	126	131
	24.5	92	97	101	106	110	114	119	123
	25.0	87	91	95	99	103	107	111	115
	25.5	82	86	90	93	97	101	104	108
	26.0	78	81	84	88	91	95	98	101
	26.5	73	76	79	82	86	89	92	95
	27.0	69	72	75	78	80	83	86	89
	27.5	65	68	70	73	75	78	80	83
	28.0	61	64	66	68	71	73	75	77
	28.5	58	60	62	64	66	68	70	72
	29.0	55	56	58	60	62	64	66	67

TABLE 2: CS210 NWC - #6 REBAR						IMPERIAL UNITS			
Base Steel Thickness = 0.0495"						Area of Steel Deck Included			
# 6 Rebar						Normal Weight Concrete = 145 lb/ft³			
SLAB WEIGHT (psf)	53.4	59.5	65.5	71.6	77.6	83.6	89.7	95.7	
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34	
MAX. UNSHORED ONE SPAN (ft)	17.4	16.7	16.1	15.5	15.0	14.5	14.1	13.7	
MAX. UNSHORED TWO SPAN (ft)	15.3	14.1	13.0	12.2	11.4	10.7	10.1	9.5	
MAX. UNSHORED THREE SPAN (ft)	17.4	16.0	14.8	13.8	12.9	12.1	11.5	10.8	
I _u (in⁴)	60.4	69.2	78.6	88.6	99.5	111.3	124	138	
I _c (in⁴)	29.0	32.6	36.4	40.4	44.8	49.4	54.3	59.5	
DEFLECTION PARAMETER (SLDP)	703	800	904	1015	1135	1264	1403	1553	
DEFLECTION PARAMETER (SWDP)	0.675	0.656	0.636	0.616	0.595	0.573	0.551	0.529	
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	
SHORING		SPAN (ft)		MAXIMUM NOMINAL LOAD (psf)					
To be established by the designer.	14.0	394	419	445	470	496	521	547	572
	14.5	364	388	411	435	458	482	505	529
	15.0	338	359	381	403	424	446	468	489
	15.5	314	334	354	374	394	414	434	454
	16.0	292	310	329	347	366	384	403	421
	16.5	272	289	306	323	341	358	375	392
	17.0	254	270	286	302	317	333	349	365
	17.5	237	252	267	282	296	311	326	340
	18.0	222	236	250	263	277	291	304	318
	18.5	208	221	234	246	259	272	284	297
	19.0	195	207	219	231	243	254	266	278
	19.5	183	194	205	216	227	238	249	260
	20.0	172	183	193	203	213	223	234	244
	20.5	162	172	181	191	200	210	219	229
	21.0	153	161	170	179	188	197	206	214
	21.5	144	152	160	168	177	185	193	201
	22.0	136	143	151	158	166	174	181	189
	22.5	128	135	142	149	156	163	170	178
	23.0	121	127	134	140	147	154	160	167
	23.5	114	120	126	132	138	145	151	157
24.0	107	113	119	125	130	136	142	147	
24.5	102	107	112	117	123	128	133	139	
25.0	96	101	106	111	116	120	125	130	
25.5	91	95	100	104	109	113	118	122	
26.0	86	90	94	98	102	107	111	115	
26.5	81	85	89	93	96	100	104	108	
27.0	77	80	84	87	91	94	98	101	
27.5	72	76	79	82	85	89	92	95	
28.0	68	71	74	77	80	83	86	89	
28.5	65	67	70	73	75	78	81	84	
29.0	61	63	66	68	71	73	76	78	



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

SLAB WEIGHT (psf)	52.9	58.9	65.0	71.0	77.1	83.1	89.2	95.2
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34
MAX. UNSHORED ONE SPAN (ft)	12.6	12.0	11.5	11.1	10.7	10.4	10.0	9.8
MAX. UNSHORED TWO SPAN (ft)	9.0	8.3	7.7	7.2	6.7	6.3	5.9	5.5
MAX. UNSHORED THREE SPAN (ft)	10.3	9.4	8.7	8.1	7.6	7.1	6.7	6.3
I _u (in⁴)	60.1	69.0	78.4	88.4	99.3	111.0	124	138
I _c (in⁴)	28.8	32.3	36.1	40.1	44.3	48.8	53.6	58.6
DEFLECTION PARAMETER (SLDP)	700	797	900	1011	1130	1258	1395	1543
DEFLECTION PARAMETER (SWDP)	0.672	0.652	0.633	0.613	0.592	0.571	0.549	0.528
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)						
To be established by the designer.	16.0	301	319	337	354	372	389	407
	16.5	281	297	314	330	346	362	379
	17.0	263	278	293	308	323	338	353
	17.5	246	259	273	287	301	315	329
	18.0	230	243	256	269	282	295	308
	18.5	216	228	240	252	264	276	288
	19.0	202	213	225	236	247	258	269
	19.5	190	200	211	221	231	242	252
	20.0	179	188	198	208	217	227	236
	20.5	168	177	186	195	204	213	222
	21.0	158	167	175	183	192	200	208
	21.5	149	157	165	172	180	188	196
	22.0	141	148	155	162	169	177	184
	22.5	133	139	146	153	159	166	173
	23.0	125	132	138	144	150	156	162
	23.5	118	124	130	136	141	147	153
	24.0	112	117	123	128	133	138	144
	24.5	106	111	116	121	125	130	135
	25.0	100	105	109	114	118	123	127
	25.5	95	99	103	107	111	116	120
	26.0	90	93	97	101	105	109	113
	26.5	85	88	92	95	99	102	106
	27.0	80	83	87	90	93	96	100
	27.5	76	79	82	85	88	91	94
	28.0	72	74	77	80	82	85	88
	28.5	68	70	73	75	78	80	82
	29.0	64	66	69	71	73	75	77
	29.5	61	63	65	67	69	71	73
	30.0	57	59	61	63	64	66	68
	30.5	54	56	57	59	60	62	64
	31.0	51	53	54	55	57	58	59
	31.5	48	50	51	52	53	54	55
	32.0	46	47	48	49	50	51	52
	32.5	43	44	45	46	47	48	49
	33.0	41	41	42	43	43	44	45


SLAB WEIGHT (psf)	53.3	59.3	65.4	71.4	77.5	83.5	89.6	95.6
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34
MAX. UNSHORED ONE SPAN (ft)	15.4	14.7	14.1	13.6	13.1	12.6	12.2	11.9
MAX. UNSHORED TWO SPAN (ft)	11.9	11.0	10.2	9.5	8.9	8.3	7.9	7.4
MAX. UNSHORED THREE SPAN (ft)	13.6	12.5	11.6	10.8	10.1	9.5	8.9	8.5
I _u (in⁴)	61.0	70.0	79.5	89.7	100.8	112.7	126	140
I _c (in⁴)	30.3	34.0	38.0	42.2	46.8	51.6	56.7	62.1
DEFLECTION PARAMETER (SLDP)	718	818	924	1038	1161	1292	1434	1587
DEFLECTION PARAMETER (SWDP)	0.667	0.647	0.627	0.607	0.586	0.565	0.544	0.522
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)						
To be established by the designer.	16.0	323	343	363	383	402	422	442
	16.5	301	320	338	357	375	393	412
	17.0	282	299	316	333	350	367	384
	17.5	264	279	295	311	327	343	359
	18.0	247	262	276	291	306	321	335
	18.5	232	245	259	273	286	300	314
	19.0	218	230	243	256	269	281	294
	19.5	204	216	228	240	252	264	276
	20.0	192	203	215	226	237	248	259
	20.5	181	192	202	212	222	233	243
	21.0	171	180	190	200	209	219	228
	21.5	161	170	179	188	197	206	215
	22.0	152	160	169	177	186	194	202
	22.5	144	151	159	167	175	183	190
	23.0	136	143	150	158	165	172	179
	23.5	128	135	142	149	155	162	169
	24.0	121	128	134	140	147	153	159
	24.5	115	121	127	132	138	144	150
	25.0	109	114	120	125	131	136	141
	25.5	103	108	113	118	123	128	133
	26.0	98	102	107	112	116	121	126
	26.5	92	97	101	105	110	114	118
	27.0	88	92	96	100	104	108	112
	27.5	83	87	90	94	98	102	105
	28.0	79	82	85	89	92	96	99
	28.5	74	78	81	84	87	90	93
	29.0	71	73	76	79	82	85	88
	29.5	67	69	72	75	77	80	83
	30.0	63	66	68	71	73	75	78
	30.5	60	62	64	66	69	71	73
	31.0	57	59	61	63	65	67	69
	31.5	54	55	57	59	61	62	64
	32.0	51	52	54	55	57	59	60
	32.5	48	49	51	52	54	55	56
	33.0	45	47	48	49	50	51	53

SLAB WEIGHT (psf)	53.7	59.7	65.8	71.8	77.9	83.9	89.9	96.0
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34
MAX. UNSHORED ONE SPAN (ft)	17.4	16.7	16.1	15.5	15.0	14.5	14.1	13.6
MAX. UNSHORED TWO SPAN (ft)	15.3	14.0	13.0	12.1	11.3	10.7	10.1	9.5
MAX. UNSHORED THREE SPAN (ft)	17.3	16.0	14.8	13.8	12.9	12.1	11.4	10.8
I _u (in⁴)	62.0	71.1	80.8	91.1	102.3	114.4	128	142
I _c (in⁴)	31.8	35.7	39.9	44.4	49.3	54.4	59.9	65.6
DEFLECTION PARAMETER (SLDP)	738	840	949	1067	1193	1328	1474	1631
DEFLECTION PARAMETER (SWDP)	0.661	0.641	0.621	0.601	0.580	0.559	0.538	0.517
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)						
To be established by the designer.	16.0	344	366	388	410	432	454	476
	16.5	321	342	362	382	403	423	444
	17.0	300	319	338	357	376	395	414
	17.5	281	299	316	334	352	369	387
	18.0	264	280	296	313	329	346	362
	18.5	247	263	278	293	309	324	339
	19.0	232	247	261	275	289	304	318
	19.5	219	232	245	259	272	285	299
	20.0	206	218	231	243	256	268	280
	20.5	194	206	217	229	240	252	264
	21.0	183	194	205	216	226	237	248
	21.5	173	183	193	203	213	223	234
	22.0	163	173	182	192	201	211	220
	22.5	154	163	172	181	190	199	207
	23.0	146	154	162	171	179	187	196
	23.5	138	146	153	161	169	177	185
	24.0	131	138	145	152	160	167	174
	24.5	124	130	137	144	151	158	164
	25.0	117	124	130	136	143	149	155
	25.5	111	117	123	129	135	141	147
	26.0	105	111	116	122	127	133	138
	26.5	100	105	110	115	120	126	131
	27.0	95	100	104	109	114	119	123
	27.5	90	94	99	103	108	112	117
	28.0	85	89	94	98	102	106	110
	28.5	81	85	89	92	96	100	104
	29.0	77	80	84	87	91	94	98
	29.5	73	76	79	83	86	89	92
	30.0	69	72	75	78	81	84	87
	30.5	66	68	71	74	77	79	82
	31.0	62	65	67	70	72	75	77
	31.5	59	61	64	66	68	70	73
	32.0	56	58	60	62	64	66	68
	32.5	53	55	57	59	60	62	64
	33.0	50	52	54	55	57	59	60

NOTES:

- The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
- The maximum unshored span conditions above establish the number of shores required.
- "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
- "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
- I_u is the uncracked moment of inertia based on equivalent steel.
- I_c is the cracked moment of inertia based on equivalent steel.
- An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 2: CS210 NWC - #7 Rebar

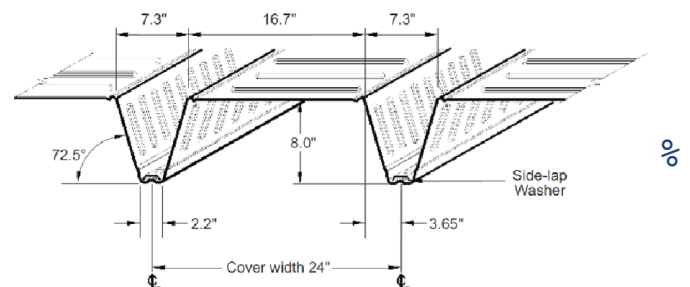



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

		IMPERIAL UNITS									
# 8 Rebar		Area of Steel Deck Included									
		Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	53.2	59.3	65.3	71.3	77.4	83.4	89.5	95.5			
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34			
MAX. UNSHORED ONE SPAN (ft)	12.6	12.0	11.5	11.1	10.7	10.4	10.0	9.8			
MAX. UNSHORED TWO SPAN (ft)	9.0	8.3	7.7	7.1	6.7	6.3	5.9	5.5			
MAX. UNSHORED THREE SPAN (ft)	10.2	9.4	8.7	8.1	7.6	7.1	6.7	6.3			
I _u (in⁴)	61.9	71.1	80.8	91.2	102.4	114.6	128	142			
I _c (in⁴)	31.9	35.9	40.1	44.6	49.4	54.5	59.9	65.5			
DEFLECTION PARAMETER (SLDP)	738	841	951	1069	1195	1330	1475	1631			
DEFLECTION PARAMETER (SWDP)	0.656	0.636	0.616	0.596	0.576	0.555	0.535	0.514			
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0			
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)									
To be established by the designer.	16.0	361	383	404	426	448	469	491	513		
	16.5	337	357	377	397	418	438	458	478		
	17.0	315	334	353	371	390	409	427	446		
	17.5	295	313	330	347	365	382	399	417		
	18.0	277	293	309	325	342	358	374	390		
	18.5	260	275	290	305	320	335	350	365		
	19.0	245	259	273	287	301	315	329	343		
	19.5	230	243	256	269	282	296	309	322		
	20.0	217	229	241	253	266	278	290	302		
	20.5	204	216	227	239	250	261	273	284		
	21.0	193	204	214	225	236	246	257	268		
	21.5	182	192	202	212	222	232	242	252		
	22.0	172	182	191	200	209	219	228	237		
	22.5	163	172	180	189	198	206	215	224		
	23.0	154	162	170	179	187	195	203	211		
	23.5	146	154	161	169	176	184	192	199		
	24.0	138	145	153	160	167	174	181	188		
	24.5	131	138	144	151	158	164	171	178		
	25.0	124	131	137	143	149	155	161	168		
	25.5	118	124	130	135	141	147	153	158		
	26.0	112	117	123	128	133	139	144	150		
	26.5	106	111	116	121	126	131	136	141		
	27.0	101	106	110	115	120	124	129	134		
	27.5	96	100	105	109	113	117	122	126		
	28.0	91	95	99	103	107	111	115	119		
	28.5	87	90	94	98	101	105	109	113		
	29.0	82	86	89	92	96	99	103	106		
	29.5	78	81	84	88	91	94	97	100		
	30.0	74	77	80	83	86	89	92	95		
	30.5	70	73	76	78	81	84	86	89		
	31.0	67	69	72	74	77	79	82	84		
	31.5	64	66	68	70	72	75	77	79		
	32.0	60	62	64	66	68	70	72	74		
	32.5	57	59	61	63	65	66	68	70		
	33.0	54	56	58	59	61	62	64	66		

		IMPERIAL UNITS									
# 8 Rebar		Area of Steel Deck Included									
		Normal Weight Concrete = 145 lb/ft³									
SLAB WEIGHT (psf)	53.6	59.7	65.7	71.7	77.8	83.8	89.9	95.9			
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34			
MAX. UNSHORED ONE SPAN (ft)	15.3	14.7	14.1	13.5	13.1	12.6	12.2	11.9			
MAX. UNSHORED TWO SPAN (ft)	11.9	11.0	10.2	9.5	8.9	8.3	7.8	7.4			
MAX. UNSHORED THREE SPAN (ft)	13.5	12.5	11.5	10.8	10.1	9.5	8.9	8.4			
I _u (in⁴)	62.7	72.0	81.9	92.5	103.9	116.1	129	144			
I _c (in⁴)	33.3	37.4	41.9	46.7	51.7	57.1	62.9	68.9			
DEFLECTION PARAMETER (SLDP)	755	861	974	1095	1224	1363	1513	1673			
DEFLECTION PARAMETER (SWDP)	0.652	0.632	0.612	0.592	0.571	0.550	0.530	0.509			
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0			
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)									
To be established by the designer.	16.0	382	406	430	454	478	502	526	549		
	16.5	357	379	401	424	446	468	490	512		
	17.0	334	355	375	396	417	437	458	478		
	17.5	313	332	351	371	390	409	428	447		
	18.0	294	312	329	347	365	383	401	419		
	18.5	276	293	309	326	343	359	376	393		
	19.0	259	275	291	306	322	337	353	369		
	19.5	244	259	273	288	303	317	332	346		
	20.0	230	244	257	271	285	298	312	326		
	20.5	217	230	243	255	268	281	294	307		
	21.0	205	217	229	241	253	265	277	289		
	21.5	194	205	216	227	239	250	261	272		
	22.0	183	194	204	215	225	236	246	257		
	22.5	173	183	193	203	213	223	232	242		
	23.0	164	173	183	192	201	210	220	229		
	23.5	156	164	173	182	190	199	207	216		
	24.0	148	156	164	172	180	188	196	204		
	24.5	140	148	155	163	170	178	185	193		
	25.0	133	140	147	154	161	168	175	183		
	25.5	126	133	139	146	153	159	166	173		
	26.0	119.d	126	132	138	145	151	157	163		
	26.5	113.d	120	125	131	137	143	149	155		
	27.0	107.d	114	119	124	130	135	141	146		
	27.5	101.d	108	113	118	123	128	133	138		
	28.0	96.d	102	107	112	117	121	126	131		
	28.5	91.d	97	102	106	111	115	119	124		
	29.0	86.d	93	97	101	105	109	113	117		
	29.5	82.d	88	92	96	99	103	107	111		
	30.0	78.d	84	87	91	94	98	101	105		
	30.5	74.d	79	83	86	89	92	96	99		
	31.0	70.d	75	78	81	84	88	91	94		
	31.5	67.d	72	74	77	80	83	86	88		
	32.0	64.d	68	71	73	76	78	81	83		
	32.5	61.d	65	67	69	72	74	76	79		
	33.0	58.d	61	63	66	68	70	72	74		

TABLE 2: CS210 NWC - #8 REBAR					IMPERIAL UNITS						
Base Steel Thickness = 0.0495"					Area of Steel Deck Included						
# 8 Rebar					Normal Weight Concrete = 145 lb/ft³						
SLAB WEIGHT (psf)	54.0	60.1	66.1	72.1	78.2	84.2	90.3	96.3			
CONCRETE VOLUME (yd³/100ft²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34			
MAX. UNSHORED ONE SPAN (ft)	17.4	16.7	16.1	15.5	15.0	14.5	14.0	13.6			
MAX. UNSHORED TWO SPAN (ft)	15.2	14.0	13.0	12.1	11.3	10.6	10.0	9.5			
MAX. UNSHORED THREE SPAN (ft)	17.3	15.9	14.7	13.7	12.9	12.1	11.4	10.8			
I _u (in⁴)	63.7	73.1	83.2	93.9	105.4	117.8	131	146			
I _c (in⁴)	34.7	39.1	43.7	48.8	54.1	59.8	65.9	72.3			
DEFLECTION PARAMETER (SLDP)	774	883	998	1122	1255	1398	1551	1716			
DEFLECTION PARAMETER (SWDP)	0.647	0.626	0.606	0.586	0.566	0.545	0.524	0.504			
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0			
SHORING		MAXIMUM NOMINAL LOAD (psf)									
To be established by the designer.	SPAN (ft)	16.0	403	429	455	481	507	533	559	585	
	16.5	376	400	425	449	473	497	522	546		
	17.0	352	375	397	420	442	465	487	510		
	17.5	330	351	372	393	414	435	456	477		
	18.0	310	329	349	369	388	408	427	447		
	18.5	291	309	328	346	364	383	401	419		
	19.0	274	291	308	325	342	360	377	394		
	19.5	258	274	290	306	322	338	354	370		
	20.0	243	258	273	288	303	318	333	348		
	20.5	230	244	258	272	286	300	314	328		
	21.0	217	230	243	256	270	283	296	309		
	21.5	205	217	230	242	255	267	279	292		
	22.0	194	206	217	229	240	252	264	275		
	22.5	184	195	205	216	227	238	249	260		
	23.0	174	184	195	205	215	225	236	246		
	23.5	165	175	184	194	204	213	223	232		
	24.0	156.d	166	175	184	193	202	211	220		
	24.5	146.d	157	166	174	183	191	200	208		
	25.0	138.d	149	157	165	173	181	189	197		
	25.5	130.d	141	149	157	164	172	179	187		
26.0	122.d	134	141	148	156	163	170	177			
26.5	116.d	128	134	141	148	154	161	167			
27.0	109.d	121	128	134	140	146	152	159			
27.5	103.d	115	121	127	133	139	144	150			
28.0	98.d	110	115	121	126	131	137	142			
28.5	93.d	104	109	115	120	125	130	135			
29.0	88.d	99	104	109	114	118	123	128			
29.5	84.d	94	99	103	108	112	117	121			
30.0	80.d	90	94	98	102	106	111	115			
30.5	76.d	85	89	93	97	101	105	109			
31.0	72.d	81	85	88	92	96	99	103			
31.5	69.d	77	81	84	87	91	94	97			
32.0	66.d	73	77	80	83	86	89	92			
32.5	63.d	70	73	76	78	81	84	87			
33.0	60.d	66	69	72	74	77	80	82			



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026


TABLE 2: CS210 NWC - #9 REBAR										
Base Steel Thickness = 0.0375"										
# 9 Rebar										
IMPERIAL UNITS										
Area of Steel Deck Included										
Normal Weight Concrete = 145 lb/ft ³										
SLAB WEIGHT (psf)	53.6	59.6	65.7	71.7	77.7	83.8	89.8	95.9		
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	12.5	12.0	11.5	11.1	10.7	10.3	10.0	9.7		
MAX. UNSHORED TWO SPAN (ft)	9.0	8.2	7.6	7.1	6.7	6.3	5.9	5.5		
MAX. UNSHORED THREE SPAN (ft)	10.2	9.4	8.7	8.1	7.6	7.1	6.7	6.3		
I _u (in ⁴)	63.7	73.3	83.5	94.3	105.9	118.4	132	147		
I _c (in ⁴)	35.2	39.6	44.4	49.5	54.9	60.6	66.7	73.1		
DEFLECTION PARAMETER (SLDP)	778	888	1006	1131	1265	1408	1562	1728		
DEFLECTION PARAMETER (SWDP)	0.641	0.620	0.600	0.580	0.560	0.540	0.519	0.499		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	18.0	330	350	370	390	409	429	449	469	
	18.5	310	329	347	366	384	403	422	440	
	19.0	292	309	327	344	361	379	396	414	
	19.5	275	292	308	324	340	356	373	389	
	20.0	260	275	290	305	321	336	351	366	
	20.5	245	260	274	288	302	317	331	345	
	21.0	232	245	259	272	285	299	312	325	
	21.5	217.d	232	244	257	270	282	295	307	
	22.0	203.d	219	231	243	255	267	278	290	
	22.5	190.d	208	219	230	241	252	263	274	
	23.0	178.d	197	207	218	228	239	249	259	
	23.5	167.d	187	197	206	216	226	236	245	
	24.0	156.d	177	186	196	205	214	223	232	
	24.5	147.d	168.d	177	186	194	203	211	220	
	25.0	138.d	158.d	168	176	184	192	200	208	
	25.5	130.d	149.d	160	167	175	182	190	198	
	26.0	123.d	140.d	152	159	166	173	180	187	
	26.5	116.d	133.d	144	151	157	164	171	178	
	27.0	110.d	125.d	137	143	150	156	162	168	
	27.5	104.d	119.d	130	136	142	148	154	160	
	28.0	98.d	112.d	124	129	135	141	146	152	
	28.5	93.d	107.d	118	123	128	133	139	144	
	29.0	89.d	101.d	112	117	122	127	132	136	
	29.5	84.d	96.d	107	111	116	120	125	129	
	30.0	80.d	91.d	102	106	110	114	119	123	
	30.5	76.d	87.d	97	101	105	109	113	116	
	31.0	73.d	83.d	92	96	99	103	107	110	
	31.5	69.d	79.d	88	91	94	98	101	105	
	32.0	66.d	75.d	83	87	90	93	96	99	
	32.5	63.d	72.d	79	82	85	88	91	94	
	33.0	60.d	69.d	75	78	81	84	86	89	
	33.5	57.d	66.d	72	74	77	79	82	84	
	34.0	55.d	63.d	68	70	73	75	77	80	
	34.5	53.d	60.d	65	67	69	71	73	75	
	35.0	50.d	58.d	62	63	65	67	69	71	

TABLE 2: CS210 NWC - #9 REBAR										
Base Steel Thickness = 0.0435"										
# 9 Rebar										
IMPERIAL UNITS										
Area of Steel Deck Included										
Normal Weight Concrete = 145 lb/ft ³										
SLAB WEIGHT (psf)	54.0	60.0	66.1	72.1	78.1	84.2	90.2	96.3		
CONCRETE VOLUME (yd ³ /100ft ²)	1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34		
MAX. UNSHORED ONE SPAN (ft)	15.3	14.7	14.1	13.5	13.0	12.6	12.2	11.9		
MAX. UNSHORED TWO SPAN (ft)	11.9	10.9	10.1	9.4	8.8	8.3	7.8	7.4		
MAX. UNSHORED THREE SPAN (ft)	13.5	12.4	11.5	10.7	10.0	9.4	8.9	8.4		
I _u (in ⁴)	64.6	74.3	84.6	95.5	107.3	120.0	134	148		
I _c (in ⁴)	36.5	41.1	46.1	51.4	57.1	63.1	69.5	76.3		
DEFLECTION PARAMETER (SLDP)	795	908	1028	1156	1293	1440	1598	1768		
DEFLECTION PARAMETER (SWDP)	0.637	0.616	0.596	0.576	0.556	0.535	0.515	0.495		
SLAB THICKNESS (in.)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0		
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)								
To be established by the designer.	18.0	346	368	389	411	433	454	476	497	
	18.5	325	346	366	386	406	427	447	467	
	19.0	306	325	344	363	382	401	420	439	
	19.5	289	307	324	342	360	378	395	413	
	20.0	273	289	306	323	339	356	373	389	
	20.5	256.d	273	289	304	320	336	351	367	
	21.0	238.d	258	273	288	302	317	332	346	
	21.5	222.d	244	258	272	286	299	313	327	
	22.0	207.d	231	244	257	270	283	296	309	
	22.5	194.d	219	231	244	256	268	280	292	
	23.0	182.d	207.d	219	231	242	254	265	277	
	23.5	170.d	194.d	208	219	230	240	251	262	
	24.0	160.d	182.d	197	207	218	228	238	248	
	24.5	150.d	171.d	187	197	207	216	226	235	
	25.0	141.d	161.d	178	187	196	205	214	223	
	25.5	133.d	152.d	169	178	186	195	203	212	
	26.0	126.d	143.d	161	169	177	185	193	201	
	26.5	119.d	136.d	153	160	168	176	183	191	
	27.0	112.d	128.d	145.d	153	160	167	174	181	
	27.5	106.d	121.d	137.d	145	152	158	165	172	
	28.0	101.d	115.d	130.d	138	144	151	157	163	
	28.5	95.d	109.d	123.d	131	137	143	149	155	
	29.0	91.d	103.d	117.d	125	131	136	142	147	
	29.5	86.d	98.d	111.d	119	124	129	135	140	
	30.0	82.d	93.d	106.d	113	118	123	128	133	
	30.5	78.d	89.d	101.d	108	112	117	122	126	
	31.0	74.d	85.d	96.d	103	107	111	116	120	
	31.5	71.d	81.d	91.d	98	102	106	110	114	
	32.0	67.d	77.d	87.d	93	97	101	104	108	
	32.5	64.d	73.d	83.d	89	92	96	99	103	
	33.0	61.d	70.d	79.d	84	88	91	94	97	
	33.5	59.d	67.d	76.d	80	83	86	89	92	
	34.0	56.d	64.d	73.d	76	79	82	85	87	
	34.5	54.d	61.d	70.d	73	75	78	80	83	
	35.0	52.d	59.d	67	69	71	74	76	78	

NOTES:

- The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
- The maximum unshored span conditions above establish the number of shores required.
- "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
- "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
- I_u is the uncracked moment of inertia based on equivalent steel.
- I_c is the cracked moment of inertia based on equivalent steel.
- An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 2: CS210 NWC - #9 Rebar

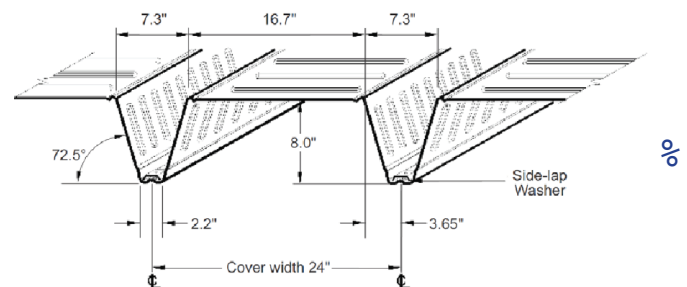



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

		IMPERIAL UNITS											
		Area of Steel Deck Included											
#11 Rebar		Normal Weight Concrete = 145 lb/ft³											
SLAB WEIGHT (psf)		54.5	60.6	66.6	72.7	78.7	84.7	90.8	96.8				
CONCRETE VOLUME (yd³/100ft²)		1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34				
MAX. UNSHORED ONE SPAN (ft)		12.5	11.9	11.4	11.0	10.6	10.3	10.0	9.7				
MAX. UNSHORED TWO SPAN (ft)		8.9	8.2	7.6	7.1	6.6	6.2	5.8	5.5				
MAX. UNSHORED THREE SPAN (ft)		10.1	9.3	8.6	8.0	7.5	7.1	6.6	6.2				
I _u (in⁴)		68.1	78.6	89.6	101.4	114.0	127.6	142	158				
I _c (in⁴)		42.5	48.2	54.2	60.7	67.5	74.9	82.6	90.8				
DEFLECTION PARAMETER (SLDP)		870	997	1132	1275	1428	1593	1768	1956				
DEFLECTION PARAMETER (SWDP)		0.611	0.588	0.567	0.546	0.526	0.507	0.487	0.468				
SLAB THICKNESS (in.)		10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0				
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)											
To be established by the designer.	18.0	414.d	475.d	520	549	579	609	638	668				
	18.5	382.d	437.d	490	517	545	573	601	628				
	19.0	352.d	404.d	458.d	488	514	540	566	592				
	19.5	326.d	373.d	424.d	460	485	509	534	558				
	20.0	302.d	346.d	393.d	435	458	481	504	527				
	20.5	280.d	321.d	365.d	411.d	433	455	477	498				
	21.0	261.d	299.d	339.d	382.d	410	430	451	471				
	21.5	243.d	279.d	316.d	356.d	388	408	427	446				
	22.0	227.d	260.d	295.d	333.d	368	386	405	423				
	22.5	212.d	243.d	276.d	311.d	348.d	367	384	401				
	23.0	199.d	228.d	258.d	291.d	326.d	348	365	381				
	23.5	186.d	213.d	242.d	273.d	306.d	331	346	362				
	24.0	175.d	200.d	227.d	256.d	287.d	315	329	344				
	24.5	164.d	188.d	214.d	241.d	270.d	299	313	327				
	25.0	155.d	177.d	201.d	227.d	254.d	283.d	298	311				
	25.5	146.d	167.d	190.d	214.d	239.d	267.d	284	296				
	26.0	137.d	158.d	179.d	202.d	226.d	252.d	270	282				
	26.5	130.d	149.d	169.d	190.d	213.d	238.d	258	269				
	27.0	123.d	141.d	160.d	180.d	202.d	225.d	246	257				
	27.5	116.d	133.d	151.d	170.d	191.d	213.d	235	245				
	28.0	110.d	126.d	143.d	161.d	181.d	202.d	224.d	233				
	28.5	104.d	120.d	136.d	153.d	171.d	191.d	212.d	223				
	29.0	99.d	114.d	129.d	145.d	163.d	181.d	201.d	213				
	29.5	94.d	108.d	122.d	138.d	155.d	172.d	191.d	203				
	30.0	89.d	103.d	116.d	131.d	147.d	164.d	182.d	194				
	30.5	85.d	98.d	111.d	125.d	140.d	156.d	173.d	185				
	31.0	81.d	93.d	106.d	119.d	133.d	148.d	165.d	177				
	31.5	77.d	89.d	101.d	113.d	127.d	142.d	157.d	169				
	32.0	74.d	84.d	96.d	108.d	121.d	135.d	150.d	162				
	32.5	70.d	81.d	92.d	103.d	116.d	129.d	143.d	155				
	33.0	67.d	77.d	87.d	99.d	110.d	123.d	137.d	148				
	33.5	64.d	74.d	84.d	94.d	106.d	118.d	131.d	141				
	34.0	61.d	70.d	80.d	90.d	101.d	113.d	125.d	135				
	34.5	59.d	67.d	77.d	86.d	97.d	108.d	120.d	129				
	35.0	56.d	65.d	73.d	83.d	93.d	103.d	115.d	123				
	35.5	54.d	62.d	70.d	79.d	89.d	99.d	110.d	118				
	36.0	52.d	59.d	67.d	76.d	85.d	95.d	105.d	113				

		IMPERIAL UNITS											
		Area of Steel Deck Included											
#11 Rebar		Normal Weight Concrete = 145 lb/ft³											
SLAB WEIGHT (psf)		55.3	61.4	67.4	73.5	79.5	85.5	91.6	97.6				
CONCRETE VOLUME (yd³/100ft²)		1.26	1.41	1.57	1.72	1.88	2.03	2.18	2.34				
MAX. UNSHORED ONE SPAN (ft)		17.3	16.6	16.0	15.4	14.9	14.4	14.0	13.6				
MAX. UNSHORED TWO SPAN (ft)		15.0	13.8	12.8	12.0	11.2	10.5	9.9	9.4				
MAX. UNSHORED THREE SPAN (ft)		17.0	15.7	14.6	13.6	12.7	12.0	11.3	10.7				
I _u (in⁴)		69.8	80.5	91.8	103.9	116.8	130.6	146	162				
I _c (in⁴)		44.9	50.9	57.3	64.2	71.5	79.4	87.7	96.5				
DEFLECTION PARAMETER (SLDP)		902	1033	1173	1322	1481	1652	1834	2030				
DEFLECTION PARAMETER (SWDP)		0.605	0.582	0.560	0.539	0.519	0.500	0.480	0.461				
SLAB THICKNESS (in.)		10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0				
SHORING	SPAN (ft)	MAXIMUM NOMINAL LOAD (psf)											
To be established by the designer.	18.0	430.d	492.d	556	589	622	655	688	721				
	18.5	396.d	453.d	515.d	554	585	617	648	679				
	19.0	365.d	419.d	475.d	523	552	581	610	640				
	19.5	338.d	387.d	439.d	493	521	548	576	604				
	20.0	313.d	359.d	407.d	459.d	492	518	544	570				
	20.5	291.d	333.d	378.d	426.d	466	490	515	539				
	21.0	271.d	310.d	352.d	396.d	441	464	487	510				
	21.5	252.d	289.d	328.d	369.d	414.d	440	462	483				
	22.0	235.d	270.d	306.d	345.d	386.d	417	438	458				
	22.5	220.d	252.d	286.d	322.d	361.d	396	416	435				
	23.0	206.d	236.d	268.d	302.d	338.d	376	395	413				
	23.5	193.d	221.d	251.d	283.d	317.d	354.d	375	393				
	24.0	181.d	208.d	236.d	266.d	298.d	332.d	357	374				
	24.5	170.d	195.d	222.d	250.d	280.d	312.d	340	356				
	25.0	160.d	184.d	209.d	235.d	263.d	294.d	324	339				
	25.5	151.d	173.d	196.d	221.d	248.d	277.d	307.d	323				
	26.0	143.d	163.d	185.d	209.d	234.d	261.d	290.d	307				
	26.5	135.d	154.d	175.d	197.d	221.d	247.d	274.d	293				
	27.0	127.d	146.d	166.d	187.d	209.d	233.d	259.d	280				
	27.5	121.d	138.d	157.d	177.d	198.d	221.d	245.d	267				
	28.0	114.d	131.d	148.d	167.d	187.d	209.d	232.d	255				
	28.5	108.d	124.d	141.d	159.d	178.d	198.d	220.d	244.d				
	29.0	103.d	118.d	134.d	151.d	169.d	188.d	209.d	231.d				
	29.5	98.d	112.d	127.d	143.d	160.d	179.d	198.d	220.d				
	30.0	93.d	106.d	121.d	136.d	152.d	170.d	189.d	209.d				
	30.5	88.d	101.d	115.d	129.d	145.d	162.d	180.d	199.d				
	31.0	84.d	96.d	109.d	123.d	138.d	154.d	171.d	189.d				
	31.5	80.d	92.d	104.d	117.d	132.d	147.d	163.d	180.d				
	32.0	76.d	88.d	99.d	112.d	126.d	140.d	156.d	172.d				
	32.5	73.d	84.d	95.d	107.d	120.d	134.d	148.d	164.d				
	33.0	70.d	80.d	91.d	102.d	114.d	128.d	142.d	157.d				
	33.5	67.d	76.d	87.d	98.d	109.d	122.d	136.d	150.d				
	34.0	64.d	73.d	83.d	93.d	105.d	117.d	130.d	143.d				
	34.5	61.d	70.d	79.d	89.d	100.d	112.d	124.d	137.d				
	35.0	58.d	67.d	76.d	86.d	96.d	107.d	119.d	131.d				
	35.5	56.d	64.d	73.d	82.d	92.d	103.d	114.d	126.d				
	36.0	54.d	62.d	70.d	79.d	88.d	98.d	109.d	121.d				

		IMPERIAL UNITS											
		Area of Steel Deck Included											
#11 Rebar		Normal Weight Concrete = 145 lb/ft³											
SLAB WEIGHT (psf)		54.9	61.0	67.0	73.1	79.1	85.1	91.2	97.2				



FIGURE 1 – ComSlab 210 Floor Deck




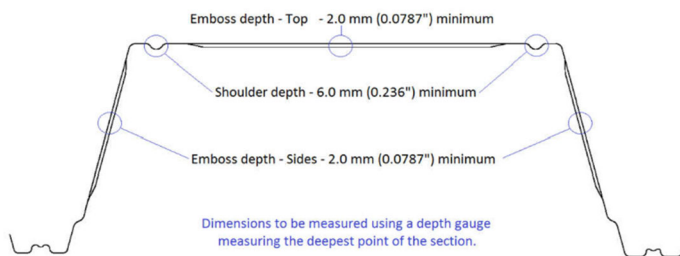


FIGURE 2 – ComSlab 120 Floor Deck

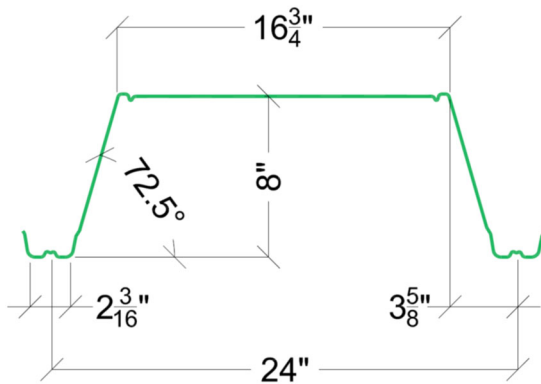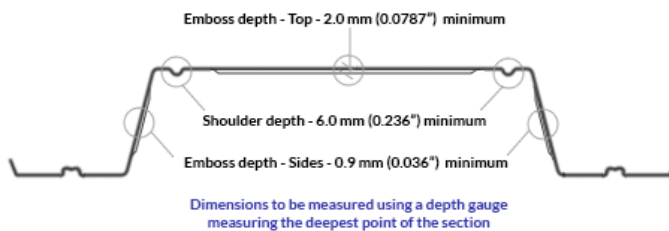

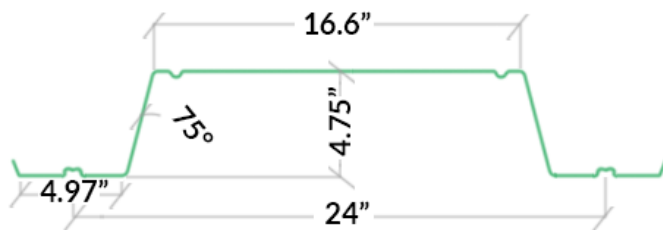

EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 3: CS120 LWC - #3 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 3	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	36.7	39.0	43.6	48.1	52.7	57.3	61.9
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.6	12.3	11.7	11.3	10.9	10.5	10.2
MAX. UNSHORED 2 SPAN (ft)	13.3	12.8	11.8	11.0	10.3	9.60	9.10
MAX. UNSHORED 3 SPAN (ft)	14.8	14.4	13.4	12.5	11.6	10.9	10.3
I _u in ⁴	22.5	24.7	29.6	35.1	41.4	48.6	56.6
I _c in ⁴	9.40	10.1	11.7	13.5	15.4	17.4	19.6
DEFL. PARAMETER (LLDP)	251	274	325	382	447	519	599
DEFL. PARAMETER (SWDP)	1.24	1.20	1.12	1.05	0.971	0.900	0.834
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	118	126	140	155	170	185
	15.0	99	106	118	131	143	156
	16.0	84	89	100	110	121	131
	17.0	71	76	85	94	103	112
	18.0	61	64	72	80	87	95
	19.0	52	55	61	68	74	81
	20.0	44	47	52	58	63	69
	21.0			44	49	54	58
	22.0				41	45	49
	23.0					41	45
	24.0						
	25.0						
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						


TABLE 3: CS120 LWC - #3 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 3	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.1	39.4	43.9	48.5	53.1	57.7	62.3
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	13.5	13.2	12.6	12.1	11.7	11.3	10.9
MAX. UNSHORED 2 SPAN (ft)	15.7	15.3	14.6	14.0	13.1	12.3	11.6
MAX. UNSHORED 3 SPAN (ft)	15.9	15.5	14.8	14.2	13.6	13.2	12.7
I _u in ⁴	22.9	25.1	30.0	35.6	42.0	49.2	57.4
I _c in ⁴	10.0	10.8	12.5	14.4	16.5	18.7	21.1
DEFL. PARAMETER (LLDP)	259	283	335	394	460	534	617
DEFL. PARAMETER (SWDP)	1.24	1.20	1.12	1.04	0.964	0.894	0.828
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	135	143	160	178	195	212
	15.0	114	121	135	150	165	179
	16.0	96	103	115	127	140	152
	17.0	82	88	98	109	119	130
	18.0	70	75	84	93	102	111
	19.0	60	64	72	80	88	95
	20.0	52	55	62	68	75	82
	21.0	44	47	53	59	65	70
	22.0		40	45	50	55	60
	23.0				43	47	51
	24.0					40	44
	25.0						
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						

TABLE 3: CS120 LWC - #3 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 3	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.4	39.7	44.3	48.9	53.5	58.1	62.7
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	14.4	14.1	13.4	12.9	12.4	12.0	11.6
MAX. UNSHORED 2 SPAN (ft)	16.5	16.2	15.5	14.9	14.3	13.8	13.4
MAX. UNSHORED 3 SPAN (ft)	16.7	16.4	15.7	15.1	14.5	14.0	13.5
I _u in ⁴	23.3	25.6	30.6	36.3	42.7	50.0	58.2
I _c in ⁴	10.7	11.5	13.4	15.4	17.7	20.1	22.6
DEFL. PARAMETER (LLDP)	267	292	346	407	475	551	636
DEFL. PARAMETER (SWDP)	1.23	1.19	1.11	1.03	0.955	0.886	0.821
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	151	160	180	200	219	239
	15.0	128	136	153	169	186	203
	16.0	109	116	130	144	159	173
	17.0	93	99	111	124	136	148
	18.0	80	85	96	106	117	127
	19.0	69	73	83	92	101	110
	20.0	59	63	71	79	87	95
	21.0	51	55	62	68	75	82
	22.0	44	47	53	59	65	71
	23.0		41	46	51	56	61
	24.0				44	48	53
	25.0					41	45
	26.0						42
	27.0						
	28.0						
	29.0						
	30.0						

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 3: CS120 LWC - #3 Rebar

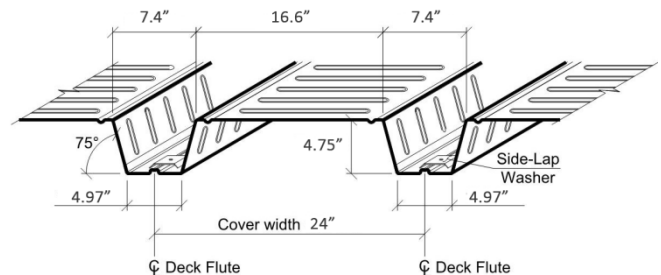



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 3: CS120 LWC - #4 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 4	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	36.8	39.1	43.7	48.3	52.9	57.5	62.0
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.6	12.3	11.7	11.3	10.9	10.5	10.2
MAX. UNSHORED 2 SPAN (ft)	13.3	12.8	11.8	11.0	10.2	9.60	9.00
MAX. UNSHORED 3 SPAN (ft)	14.7	14.4	13.4	12.4	11.6	10.9	10.3
I_u in ⁴	22.8	25.1	30.0	35.6	42.0	49.3	57.4
I_e in ⁴	10.0	10.8	12.6	14.5	16.5	18.8	21.2
DEFL. PARAMETER (LLDP)	258	282	335	394	461	535	618
DEFL. PARAMETER (SWDP)	1.23	1.19	1.11	1.03	0.960	0.890	0.824
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	142	151	168	185	202	220
	15.0	120	127	142	157	171	186
	16.0	102	108	121	133	146	158
	17.0	87	93	103	114	125	135
	18.0	75	79	89	98	107	116
	19.0	64	68	76	84	92	100
	20.0	55	59	66	72	79	86
	21.0	48	51	56	62	68	74
	22.0	41	44	48	53	58	63
	23.0			42	46	50	54
	24.0					43	46
	25.0						42
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						


TABLE 3: CS120 LWC - #4 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 4	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.2	39.5	44.1	48.7	53.3	57.8	62.4
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	13.5	13.2	12.6	12.1	11.7	11.3	10.9
MAX. UNSHORED 2 SPAN (ft)	15.7	15.3	14.6	14.0	13.1	12.3	11.6
MAX. UNSHORED 3 SPAN (ft)	15.8	15.4	14.8	14.2	13.6	13.2	12.7
I_u in ⁴	23.2	25.5	30.5	36.2	42.6	49.9	58.2
I_e in ⁴	10.6	11.5	13.3	15.4	17.6	20.0	22.6
DEFL. PARAMETER (LLDP)	266	290	344	405	474	550	635
DEFL. PARAMETER (SWDP)	1.23	1.18	1.10	1.03	0.953	0.884	0.819
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	158	168	188	207	227	247
	15.0	134	142	159	176	193	209
	16.0	114	122	136	150	164	179
	17.0	98	104	117	129	141	153
	18.0	85	90	100	111	122	132
	19.0	73	78	87	96	105	114
	20.0	63	67	75	83	91	99
	21.0	55	58	65	72	79	86
	22.0	47	50	56	62	68	74
	23.0	41	44	49	54	59	64
	24.0			42	46	51	55
	25.0					44	48
	26.0						41
	27.0						
	28.0						
	29.0						
	30.0						

TABLE 3: CS120 LWC - #4 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 4	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.6	39.9	44.5	49.1	53.6	58.2	62.8
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	14.4	14.0	13.4	12.9	12.4	12.0	11.6
MAX. UNSHORED 2 SPAN (ft)	16.5	16.2	15.5	14.9	14.3	13.8	13.4
MAX. UNSHORED 3 SPAN (ft)	16.7	16.4	15.7	15.1	14.5	14.0	13.5
I_u in ⁴	23.6	25.9	31.0	36.8	43.3	50.7	59.0
I_e in ⁴	11.3	12.2	14.2	16.4	18.8	21.4	24.2
DEFL. PARAMETER (LLDP)	274	300	355	418	488	567	654
DEFL. PARAMETER (SWDP)	1.22	1.17	1.09	1.02	0.945	0.876	0.812
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	174	185	207	229	251	273
	15.0	148	157	176	195	214	233
	16.0	126	135	151	167	183	199
	17.0	109	116	130	144	157	171
	18.0	94	100	112	124	136	148
	19.0	81	87	97	108	118	129
	20.0	71	75	84	94	103	112
	21.0	62	66	73	81	89	97
	22.0	54	57	64	71	78	85
	23.0	47	50	56	62	68	74
	24.0	41	43	48	54	59	64
	25.0			42	47	51	56
	26.0				40	44	48
	27.0						42
	28.0						
	29.0						
	30.0						

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_e is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 3: CS120 LWC - #4 Rebar

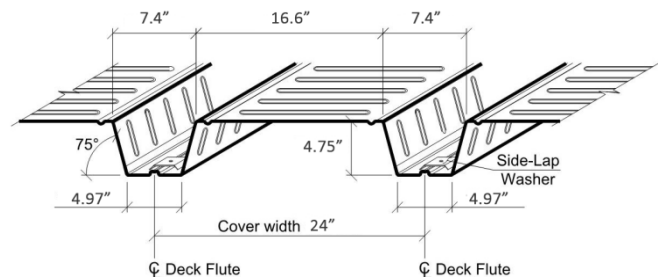



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 3: CS120 LWC - #5 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 5	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.0	39.3	43.9	48.5	53.1	57.6	62.2
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.5	12.2	11.7	11.2	10.8	10.5	10.1
MAX. UNSHORED 2 SPAN (ft)	13.3	12.7	11.8	10.9	10.2	9.60	9.00
MAX. UNSHORED 3 SPAN (ft)	14.7	14.4	13.4	12.4	11.6	10.9	10.3
I_u in ⁴	23.2	25.5	30.5	36.2	42.7	50.1	58.4
I_c in ⁴	10.7	11.6	13.5	15.7	18.0	20.4	23.1
DEFL. PARAMETER (LLDP)	267	292	347	408	478	555	641
DEFL. PARAMETER (SWDP)	1.22	1.18	1.10	1.02	0.947	0.878	0.813
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	171	182	202	223	243	264
	15.0	146	154	172	189	207	224
	16.0	125	132	147	162	177	192
	17.0	107	114	126	139	152	165
	18.0	93	98	109	120	131	142
	19.0	80	85	95	104	114	123
	20.0	70	74	82	91	99	107
	21.0	61	64	72	79	86	93
	22.0	53	56	62	69	75	81
	23.0	46	49	54	60	65	70
	24.0	40	42	47	52	56	61
	25.0			41	45	49	53
	26.0				42	46	49
	27.0						42
	28.0						
	29.0						
	30.0						


TABLE 3: CS120 LWC - #5 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 5	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.4	39.7	44.3	48.9	53.4	58.0	62.6
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	13.5	13.2	12.6	12.1	11.6	11.2	10.9
MAX. UNSHORED 2 SPAN (ft)	15.6	15.2	14.6	14.0	13.1	12.3	11.6
MAX. UNSHORED 3 SPAN (ft)	15.8	15.4	14.7	14.1	13.6	13.1	12.7
I_u in ⁴	23.5	25.8	31.0	36.8	43.3	50.8	59.1
I_c in ⁴	11.3	12.2	14.3	16.5	19.0	21.6	24.5
DEFL. PARAMETER (LLDP)	274	300	356	419	490	569	658
DEFL. PARAMETER (SWDP)	1.21	1.17	1.09	1.01	0.941	0.872	0.808
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	187	199	221	244	267	290
	15.0	159	169	189	208	228	247
	16.0	137	145	162	178	195	212
	17.0	118	125	140	154	168	183
	18.0	102	108	121	133	146	158
	19.0	89	94	105	116	127	138
	20.0	77	82	92	101	111	120
	21.0	68	72	80	88	97	105
	22.0	59	63	70	77	84	92
	23.0	52	55	61	67	74	80
	24.0	45	48	53	59	64	70
	25.0		42	47	51	56	61
	26.0			41	45	49	53
	27.0					43	46
	28.0						43
	29.0						
	30.0						

TABLE 3: CS120 LWC - #5 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 5	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.8	40.1	44.7	49.2	53.8	58.4	63.0
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	14.4	14.0	13.4	12.9	12.4	12.0	11.6
MAX. UNSHORED 2 SPAN (ft)	16.5	16.2	15.5	14.9	14.3	13.8	13.4
MAX. UNSHORED 3 SPAN (ft)	16.7	16.3	15.7	15.0	14.5	14.0	13.5
I_u in ⁴	24.0	26.3	31.5	37.4	44.0	51.5	60.0
I_c in ⁴	11.9	12.9	15.1	17.5	20.1	22.9	26.0
DEFL. PARAMETER (LLDP)	282	309	366	431	504	586	676
DEFL. PARAMETER (SWDP)	1.20	1.16	1.08	1.01	0.933	0.865	0.801
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	203	215	240	266	291	316
	15.0	173	184	205	227	248	270
	16.0	148	158	176	195	213	232
	17.0	128	136	152	168	184	201
	18.0	111	118	132	146	160	174
	19.0	97	103	115	127	140	152
	20.0	85	90	101	111	122	133
	21.0	74	79	88	98	107	116
	22.0	65	69	77	86	94	102
	23.0	57	61	68	75	82	90
	24.0	50	53	60	66	72	79
	25.0	44	47	52	58	64	69
	26.0		41	46	51	56	61
	27.0			40	44	49	53
	28.0					43	46
	29.0						40
	30.0						

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 3: CS120 LWC - #5 Rebar

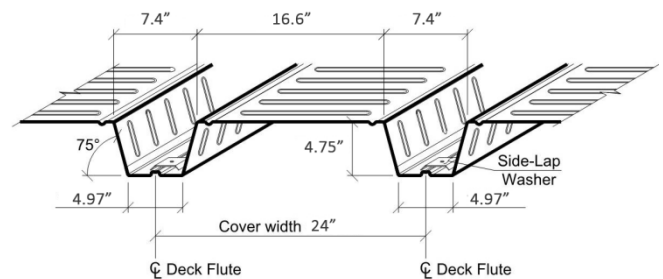



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 3: CS120 LWC - #6 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 6	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.3	39.5	44.1	48.7	53.3	57.9	62.5
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.5	12.2	11.7	11.2	10.8	10.5	10.1
MAX. UNSHORED 2 SPAN (ft)	13.2	12.7	11.7	10.9	10.2	9.60	9.00
MAX. UNSHORED 3 SPAN (ft)	14.7	14.3	13.3	12.4	11.6	10.9	10.2
I _u in ⁴	23.6	25.9	31.1	36.9	43.6	51.1	59.5
I _c in ⁴	11.5	12.5	14.6	17.0	19.5	22.3	25.3
DEFL. PARAMETER (LLDP)	276	302	360	424	497	577	667
DEFL. PARAMETER (SWDP)	1.21	1.16	1.08	1.01	0.933	0.864	0.801
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	206	218	243	267	291	316
	15.0	176	186	207	228	249	269
	16.0	151	160	178	196	214	232
	17.0	131	138	154	169	185	200
	18.0	114	120	134	147	160	174
	19.0	99	105	117	128	140	152
	20.0	87	92	102	112	122	133
	21.0	76	81	89	98	107	116
	22.0	67	71	79	86	94	102
	23.0	59	62	69	76	83	90
	24.0	52	55	61	67	73	79
	25.0	45	48	53	59	64	69
	26.0		42	47	51	56	61
	27.0			41	45	49	53
	28.0				43	46	50
	29.0					40	43
	30.0						


TABLE 3: CS120 LWC - #6 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 6	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.6	39.9	44.5	49.1	53.7	58.3	62.8
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	13.5	13.1	12.6	12.1	11.6	11.2	10.9
MAX. UNSHORED 2 SPAN (ft)	15.6	15.2	14.5	14.0	13.1	12.3	11.6
MAX. UNSHORED 3 SPAN (ft)	15.8	15.4	14.7	14.1	13.6	13.1	12.7
I _u in ⁴	23.9	26.3	31.5	37.4	44.1	51.7	60.2
I _c in ⁴	12.0	13.1	15.3	17.8	20.5	23.5	26.6
DEFL. PARAMETER (LLDP)	283	310	369	435	509	591	683
DEFL. PARAMETER (SWDP)	1.20	1.16	1.08	1.00	0.927	0.859	0.796
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	221	235	261	288	315	342
	15.0	189	201	223	246	269	292
	16.0	163	173	192	212	232	251
	17.0	141	150	167	184	201	218
	18.0	123	130	145	160	175	189
	19.0	107	114	127	140	153	166
	20.0	94	100	111	122	134	145
	21.0	83	88	98	108	118	128
	22.0	73	77	86	95	104	112
	23.0	64	68	76	84	91	99
	24.0	57	60	67	74	81	87
	25.0	50	53	59	65	71	77
	26.0	44	47	52	57	63	68
	27.0		41	46	51	55	60
	28.0			40	44	49	53
	29.0					43	46
	30.0					40	43

TABLE 3: CS120 LWC - #6 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 6	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	38.0	40.3	44.9	49.5	54.1	58.6	63.2
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	14.3	14.0	13.4	12.8	12.4	11.9	11.6
MAX. UNSHORED 2 SPAN (ft)	16.5	16.1	15.5	14.8	14.3	13.8	13.4
MAX. UNSHORED 3 SPAN (ft)	16.6	16.3	15.6	15.0	14.4	13.9	13.5
I _u in ⁴	24.3	26.7	32.0	38.0	44.8	52.5	61.1
I _c in ⁴	12.7	13.8	16.1	18.8	21.6	24.7	28.1
DEFL. PARAMETER (LLDP)	291	319	379	447	523	607	701
DEFL. PARAMETER (SWDP)	1.19	1.15	1.07	0.992	0.920	0.853	0.790
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	236	251	280	309	338	368
	15.0	202	215	240	265	290	315
	16.0	174	185	206	228	250	271
	17.0	151	160	179	198	216	235
	18.0	132	140	156	172	189	205
	19.0	115	122	137	151	165	179
	20.0	101.d	107	120	133	145	158
	21.0	87.d	95	106	117	128	139
	22.0	76.d	83.d	93	103	113	123
	23.0	66.d	73.d	83	91	100	109
	24.0	58.d	64.d	73	81	88	96
	25.0	52.d	57.d	65	71	78	85
	26.0	46.d	50.d	57	63	69	75
	27.0	41.d	45.d	51	56	61	67
	28.0		40	45	49	54	59
	29.0				44	48	52
	30.0					42	46

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 3: CS120 LWC - #6 Rebar

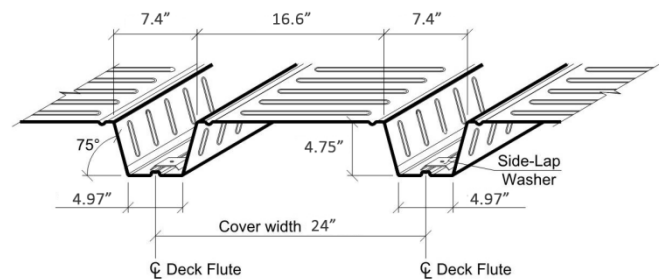



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

Rebar # 7	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.5	39.8	44.4	49.0	53.6	58.1	62.7
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.5	12.2	11.7	11.2	10.8	10.4	10.1
MAX. UNSHORED 2 SPAN (ft)	13.2	12.6	11.7	10.9	10.2	9.50	9.00
MAX. UNSHORED 3 SPAN (ft)	14.7	14.3	13.3	12.4	11.5	10.8	10.2
I _u in ⁴	24.0	26.4	31.7	37.7	44.5	52.1	60.7
I _c in ⁴	12.3	13.4	15.8	18.4	21.3	24.4	27.7
DEFL. PARAMETER (LLDP)	286	313	374	441	517	602	696
DEFL. PARAMETER (SWDP)	1.19	1.15	1.07	0.991	0.919	0.851	0.788
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	245	260	289	318	346	375
	15.0	210	222	247	272	297	321
	16.0	181	192	213	234	256	277
	17.0	157	166	185	204	222	241
	18.0	136.d	145	161	178	194	210
	19.0	116.d	127.d	141	156	170	184
	20.0	99.d	109.d	124	137	149	162
	21.0	86.d	94.d	110	121	132	143
	22.0	75.d	82.d	97	107	116	126
	23.0	65.d	72.d	85.d	95	103	112
	24.0	57.d	63.d	75.d	84	91	99
	25.0	51.d	56.d	66.d	74	81	88
	26.0	45.d	50.d	59.d	66	72	78
	27.0	40.d	44.d	53.d	59	64	69
	28.0			47	52	56	61
	29.0			42	46	50	54
	30.0				40	44	48


Rebar # 7	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.9	40.2	44.8	49.4	53.9	58.5	63.1
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	13.4	13.1	12.5	12.0	11.6	11.2	10.9
MAX. UNSHORED 2 SPAN (ft)	15.6	15.2	14.5	13.9	13.0	12.2	11.5
MAX. UNSHORED 3 SPAN (ft)	15.7	15.4	14.7	14.1	13.6	13.1	12.7
I _u in ⁴	24.3	26.8	32.1	38.2	45.0	52.8	61.4
I _c in ⁴	12.8	14.0	16.5	19.2	22.2	25.5	29.0
DEFL. PARAMETER (LLDP)	292	321	382	451	529	615	711
DEFL. PARAMETER (SWDP)	1.19	1.15	1.06	0.986	0.914	0.846	0.783
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	260	276	307	338	370	401
	15.0	223	236	263	290	317	344
	16.0	192	204	227	250	273	297
	17.0	165.d	177	197	217	238	258
	18.0	139.d	153.d	172	190	208	225
	19.0	118.d	130.d	151	167	182	198
	20.0	102.d	111.d	133.d	147	160	174
	21.0	88.d	96.d	115.d	130	142	154
	22.0	76.d	84.d	100.d	115	126	136
	23.0	67.d	73.d	87.d	102	111	121
	24.0	59.d	64.d	77.d	91	99	107
	25.0	52.d	57.d	68.d	80.d	88	96
	26.0	46.d	51.d	60.d	71.d	78	85
	27.0	41.d	45.d	54.d	64.d	70	76
	28.0		41.d	48.d	57	62	67
	29.0			44.d	50	55	60
	30.0				45	49	53

Rebar # 7	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	38.3	40.6	45.2	49.7	54.3	58.9	63.5
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	14.3	14.0	13.4	12.8	12.3	11.9	11.6
MAX. UNSHORED 2 SPAN (ft)	16.4	16.1	15.4	14.8	14.3	13.8	13.3
MAX. UNSHORED 3 SPAN (ft)	16.6	16.3	15.6	15.0	14.4	13.9	13.5
I _u in ⁴	24.7	27.2	32.6	38.8	45.7	53.5	62.3
I _c in ⁴	13.4	14.6	17.2	20.1	23.2	26.7	30.3
DEFL. PARAMETER (LLDP)	300	329	392	463	542	631	729
DEFL. PARAMETER (SWDP)	1.18	1.14	1.06	0.979	0.907	0.840	0.778
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	274	291	325	359	392	426
	15.0	235	250	279	308	337	366
	16.0	203	216	241	266	291	316
	17.0	170.d	186.d	209	231	253	275
	18.0	143.d	157.d	183	202	221	240
	19.0	122.d	133.d	159.d	178	194	211
	20.0	104.d	114.d	136.d	157	171	186
	21.0	90.d	99.d	118.d	139	152	165
	22.0	78.d	86.d	102.d	121	135	146
	23.0	69.d	75.d	90.d	106.d	120	130
	24.0	60.d	66.d	79.d	93.d	107	116
	25.0	53.d	59.d	70.d	82.d	95	103
	26.0	47.d	52.d	62.d	73.d	85	92
	27.0	42.d	46.d	55.d	65.d	76	82
	28.0		42.d	50.d	59.d	68	73
	29.0			45.d	53.d	60	65
	30.0			40.d	48.d	54	58

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 3: CS120 LWC - #7 Rebar

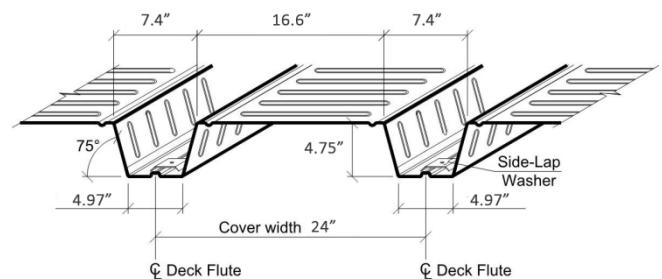



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 3: CS120 LWC - #8 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 8	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	37.8	40.1	44.7	49.3	53.9	58.5	63.0
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.5	12.2	11.6	11.2	10.8	10.4	10.1
MAX. UNSHORED 2 SPAN (ft)	13.1	12.6	11.6	10.8	10.1	9.50	9.00
MAX. UNSHORED 3 SPAN (ft)	14.6	14.3	13.2	12.3	11.5	10.8	10.2
I _u in ⁴	24.4	26.9	32.3	38.5	45.4	53.3	62.1
I _c in ⁴	13.2	14.4	17.0	19.9	23.1	26.5	30.2
DEFL. PARAMETER (LLDP)	296	325	388	459	539	628	726
DEFL. PARAMETER (SWDP)	1.18	1.14	1.06	0.977	0.904	0.837	0.775
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	288	305	339	374	408	442
	15.0	243.d	262	291	321	350	379
	16.0	200.d	220.d	252	277	303	328
	17.0	167.d	184.d	219	241	264	286
	18.0	141.d	155.d	185.d	211	231	250
	19.0	120.d	131.d	157.d	186	203	220
	20.0	103.d	113.d	135.d	159.d	179	194
	21.0	89.d	97.d	116.d	138.d	159	172
	22.0	77.d	85.d	101.d	120.d	141.d	153
	23.0	67.d	74.d	89.d	105.d	123.d	136
	24.0	59.d	65.d	78.d	92.d	108.d	121
	25.0	53.d	58.d	69.d	82.d	96.d	109
	26.0	47.d	51.d	61.d	73.d	85.d	97
	27.0	42.d	46.d	55.d	65.d	76.d	87
	28.0		41.d	49.d	58.d	68.d	78
	29.0			44.d	52.d	61.d	69
	30.0				47.d	55.d	62


TABLE 3: CS120 LWC - #8 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 8	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	38.2	40.5	45.1	49.7	54.3	58.8	63.4
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	13.4	13.1	12.5	12.0	11.6	11.2	10.8
MAX. UNSHORED 2 SPAN (ft)	15.5	15.2	14.5	13.9	13.0	12.2	11.5
MAX. UNSHORED 3 SPAN (ft)	15.7	15.3	14.7	14.1	13.5	13.1	12.7
I _u in ⁴	24.7	27.2	32.7	39.0	46.0	53.9	62.8
I _c in ⁴	13.7	14.9	17.7	20.7	24.0	27.6	31.4
DEFL. PARAMETER (LLDP)	302	332	396	469	550	641	741
DEFL. PARAMETER (SWDP)	1.18	1.13	1.05	0.972	0.900	0.833	0.771
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	302	320	357	394	430	467
	15.0	249.d	273.d	307	338	370	401
	16.0	205.d	225.d	265	293	320	347
	17.0	171.d	188.d	224.d	255	279	302
	18.0	144.d	158.d	189.d	223	244	265
	19.0	122.d	134.d	161.d	190.d	215	233
	20.0	105.d	115.d	138.d	163.d	190	206
	21.0	91.d	99.d	119.d	141.d	165.d	183
	22.0	79.d	87.d	103.d	122.d	144.d	163
	23.0	69.d	76.d	91.d	107.d	126.d	145
	24.0	61.d	67.d	80.d	94.d	111.d	129
	25.0	54.d	59.d	70.d	83.d	98.d	114
	26.0	48.d	52.d	63.d	74.d	87.d	101
	27.0	43.d	47.d	56.d	66.d	78.d	90
	28.0		42.d	50.d	59.d	70.d	81
	29.0			45.d	53.d	63.d	73
	30.0			41.d	48.d	57.d	66

TABLE 3: CS120 LWC - #8 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 8	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	38.6	40.9	45.5	50.1	54.6	59.2	63.8
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	14.3	13.9	13.3	12.8	12.3	11.9	11.5
MAX. UNSHORED 2 SPAN (ft)	16.4	16.1	15.4	14.8	14.2	13.8	13.3
MAX. UNSHORED 3 SPAN (ft)	16.6	16.2	15.6	15.0	14.4	13.9	13.5
I _u in ⁴	25.1	27.7	33.2	39.5	46.6	54.6	63.6
I _c in ⁴	14.2	15.5	18.4	21.5	25.0	28.7	32.8
DEFL. PARAMETER (LLDP)	310	340	406	480	563	656	758
DEFL. PARAMETER (SWDP)	1.17	1.13	1.04	0.966	0.894	0.827	0.765
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	314.d	335	374	413	452	491
	15.0	255.d	280.d	322	355	389	422
	16.0	210.d	231.d	275.d	308	337	366
	17.0	175.d	192.d	230.d	268	294	319
	18.0	148.d	162.d	193.d	229.d	257	280
	19.0	125.d	138.d	164.d	195.d	227	247
	20.0	108.d	118.d	141.d	167.d	196.d	218
	21.0	93.d	102.d	122.d	144.d	169.d	194
	22.0	81.d	89.d	106.d	125.d	147.d	171
	23.0	71.d	78.d	93.d	110.d	129.d	150
	24.0	62.d	68.d	82.d	97.d	113.d	132
	25.0	55.d	60.d	72.d	85.d	100.d	117
	26.0	49.d	54.d	64.d	76.d	89.d	104
	27.0	44.d	48.d	57.d	68.d	79.d	93
	28.0		43.d	51.d	61.d	71.d	83
	29.0			46.d	55.d	64.d	75
	30.0			42.d	49.d	58.d	67

NOTES:

- The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
- The maximum unshored span conditions above establish the number of shores required.
- "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
- "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
- I_u is the uncracked moment of inertia based on equivalent steel.
- I_c is the cracked moment of inertia based on equivalent steel.
- An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 3: CS120 LWC - #8 Rebar

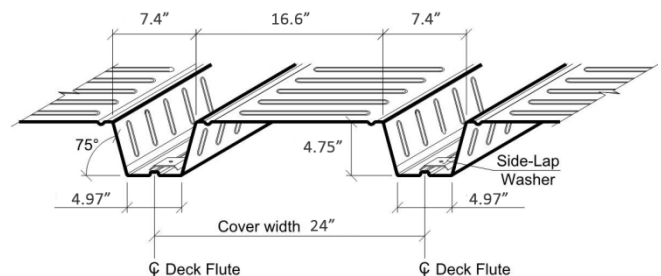



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 9	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	38.2	40.5	45.1	49.7	54.2	58.8	63.4
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.4	12.1	11.6	11.2	10.8	10.4	10.1
MAX. UNSHORED 2 SPAN (ft)	13.0	12.5	11.6	10.8	10.1	9.50	8.90
MAX. UNSHORED 3 SPAN (ft)	14.6	14.2	13.2	12.3	11.5	10.8	10.1
I _u in ⁴	24.8	27.4	33.0	39.3	46.4	54.5	63.5
I _c in ⁴	14.0	15.4	18.3	21.5	25.0	28.8	32.9
DEFL. PARAMETER (LLDP)	306	336	403	478	562	655	758
DEFL. PARAMETER (SWDP)	1.17	1.13	1.04	0.963	0.891	0.824	0.762
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	309.d	340.d	395	436	476	516
	15.0	252.d	277.d	332.d	375	409	444
	16.0	207.d	228.d	273.d	324.d	355	385
	17.0	173.d	190.d	228.d	270.d	310	336
	18.0	146.d	160.d	192.d	228.d	268.d	295
	19.0	124.d	136.d	163.d	194.d	228.d	260
	20.0	106.d	117.d	140.d	166.d	195.d	227.d
	21.0	92.d	101.d	121.d	143.d	169.d	196.d
	22.0	80.d	88.d	105.d	125.d	147.d	171.d
	23.0	70.d	77.d	92.d	109.d	128.d	150.d
	24.0	61.d	68.d	81.d	96.d	113.d	132.d
	25.0	54.d	60.d	72.d	85.d	100.d	116.d
	26.0	48.d	53.d	64.d	76.d	89.d	104.d
	27.0	43.d	47.d	57.d	67.d	79.d	92.d
	28.0		43.d	51.d	60.d	71.d	83.d
	29.0			46.d	54.d	64.d	75.d
	30.0			41.d	49.d	58.d	67.d


IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 9	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	39.0	41.3	45.8	50.4	55.0	59.6	64.2
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	14.2	13.9	13.3	12.8	12.3	11.9	11.5
MAX. UNSHORED 2 SPAN (ft)	16.4	16.0	15.4	14.8	14.2	13.7	13.3
MAX. UNSHORED 3 SPAN (ft)	16.5	16.2	15.5	14.9	14.4	13.9	13.4
I _u in ⁴	25.6	28.2	33.9	40.3	47.6	55.8	65.0
I _c in ⁴	15.1	16.5	19.6	23.0	26.8	30.9	35.3
DEFL. PARAMETER (LLDP)	320	351	421	498	585	682	789
DEFL. PARAMETER (SWDP)	1.16	1.12	1.03	0.953	0.881	0.814	0.753
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	323.d	356.d	426.d	474	519	564
	15.0	263.d	289.d	346.d	408	447	486
	16.0	217.d	238.d	285.d	338.d	388	422
	17.0	181.d	199.d	238.d	282.d	331.d	368
	18.0	152.d	167.d	200.d	237.d	279.d	324
	19.0	129.d	142.d	170.d	202.d	237.d	276.d
	20.0	111.d	122.d	146.d	173.d	203.d	237.d
	21.0	96.d	105.d	126.d	149.d	176.d	205.d
	22.0	83.d	92.d	110.d	130.d	153.d	178.d
	23.0	73.d	80.d	96.d	114.d	134.d	156.d
	24.0	64.d	71.d	85.d	100.d	118.d	137.d
	25.0	57.d	62.d	75.d	89.d	104.d	121.d
	26.0	51.d	56.d	66.d	79.d	92.d	108.d
	27.0	45.d	50.d	59.d	70.d	83.d	96.d
	28.0	40.d	44.d	53.d	63.d	74.d	86.d
	29.0		40.d	48.d	57.d	67.d	78.d
	30.0			43.d	51.d	60.d	70.d

IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 9	Light Weight Concrete = 110 lb/ft ³						
SLAB WEIGHT (psf)	38.6	40.9	45.5	50.0	54.6	59.2	63.8
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	13.4	13.0	12.5	12.0	11.6	11.2	10.8
MAX. UNSHORED 2 SPAN (ft)	15.5	15.1	14.5	13.8	12.9	12.2	11.5
MAX. UNSHORED 3 SPAN (ft)	15.7	15.3	14.6	14.0	13.5	13.1	12.6
I _u in ⁴	25.2	27.7	33.4	39.8	47.0	55.1	64.2
I _c in ⁴	14.5	15.9	18.9	22.2	25.8	29.8	34.1
DEFL. PARAMETER (LLDP)	312	343	411	487	573	668	773
DEFL. PARAMETER (SWDP)	1.17	1.12	1.04	0.959	0.887	0.820	0.758
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	316.d	347.d	412	455	498	540
	15.0	257.d	282.d	338.d	391	428	465
	16.0	212.d	233.d	279.d	331.d	371	403
	17.0	176.d	194.d	232.d	276.d	324.d	352
	18.0	149.d	163.d	196.d	232.d	273.d	309
	19.0	126.d	139.d	167.d	197.d	232.d	270.d
	20.0	108.d	119.d	143.d	169.d	199.d	232.d
	21.0	94.d	103.d	123.d	146.d	172.d	200.d
	22.0	81.d	90.d	107.d	127.d	149.d	174.d
	23.0	71.d	78.d	94.d	111.d	131.d	152.d
	24.0	63.d	69.d	83.d	98.d	115.d	134.d
	25.0	55.d	61.d	73.d	87.d	102.d	119.d
	26.0	49.d	54.d	65.d	77.d	91.d	106.d
	27.0	44.d	48.d	58.d	69.d	81.d	94.d
	28.0		43.d	52.d	62.d	72.d	84.d
	29.0			47.d	56.d	65.d	76.d
	30.0			42.d	50.d	59.d	69.d

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 3: CS120 LWC - #9 Rebar

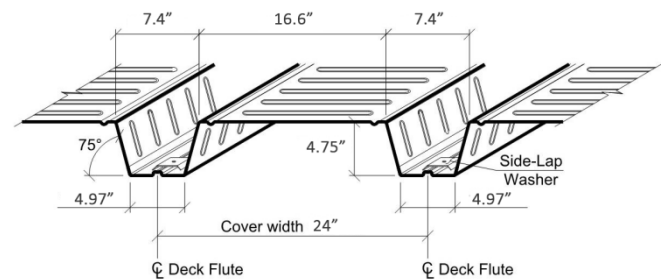



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 4: CS120 NWC - #3 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 3	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	47.5	50.5	56.6	62.6	68.7	74.7	80.7
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	11.3	11.1	10.6	10.1	9.70	9.40	9.10
MAX. UNSHORED 2 SPAN (ft)	11.1	10.6	9.70	9.00	8.30	7.80	7.30
MAX. UNSHORED 3 SPAN (ft)	12.6	12.0	11.0	10.2	9.50	8.90	8.30
I _u in ⁴	22.5	24.7	29.6	35.1	41.4	48.6	56.6
I _c in ⁴	9.40	10.1	11.7	13.5	15.4	17.4	19.6
DEFL. PARAMETER (LLDP)	251	274	325	382	447	519	599
DEFL. PARAMETER (SWDP)	1.61	1.56	1.46	1.36	1.26	1.17	1.09
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	110	117	131	144	158	172
	15.0	91	97	108	120	131	142
	16.0	76	81	90	100	109	118
	17.0	63	67	75	83	91	99
	18.0	52	56	62	69	75	82
	19.0	43	46	52	57	62	68
	20.0			42	47	51	56
	21.0					42	45
	22.0						
	23.0						
	24.0						
	25.0						
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						


TABLE 4: CS120 NWC - #3 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 3	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	47.9	50.9	57.0	63.0	69.0	75.1	81.1
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.2	11.9	11.3	10.9	10.4	10.1	9.70
MAX. UNSHORED 2 SPAN (ft)	14.1	13.6	12.5	11.5	10.7	10.0	9.40
MAX. UNSHORED 3 SPAN (ft)	14.2	13.9	13.2	12.7	12.2	11.4	10.7
I _u in ⁴	22.9	25.1	30.0	35.6	42.0	49.2	57.4
I _c in ⁴	10.0	10.8	12.5	14.4	16.5	18.7	21.1
DEFL. PARAMETER (LLDP)	259	283	335	394	460	534	617
DEFL. PARAMETER (SWDP)	1.60	1.55	1.45	1.35	1.25	1.16	1.08
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	126	134	151	167	183	199
	15.0	105	112	126	139	153	166
	16.0	88	94	105	117	128	139
	17.0	74	79	88	98	107	117
	18.0	62	66	74	82	90	98
	19.0	52	56	62	69	76	82
	20.0	44	46	52	58	63	69
	21.0			43	48	53	57
	22.0					43	47
	23.0						41
	24.0						
	25.0						
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						

TABLE 4: CS120 NWC - #3 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 3	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.3	51.3	57.3	63.4	69.4	75.5	81.5
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	13.0	12.6	12.1	11.5	11.1	10.7	10.4
MAX. UNSHORED 2 SPAN (ft)	15.0	14.6	13.9	13.3	12.8	12.3	11.7
MAX. UNSHORED 3 SPAN (ft)	15.1	14.8	14.1	13.5	12.9	12.5	12.1
I _u in ⁴	23.3	25.6	30.6	36.3	42.7	50.0	58.2
I _c in ⁴	10.7	11.5	13.4	15.4	17.7	20.1	22.6
DEFL. PARAMETER (LLDP)	267	292	346	407	475	551	636
DEFL. PARAMETER (SWDP)	1.58	1.53	1.43	1.33	1.24	1.15	1.07
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	142	152	170	189	208	226
	15.0	119	127	143	158	174	190
	16.0	101	107	120	134	147	160
	17.0	85	91	102	113	124	135
	18.0	72	77	86	96	105	114
	19.0	61	65	73	81	89	97
	20.0	51	55	62	68	75	82
	21.0	43	46	52	58	63	69
	22.0			43	48	53	58
	23.0				40	44	48
	24.0						43
	25.0						
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 4: CS120 NWC - #3 Rebar

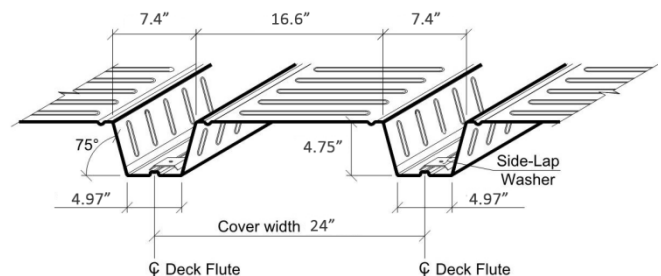



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

Rebar # 4	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	47.7	50.7	56.7	62.8	68.8	74.8	80.9
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	11.3	11.0	10.5	10.1	9.70	9.40	9.10
MAX. UNSHORED 2 SPAN (ft)	11.1	10.6	9.70	9.00	8.30	7.80	7.30
MAX. UNSHORED 3 SPAN (ft)	12.6	12.0	11.0	10.2	9.50	8.80	8.30
I _u in ⁴	22.8	25.1	30.0	35.6	42.0	49.3	57.4
I _c in ⁴	10.0	10.8	12.6	14.5	16.5	18.8	21.2
DEFL. PARAMETER (LLDP)	258	282	335	394	461	535	618
DEFL. PARAMETER (SWDP)	1.59	1.54	1.44	1.34	1.25	1.16	1.08
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	134	142	158	174	191	207
	15.0	112	119	132	146	159	173
	16.0	94	100	111	122	134	145
	17.0	79	84	94	103	113	122
	18.0	67	71	79	87	95	103
	19.0	56	60	66	73	80	87
	20.0	47	50	56	61	67	73
	21.0		42	47	51	56	61
	22.0				43	46	50
	23.0					41	44
	24.0						
	25.0						
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						


Rebar # 4	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.0	51.1	57.1	63.1	69.2	75.2	81.3
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.2	11.9	11.3	10.9	10.4	10.1	9.70
MAX. UNSHORED 2 SPAN (ft)	14.1	13.6	12.4	11.5	10.7	10.0	9.40
MAX. UNSHORED 3 SPAN (ft)	14.2	13.9	13.2	12.7	12.1	11.4	10.7
I _u in ⁴	23.2	25.5	30.5	36.2	42.6	49.9	58.2
I _c in ⁴	10.6	11.5	13.3	15.4	17.6	20.0	22.6
DEFL. PARAMETER (LLDP)	266	290	344	405	474	550	635
DEFL. PARAMETER (SWDP)	1.58	1.53	1.43	1.33	1.24	1.15	1.07
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	150	159	178	196	215	234
	15.0	126	134	149	165	181	196
	16.0	106	113	126	139	153	166
	17.0	90	96	107	118	129	140
	18.0	76	81	91	100	110	119
	19.0	65	69	77	85	93	101
	20.0	55	58	65	72	79	86
	21.0	47	49	55	61	67	73
	22.0		42	47	51	56	61
	23.0				43	47	51
	24.0					42	46
	25.0						
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						

Rebar # 4	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.4	51.4	57.5	63.5	69.6	75.6	81.6
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.9	12.6	12.0	11.5	11.1	10.7	10.3
MAX. UNSHORED 2 SPAN (ft)	15.0	14.6	13.9	13.3	12.8	12.3	11.7
MAX. UNSHORED 3 SPAN (ft)	15.1	14.7	14.1	13.5	12.9	12.5	12.1
I _u in ⁴	23.6	25.9	31.0	36.8	43.3	50.7	59.0
I _c in ⁴	11.3	12.2	14.2	16.4	18.8	21.4	24.2
DEFL. PARAMETER (LLDP)	274	300	355	418	488	567	654
DEFL. PARAMETER (SWDP)	1.56	1.51	1.42	1.32	1.23	1.14	1.06
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	166	176	197	218	239	260
	15.0	140	149	166	184	202	220
	16.0	118	126	141	156	171	186
	17.0	101	107	120	133	146	158
	18.0	86	91	102	113	124	135
	19.0	73	78	87	97	106	115
	20.0	63	67	75	83	91	99
	21.0	53	57	64	71	77	84
	22.0	45	48	54	60	66	72
	23.0		41	46	51	56	61
	24.0				43	47	51
	25.0					43	46
	26.0						
	27.0						
	28.0						
	29.0						
	30.0						

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 4: CS120 NWC - #4 Rebar

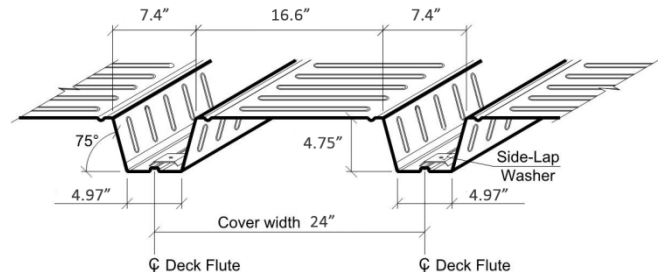



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

Base Steel Thickness = 0.0375 in.								
Rebar # 5	Normal Weight Concrete = 145 lb/ft ³							
SLAB WEIGHT (psf)	47.8	50.9	56.9	62.9	69.0	75.0	81.1	
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99	
MAX. UNSHORED 1 SPAN (ft)	11.3	11.0	10.5	10.1	9.70	9.40	9.10	
MAX. UNSHORED 2 SPAN (ft)	11.0	10.5	9.70	8.90	8.30	7.80	7.30	
MAX. UNSHORED 3 SPAN (ft)	12.5	12.0	11.0	10.2	9.50	8.80	8.30	
I _u in ⁴	23.2	25.5	30.5	36.2	42.7	50.1	58.4	
I _c in ⁴	10.7	11.6	13.5	15.7	18.0	20.4	23.1	
DEFL. PARAMETER (LLDP)	267	292	347	408	478	555	641	
DEFL. PARAMETER (SWDP)	1.58	1.52	1.42	1.33	1.23	1.14	1.06	
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0	
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)						
To be established by the designer.	14.0	163	173	192	212	231	251	270
	15.0	138	146	162	178	195	211	227
	16.0	117	123	137	151	165	179	192
	17.0	99	105	117	128	140	152	163
	18.0	85	90	100	109	119	129	139
	19.0	72	76	85	93	102	110	119
	20.0	62	65	72	80	87	94	101
	21.0	53	56	62	68	74	80	86
	22.0	45	47	53	58	63	68	73
	23.0		40	44	49	53	57	62
	24.0				41	45	48	52
	25.0							43
	26.0							
	27.0							
	28.0							
	29.0							
	30.0							


Base Steel Thickness = 0.0495 in.								
Rebar # 5	Normal Weight Concrete = 145 lb/ft ³							
SLAB WEIGHT (psf)	48.6	51.6	57.7	63.7	69.8	75.8	81.8	
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99	
MAX. UNSHORED 1 SPAN (ft)	12.9	12.6	12.0	11.5	11.1	10.7	10.3	
MAX. UNSHORED 2 SPAN (ft)	14.9	14.6	13.9	13.3	12.8	12.3	11.6	
MAX. UNSHORED 3 SPAN (ft)	15.1	14.7	14.0	13.5	12.9	12.5	12.1	
I _u in ⁴	24.0	26.3	31.5	37.4	44.0	51.5	60.0	
I _c in ⁴	11.9	12.9	15.1	17.5	20.1	22.9	26.0	
DEFL. PARAMETER (LLDP)	282	309	366	431	504	586	676	
DEFL. PARAMETER (SWDP)	1.55	1.50	1.40	1.30	1.21	1.12	1.04	
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0	
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)						
To be established by the designer.	14.0	194	207	231	255	279	303	328
	15.0	165	175	195	216	236	257	277
	16.0	140	149	167	184	201	219	236
	17.0	120	128	143	158	173	187	202
	18.0	103	110	122	135	148	161	174
	19.0	89	94	106	117	128	139	150
	20.0	77	81	91	101	110	120	129
	21.0	66	70	79	87	95	103	112
	22.0	57	61	68	75	82	89	96
	23.0	49	52	58	64	71	77	83
	24.0	42	45	50	55	60	66	71
	25.0			43	47	52	56	61
	26.0					44	48	51
	27.0						40	43
	28.0							
	29.0							
	30.0							

Base Steel Thickness = 0.0435 in.								
Rebar # 5	Normal Weight Concrete = 145 lb/ft ³							
SLAB WEIGHT (psf)	48.2	51.2	57.3	63.3	69.4	75.4	81.5	
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99	
MAX. UNSHORED 1 SPAN (ft)	12.2	11.9	11.3	10.8	10.4	10.1	9.70	
MAX. UNSHORED 2 SPAN (ft)	14.1	13.5	12.4	11.5	10.7	10.0	9.40	
MAX. UNSHORED 3 SPAN (ft)	14.2	13.9	13.2	12.7	12.1	11.3	10.6	
I _u in ⁴	23.5	25.8	31.0	36.8	43.3	50.8	59.1	
I _c in ⁴	11.3	12.2	14.3	16.5	19.0	21.6	24.5	
DEFL. PARAMETER (LLDP)	274	300	356	419	490	569	658	
DEFL. PARAMETER (SWDP)	1.56	1.51	1.41	1.31	1.22	1.13	1.05	
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0	
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)						
To be established by the designer.	14.0	179	190	212	234	255	277	299
	15.0	151	160	179	197	216	234	253
	16.0	129	136	152	168	183	199	215
	17.0	110	116	130	143	156	170	183
	18.0	94	100	111	122	134	145	157
	19.0	81	86	95	105	115	125	134
	20.0	69	73	82	90	99	107	115
	21.0	59	63	70	77	85	92	99
	22.0	51	54	60	66	72	79	85
	23.0	44	46	51	57	62	67	72
	24.0			44	48	53	57	61
	25.0				41	44	48	52
	26.0						40	43
	27.0							
	28.0							
	29.0							
	30.0							

NOTES:

1. The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
2. The maximum unshored span conditions above establish the number of shores required.
3. "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
4. "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
5. I_u is the uncracked moment of inertia based on equivalent steel.
6. I_c is the cracked moment of inertia based on equivalent steel.
7. An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 4: CS120 NWC - #5 Rebar

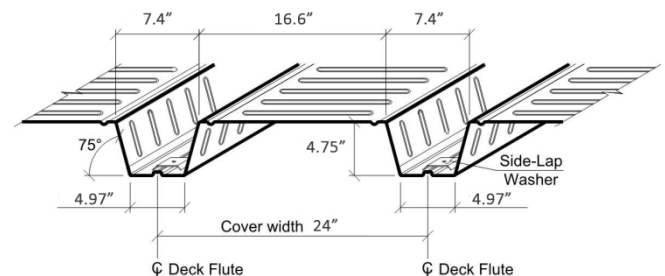



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 4: CS120 NWC - #6 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 6	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.1	51.1	57.1	63.2	69.2	75.3	81.3
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	11.3	11.0	10.5	10.1	9.70	9.40	9.10
MAX. UNSHORED 2 SPAN (ft)	11.0	10.5	9.70	8.90	8.30	7.80	7.30
MAX. UNSHORED 3 SPAN (ft)	12.5	12.0	11.0	10.1	9.40	8.80	8.30
I _u in ⁴	23.6	25.9	31.1	36.9	43.6	51.1	59.5
I _c in ⁴	11.5	12.5	14.6	17.0	19.5	22.3	25.3
DEFL. PARAMETER (LLDP)	276	302	360	424	497	577	667
DEFL. PARAMETER (SWDP)	1.56	1.50	1.40	1.31	1.21	1.12	1.04
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	198	210	233	256	279	303
	15.0	168	178	197	217	237	256
	16.0	143	151	168	185	202	218
	17.0	123	130	144	158	173	187
	18.0	106	112	124	136	148	161
	19.0	91	96	107	117	128	139
	20.0	79	83	92	101	110	119
	21.0	68	72	80	87	95	103
	22.0	59	62	69	76	82	89
	23.0	51	54	59	65	71	77
	24.0	44	46	51	56	61	66
	25.0			44	48	52	56
	26.0				41	44	48
	27.0						40
	28.0						
	29.0						
	30.0						


TABLE 4: CS120 NWC - #6 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 6	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.5	51.5	57.5	63.6	69.6	75.6	81.7
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.1	11.8	11.3	10.8	10.4	10.1	9.70
MAX. UNSHORED 2 SPAN (ft)	14.0	13.5	12.4	11.5	10.7	10.0	9.30
MAX. UNSHORED 3 SPAN (ft)	14.2	13.8	13.2	12.6	12.1	11.3	10.6
I _u in ⁴	23.9	26.3	31.5	37.4	44.1	51.7	60.2
I _c in ⁴	12.0	13.1	15.3	17.8	20.5	23.5	26.6
DEFL. PARAMETER (LLDP)	283	310	369	435	509	591	683
DEFL. PARAMETER (SWDP)	1.55	1.49	1.39	1.30	1.20	1.12	1.03
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	213	226	252	277	303	329
	15.0	181	192	214	235	257	279
	16.0	155	164	183	201	220	238
	17.0	133	141	157	173	189	205
	18.0	115	121	135	149	163	176
	19.0	99	105	117	129	141	153
	20.0	86	91	101	112	122	132
	21.0	75	79	88	97	106	115
	22.0	65	69	76	84	92	99
	23.0	56	59	66	73	79	86
	24.0	49	51	57	63	69	74
	25.0	42	44	49	54	59	64
	26.0			42	47	51	55
	27.0					43	47
	28.0						43
	29.0						
	30.0						

TABLE 4: CS120 NWC - #6 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 6	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.8	51.9	57.9	63.9	70.0	76.0	82.1
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.9	12.6	12.0	11.5	11.1	10.7	10.3
MAX. UNSHORED 2 SPAN (ft)	14.9	14.5	13.9	13.3	12.8	12.3	11.6
MAX. UNSHORED 3 SPAN (ft)	15.1	14.7	14.0	13.4	12.9	12.5	12.0
I _u in ⁴	24.3	26.7	32.0	38.0	44.8	52.5	61.1
I _c in ⁴	12.7	13.8	16.1	18.8	21.6	24.7	28.1
DEFL. PARAMETER (LLDP)	291	319	379	447	523	607	701
DEFL. PARAMETER (SWDP)	1.53	1.48	1.38	1.28	1.19	1.11	1.03
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	228	242	270	298	326	355
	15.0	194	206	230	254	278	301
	16.0	166	176	197	217	238	258
	17.0	143	152	169	187	204	222
	18.0	124	131	146	162	177	192
	19.0	107	114	127	140	153	166
	20.0	93	99	110	122	133	145
	21.0	81	86	96	106	116	126
	22.0	71	75	84	92	101	110
	23.0	61	65	73	80	88	95
	24.0	53	57	63	70	76	83
	25.0	46	49	55	61	66	72
	26.0	40	43	48	52	57	62
	27.0			41	45	49	54
	28.0					42	46
	29.0						42
	30.0						

NOTES:

- The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
- The maximum unshored span conditions above establish the number of shores required.
- "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
- "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
- I_u is the uncracked moment of inertia based on equivalent steel.
- I_c is the cracked moment of inertia based on equivalent steel.
- An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 4: CS120 NWC - #6 Rebar

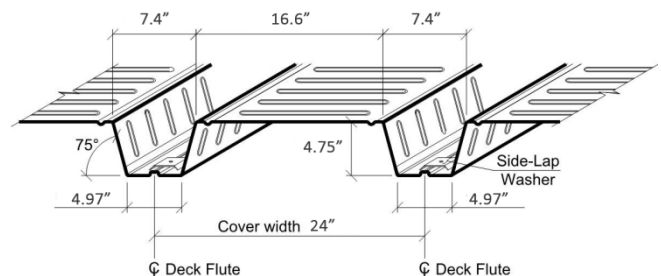



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

Rebar # 7	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.3	51.4	57.4	63.5	69.5	75.5	81.6
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	11.3	11.0	10.5	10.1	9.70	9.40	9.10
MAX. UNSHORED 2 SPAN (ft)	11.0	10.5	9.60	8.90	8.30	7.70	7.30
MAX. UNSHORED 3 SPAN (ft)	12.5	11.9	10.9	10.1	9.40	8.80	8.30
I _u in ⁴	24.0	26.4	31.7	37.7	44.5	52.1	60.7
I _c in ⁴	12.3	13.4	15.8	18.4	21.3	24.4	27.7
DEFL. PARAMETER (LLDP)	286	313	374	441	517	602	696
DEFL. PARAMETER (SWDP)	1.54	1.48	1.38	1.28	1.19	1.11	1.03
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	237	251	279	307	334	390
	15.0	202	214	237	261	285	332
	16.0	173	183	203	224	244	284
	17.0	149	158	175	193	210	245
	18.0	129	137	152	167	182	212
	19.0	112	119	132	145	158	184
	20.0	98	103	115	126	137	160
	21.0	85	90	100	110	120	139
	22.0	74	79	87	96	104	122
	23.0	65	69	76	84	91	106
	24.0	57	60	66	73	79	92
	25.0	49	52	58	64	69	80
	26.0	43	45	50	55	60	70
	27.0			43	48	52	60
	28.0				41	45	52
	29.0					41	44
	30.0						


Rebar # 7	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.7	51.7	57.8	63.8	69.9	75.9	82.0
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.1	11.8	11.3	10.8	10.4	10.0	9.70
MAX. UNSHORED 2 SPAN (ft)	14.0	13.4	12.4	11.4	10.6	9.90	9.30
MAX. UNSHORED 3 SPAN (ft)	14.2	13.8	13.2	12.6	12.1	11.3	10.6
I _u in ⁴	24.3	26.8	32.1	38.2	45.0	52.8	61.4
I _c in ⁴	12.8	14.0	16.5	19.2	22.2	25.5	29.0
DEFL. PARAMETER (LLDP)	292	321	382	451	529	615	711
DEFL. PARAMETER (SWDP)	1.53	1.48	1.37	1.28	1.18	1.10	1.02
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	252	267	297	327	358	418
	15.0	215	227	253	279	305	356
	16.0	184	195	217	239	262	306
	17.0	159	168	188	207	226	264
	18.0	138	146	163	179	196	229
	19.0	118.d	127	141	156	170	199
	20.0	102.d	111	123	136	149	174
	21.0	88.d	96.d	108	119	130	152
	22.0	76.d	84.d	95	104	114	133
	23.0	67.d	73.d	83	91	100	116
	24.0	59.d	64.d	73	80	87	102
	25.0	52.d	57.d	63	70	76	89
	26.0	46.d	50	55	61	66	78
	27.0	41	43	48	53	58	67
	28.0			42	46	50	58
	29.0					43	47
	30.0						43

Rebar # 7	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	49.1	52.1	58.2	64.2	70.3	76.3	82.3
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.9	12.6	12.0	11.5	11.1	10.7	10.3
MAX. UNSHORED 2 SPAN (ft)	14.9	14.5	13.8	13.3	12.8	12.3	11.6
MAX. UNSHORED 3 SPAN (ft)	15.1	14.7	14.0	13.4	12.9	12.4	12.0
I _u in ⁴	24.7	27.2	32.6	38.8	45.7	53.5	62.3
I _c in ⁴	13.4	14.6	17.2	20.1	23.2	26.7	30.3
DEFL. PARAMETER (LLDP)	300	329	392	463	542	631	729
DEFL. PARAMETER (SWDP)	1.51	1.46	1.36	1.26	1.17	1.09	1.01
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	266	282	315	348	380	446
	15.0	227	241	269	297	325	380
	16.0	195	207	231	255	279	327
	17.0	169	179	200	220	241	282
	18.0	143.d	155	173	191	209	245
	19.0	122.d	133.d	151	167	182	214
	20.0	104.d	114.d	132	146	160	187
	21.0	90.d	99.d	116	128	140	164
	22.0	78.d	86.d	102	112	123	144
	23.0	69.d	75.d	89	99	108	126
	24.0	60.d	66.d	78	87	95	111
	25.0	53.d	59.d	69	76	83	97
	26.0	47.d	52.d	60	67	73	85
	27.0	42.d	46.d	53	58	64	75
	28.0		41	46	51	56	65
	29.0				44	48	57
	30.0					42	49

NOTES:

- The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
- The maximum unshored span conditions above establish the number of shores required.
- "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
- "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
- I_u is the uncracked moment of inertia based on equivalent steel.
- I_c is the cracked moment of inertia based on equivalent steel.
- An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 4: CS120 NWC - #7 Rebar

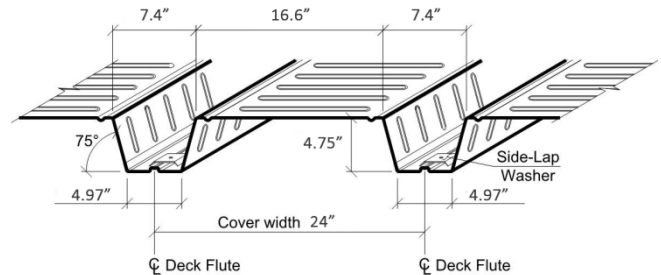



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

TABLE 4: CS120 NWC - #8 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0375 in.							
Rebar # 8	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	48.7	51.7	57.7	63.8	69.8	75.8	81.9
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	11.3	11.0	10.5	10.1	9.70	9.30	9.00
MAX. UNSHORED 2 SPAN (ft)	10.9	10.5	9.60	8.90	8.30	7.70	7.20
MAX. UNSHORED 3 SPAN (ft)	12.4	11.9	10.9	10.1	9.40	8.80	8.20
I _u in ⁴	24.4	26.9	32.3	38.5	45.4	53.3	62.1
I _c in ⁴	13.2	14.4	17.0	19.9	23.1	26.5	30.2
DEFL. PARAMETER (LLDP)	296	325	388	459	539	628	726
DEFL. PARAMETER (SWDP)	1.52	1.47	1.36	1.26	1.17	1.09	1.01
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	280	296	330	363	396	429
	15.0	239	253	281	310	338	366
	16.0	200.d	218	242	266	291	315
	17.0	167.d	184.d	210	231	252	273
	18.0	141.d	155.d	182	201	219	237
	19.0	120.d	131.d	157.d	175	191	207
	20.0	103.d	113.d	135.d	153	167	181
	21.0	89.d	97.d	116.d	135	147	159
	22.0	77.d	85.d	101.d	118	129	140
	23.0	67.d	74.d	89.d	104	114	123
	24.0	59.d	65.d	78.d	92	100	108
	25.0	53.d	58.d	69.d	81	88	95
	26.0	47.d	51.d	61.d	71	78	84
	27.0	42.d	46.d	55.d	63	68	74
	28.0		41.d	49.d	55	60	65
	29.0			44	48	52	56
	30.0				42	45	49


TABLE 4: CS120 NWC - #8 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0435 in.							
Rebar # 8	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	49.0	52.1	58.1	64.1	70.2	76.2	82.3
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.1	11.8	11.3	10.8	10.4	10.0	9.70
MAX. UNSHORED 2 SPAN (ft)	14.0	13.4	12.3	11.4	10.6	9.90	9.30
MAX. UNSHORED 3 SPAN (ft)	14.1	13.8	13.2	12.6	12.0	11.3	10.6
I _u in ⁴	24.7	27.2	32.7	39.0	46.0	53.9	62.8
I _c in ⁴	13.7	14.9	17.7	20.7	24.0	27.6	31.4
DEFL. PARAMETER (LLDP)	302	332	396	469	550	641	741
DEFL. PARAMETER (SWDP)	1.51	1.46	1.35	1.26	1.16	1.08	1.00
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	294	312	347	383	418	454
	15.0	249.d	266	297	327	358	388
	16.0	205.d	225.d	256	282	308	334
	17.0	171.d	188.d	221	244	267	289
	18.0	144.d	158.d	189.d	213	232	252
	19.0	122.d	134.d	161.d	186	203	220
	20.0	105.d	115.d	138.d	163.d	178	193
	21.0	91.d	99.d	119.d	141.d	157	170
	22.0	79.d	87.d	103.d	122.d	138	150
	23.0	69.d	76.d	91.d	107.d	122	132
	24.0	61.d	67.d	80.d	94.d	108	117
	25.0	54.d	59.d	70.d	83.d	95	103
	26.0	48.d	52.d	63.d	74.d	84	91
	27.0	43.d	47.d	56.d	66.d	74	80
	28.0		42.d	50.d	59.d	65	71
	29.0			45.d	52	57	62
	30.0			41.d	46	50	54

TABLE 4: CS120 NWC - #8 REBAR							
IMPERIAL UNITS							
Base Steel Thickness = 0.0495 in.							
Rebar # 8	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	49.4	52.4	58.5	64.5	70.6	76.6	82.7
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.9	12.5	12.0	11.5	11.0	10.7	10.3
MAX. UNSHORED 2 SPAN (ft)	14.9	14.5	13.8	13.2	12.7	12.3	11.6
MAX. UNSHORED 3 SPAN (ft)	15.0	14.7	14.0	13.4	12.9	12.4	12.0
I _u in ⁴	25.1	27.7	33.2	39.5	46.6	54.6	63.6
I _c in ⁴	14.2	15.5	18.4	21.5	25.0	28.7	32.8
DEFL. PARAMETER (LLDP)	310	340	406	480	563	656	758
DEFL. PARAMETER (SWDP)	1.50	1.45	1.34	1.25	1.15	1.07	0.992
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	308	327	365	402	440	478
	15.0	255.d	279	312	344	377	409
	16.0	210.d	231.d	269	297	325	353
	17.0	175.d	192.d	230.d	257	282	306
	18.0	148.d	162.d	193.d	224	246	267
	19.0	125.d	138.d	164.d	195.d	215	233
	20.0	108.d	118.d	141.d	167.d	189	205
	21.0	93.d	102.d	122.d	144.d	166	181
	22.0	81.d	89.d	106.d	125.d	147	160
	23.0	71.d	78.d	93.d	110.d	129.d	141
	24.0	62.d	68.d	82.d	97.d	113.d	125
	25.0	55.d	60.d	72.d	85.d	100.d	111
	26.0	49.d	54.d	64.d	76.d	89.d	98
	27.0	44.d	48.d	57.d	68.d	79.d	87
	28.0		43.d	51.d	61.d	70	77
	29.0			46.d	55.d	62	67
	30.0			42.d	49.d	55	59

NOTES:

- The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
- The maximum unshored span conditions above establish the number of shores required.
- "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
- "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
- I_u is the uncracked moment of inertia based on equivalent steel.
- I_c is the cracked moment of inertia based on equivalent steel.
- An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 4: CS120 NWC - #8 Rebar

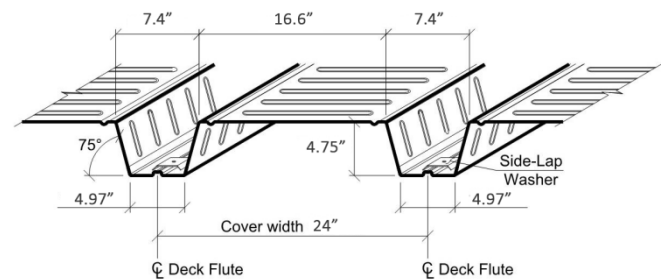



EVALUATION REPORT

Number: 277

Originally Issued: 06/10/2016

Revised: 06/23/2025

Valid Through: 06/30/2026

Rebar # 9	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	49.0	52.0	58.1	64.1	70.2	76.2	82.3
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	11.2	11.0	10.5	10.0	9.70	9.30	9.00
MAX. UNSHORED 2 SPAN (ft)	10.9	10.4	9.60	8.80	8.20	7.70	7.20
MAX. UNSHORED 3 SPAN (ft)	12.4	11.8	10.9	10.1	9.40	8.70	8.20
I _u in ⁴	24.8	27.4	33.0	39.3	46.4	54.5	63.5
I _c in ⁴	14.0	15.4	18.3	21.5	25.0	28.8	32.9
DEFL. PARAMETER (LLDP)	306	336	403	478	562	655	758
DEFL. PARAMETER (SWDP)	1.51	1.45	1.34	1.24	1.15	1.07	0.988
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	309.d	340.d	386	425	464	503
	15.0	252.d	277.d	330	364	397	431
	16.0	207.d	228.d	273.d	314	343	372
	17.0	173.d	190.d	228.d	270.d	298	323
	18.0	146.d	160.d	192.d	228.d	260	282
	19.0	124.d	136.d	163.d	194.d	228.d	247
	20.0	106.d	117.d	140.d	166.d	195.d	217
	21.0	92.d	101.d	121.d	143.d	169.d	192
	22.0	80.d	88.d	105.d	125.d	147.d	170
	23.0	70.d	77.d	92.d	109.d	128.d	150.d
	24.0	61.d	68.d	81.d	96.d	113.d	132.d
	25.0	54.d	60.d	72.d	85.d	100.d	116.d
	26.0	48.d	53.d	64.d	76.d	89.d	104.d
	27.0	43.d	47.d	57.d	67.d	79.d	92.d
	28.0		43.d	51.d	60.d	71.d	83.d
	29.0			46.d	54.d	64.d	73
	30.0			41.d	49.d	58.d	65


Rebar # 9	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	49.8	52.8	58.8	64.9	70.9	77.0	83.0
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.8	12.5	12.0	11.5	11.0	10.6	10.3
MAX. UNSHORED 2 SPAN (ft)	14.8	14.5	13.8	13.2	12.7	12.3	11.5
MAX. UNSHORED 3 SPAN (ft)	15.0	14.6	14.0	13.4	12.9	12.4	12.0
I _u in ⁴	25.6	28.2	33.9	40.3	47.6	55.8	65.0
I _c in ⁴	15.1	16.5	19.6	23.0	26.8	30.9	35.3
DEFL. PARAMETER (LLDP)	320	351	421	498	585	682	789
DEFL. PARAMETER (SWDP)	1.49	1.43	1.32	1.23	1.14	1.05	0.974
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	323.d	356.d	419	463	507	551
	15.0	263.d	289.d	346.d	397	435	473
	16.0	217.d	238.d	285.d	338.d	376	409
	17.0	181.d	199.d	238.d	282.d	327	355
	18.0	152.d	167.d	200.d	237.d	279.d	311
	19.0	129.d	142.d	170.d	202.d	237.d	273
	20.0	111.d	122.d	146.d	173.d	203.d	237.d
	21.0	96.d	105.d	126.d	149.d	176.d	205.d
	22.0	83.d	92.d	110.d	130.d	153.d	178.d
	23.0	73.d	80.d	96.d	114.d	134.d	156.d
	24.0	64.d	71.d	85.d	100.d	118.d	137.d
	25.0	57.d	62.d	75.d	89.d	104.d	121.d
	26.0	51.d	56.d	66.d	79.d	92.d	108.d
	27.0	45.d	50.d	59.d	70.d	83.d	96.d
	28.0	40.d	44.d	53.d	63.d	74.d	86.d
	29.0		40.d	48.d	57.d	67.d	78.d
	30.0			43.d	51.d	60.d	70.d

Rebar # 9	Normal Weight Concrete = 145 lb/ft ³						
SLAB WEIGHT (psf)	49.4	52.4	58.5	64.5	70.6	76.6	82.6
CONCRETE VOLUME (yd ³ /100ft ²)	1.15	1.22	1.38	1.53	1.69	1.84	1.99
MAX. UNSHORED 1 SPAN (ft)	12.1	11.8	11.2	10.8	10.4	10.0	9.70
MAX. UNSHORED 2 SPAN (ft)	14.0	13.3	12.3	11.4	10.6	9.90	9.30
MAX. UNSHORED 3 SPAN (ft)	14.1	13.8	13.1	12.6	12.0	11.2	10.5
I _u in ⁴	25.2	27.7	33.4	39.8	47.0	55.1	64.2
I _c in ⁴	14.5	15.9	18.9	22.2	25.8	29.8	34.1
DEFL. PARAMETER (LLDP)	312	343	411	487	573	668	773
DEFL. PARAMETER (SWDP)	1.50	1.44	1.34	1.24	1.15	1.06	0.982
SLAB THICKNESS (in.)	7.25	7.50	8.0	8.50	9.0	9.50	10.0
SHORING	SPAN (ft)	MAXIMUM SPECIFIED LOADS (psf)					
To be established by the designer.	14.0	316.d	347.d	402	444	486	527
	15.0	257.d	282.d	338.d	381	416	452
	16.0	212.d	233.d	279.d	329	360	390
	17.0	176.d	194.d	232.d	276.d	312	339
	18.0	149.d	163.d	196.d	232.d	273.d	296
	19.0	126.d	139.d	167.d	197.d	232.d	260
	20.0	108.d	119.d	143.d	169.d	199.d	229
	21.0	94.d	103.d	123.d	146.d	172.d	200.d
	22.0	81.d	90.d	107.d	127.d	149.d	174.d
	23.0	71.d	78.d	94.d	111.d	131.d	152.d
	24.0	63.d	69.d	83.d	98.d	115.d	134.d
	25.0	55.d	61.d	73.d	87.d	102.d	119.d
	26.0	49.d	54.d	65.d	77.d	91.d	106.d
	27.0	44.d	48.d	58.d	69.d	81.d	94.d
	28.0		43.d	52.d	62.d	72.d	84.d
	29.0			47.d	56.d	65.d	76.d
	30.0			42.d	50.d	59.d	69.d

NOTES:

- The "SLAB WEIGHT" is made up of the self-weight of the steel deck, the reinforcing bar, and the concrete slab, which has been accounted for in the strength values of the load table.
- The maximum unshored span conditions above establish the number of shores required.
- "d" next to values in the Table indicates instantaneous deflection controls due to superimposed loads.
- "SLAB THICKNESS" is measured from the top of the concrete to the bottom of the steel deck.
- I_u is the uncracked moment of inertia based on equivalent steel.
- I_c is the cracked moment of inertia based on equivalent steel.
- An explanation of deflection parameters SLDP & SWDP is in the example on page 2.

TABLE 4: CS120 NWC - #9 Rebar

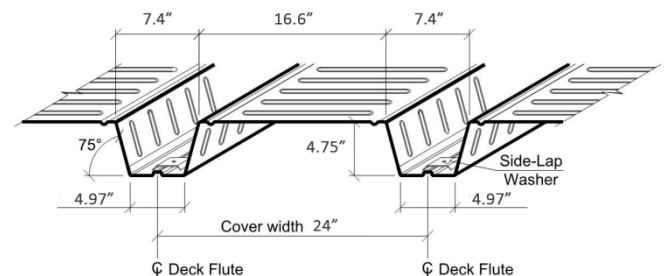



CALIFORNIA SUPPLEMENT

BAILEY METAL PRODUCTS LIMITED

1 Caldari Road
Concord, ON L4K 3Z9
CANADA
(905) 738-9267
www.bmp-group.com

COMSLAB FLOOR SYSTEM

CSI Sections:

05 00 00 Metals
05 31 00 Steel Decking
05 31 13 Steel Floor Decking

1.0 RECOGNITION

The ComSlab Floor System evaluated in IAPMO UES ER-277 and this supplement, complies with the following codes, subject to the additional requirements in Section 2.0 of this supplement:

- 2019 California Building Code (CBC), Title 24 Part 2.

2.0 LIMITATIONS

Use of the ComSlab Floor System recognized in ER-277 and this report supplement is subject to the following limitations:

2.1 The design and installation of the ComSlab Floor System shall be in accordance with the 2018 International Building Code, as noted in ER-277.

2.2 Special Inspections are required in accordance with CBC Section 1705.2, Steel Construction, and Section 1705.3, Concrete Construction. For work under the DSA and HCAi, (formerly OSHPD), special inspections are required in accordance with CBC Section 1705A.2, Steel Construction, and Section 1705A.3, Concrete Construction.

2.3 Structural Observation is required in accordance with CBC Sections 1704.6, and for work under the DSA and HCAi (formerly OSHPD), Section 1704A.6.

2.4 Concrete materials shall comply with CBC Section 1909.2 and for work under the DSA and HCAi (formerly OSHPD), Sections 1903A and 1910A.

2.5 This supplement expires concurrently with ER-277.

For additional information about this evaluation report please visit

www.uniform-es.org or email us at info@uniform-es.org



FLORIDA SUPPLEMENT

BAILEY METAL PRODUCTS LIMITED

1 Caldari Road
Concord, ON L4K 3Z9
CANADA
(905) 738-9267
www.bmp-group.com

COMSLAB FLOOR SYSTEM

CSI Sections:

05 00 00 Metals
05 31 00 Steel Decking
05 31 13 Steel Floor Decking

1.0 RECOGNITION

The ComSlab Floor System evaluated in IAPMO UES ER-277 and this supplement, complies with the following code, subject to the additional requirements in Section 2.0 of this supplement:

- 2020 Florida Building Code, Building (FBC, Building)

2.0 LIMITATIONS

Use of the ComSlab Floor System recognized in ER-277 and this report supplement is subject to the following limitations:

2.1 The design and installation of the ComSlab Floor System shall be in accordance with the 2018 International Building Code, as noted in ER-277.

2.2 Construction documents, including calculations showing compliance with FBC, Building Sections 107 and 1603, and this report shall be submitted to the building official. The construction documents shall be prepared by a registered design professional where required by Chapter 471, Florida Statutes, or Chapter 481, Florida Statutes.

2.3 Special Inspections are required for threshold buildings in accordance with FBC, Building Section 110.8.

2.4 Installations in high-velocity hurricane zones (HVHZ) are subject to applicable provisions in the FBC, Building Section 2222.

2.5 Verification shall be provided that a quality assurance agency audits the manufacturer's quality assurance program and audits the production quality of products, in accordance with Section (5)(d) of Florida Rule 61G20-3.008. The quality assurance agency shall be approved by the Commission (or the building official when the report holder does not possess an approval from the Commission).

2.6 This supplement expires concurrently with ER-277.

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org



CITY OF NEW YORK SUPPLEMENT

BAILEY METAL PRODUCTS LIMITED

1 Caldari Road
Concord, ON L4K 3Z9
CANADA
(905) 738-9267
www.bmp-group.com

COMSLAB FLOOR SYSTEM

CSI Sections:

- 05 00 00 Metals
- 05 31 00 Steel Decking
- 05 31 13 Steel Floor Decking

1.0 RECOGNITION

The ComSlab Floor System evaluated in IAPMO UES ER-277 and this supplement, complies with the following code, subject to the additional requirements in Section 2.0 of this supplement:

- 2014 New York City Building Code (NYCBC)
Section 2209.2

2.0 LIMITATIONS

Use of the ComSlab Floor System recognized in ER-277 and this report supplement is subject to the following limitations:

2.1 The design, installation, and inspection of the ComSlab Floor System shall be in accordance with the 2012 International Building Code, as noted in ER-277.

2.2 Special Inspections are required in accordance with NYCBC Section 1704.1, Section 1704.3, Steel Construction, and Section 1704.4 Concrete Construction.

2.3 This supplement expires concurrently with ER-277.

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org



CITY OF CHICAGO SUPPLEMENT

BAILEY METAL PRODUCTS LIMITED

**1 Caldari Road
Concord, ON L4K 3Z9
CANADA
(905) 738-9267
www.bmp-group.com**

COMSLAB FLOOR SYSTEM

CSI Sections:

- 05 00 00 Metals**
- 05 31 00 Steel Decking**
- 05 31 13 Steel Floor Decking**

1.0 RECOGNITION

The ComSlab Floor System evaluated in IAPMO UES ER-277 and this supplement, complies with the following code, subject to the additional requirements in Section 2.0 of this supplement:

- 2019 Chicago Building Code (Title 14B)

2.0 LIMITATIONS

Use of the ComSlab Floor System recognized in ER-277 and this report supplement is subject to the following limitations:

2.1 The design, installation, and inspection of the ComSlab Floor System shall be in accordance with the 2018 International Building Code, as noted in ER-277.

2.2 A statement of special inspections shall be prepared by the registered design professional in responsible charge and submitted to the building official as set forth in Sections 1704.2.3 and 1704.3 of the Chicago Building Code.

2.3 Structural observations shall be provided where required by Sections 1706.1 or 1706.2 of the Chicago Building Code.

2.4 This supplement expires concurrently with ER-277.

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org